

SCNUS - UC4 - 1243GF - SORTH

Suntsu


USB

Number of Ports

Contact Plating
30u" Gold Plating

Termination Style
Solder

Mounting Style
Through Hole









Connector

USB-C 4.0

Number of Contacts

Female

Mounting Angle
Right

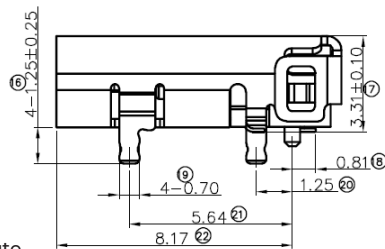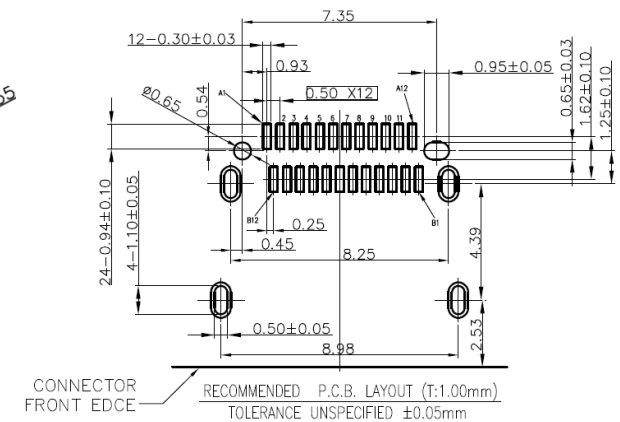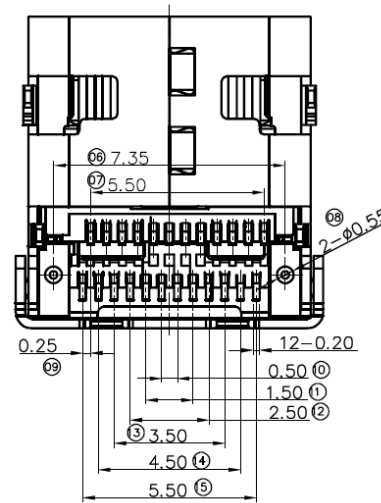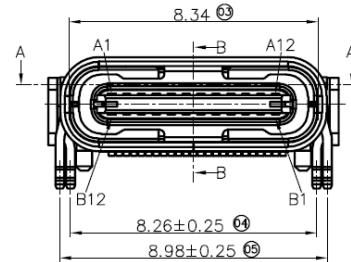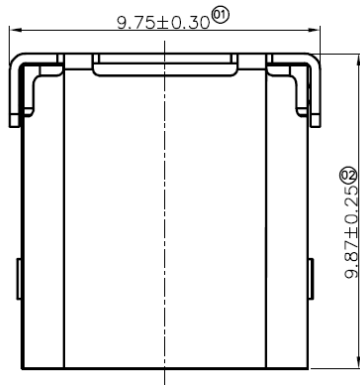

Specification

Current Rating: 5.0A

Contact Resistance: 40mΩ Max.

Insulation Resistance: 100MΩ Min.

Dielectric Voltage: 100V AC for one minute

Operation Temperature: -55°C to 85°C

Durability: 10,000 Cycles Min.

Insertion Force: 5N ~ 20N

Withdrawl Force: 8N ~ 20N



USB TYPE-C 4.0 FEMALE RIGHT ANGLE
SURFACE MOUNT CONNECTOR

Document History

Edits Made	Date	Edited By	Approved By
Initial Release	06/08/2022	B. Gibbons	KH Mun

Part No.	Drawn
SCNUS-UC4-1243GF-SORTH	B. Gibbons 06/08/2022
Scale	Tolerance
Not drawn to scale	0.° ±4° 0.° ±0.35 0.0° ±3° 0.0 ±0.30 0.00 ±0.25
Unit	Pages
mm	1/1