



TE Internal #: 603504-2

Butt Splice, 12 – 10 AWG Wire Size, 3 – 6 mm² Wire Size, Sealable, 6.1 mm [.24 in] Barrel Inside Diameter, 5180 – 13100 CMA Wire Size, Copper, Splices

[View on TE.com >](#)

Terminals & Splices > Splices



Splice Type: **Butt Splice**

Wire Size: **3 – 6 mm²**

Sealable: **Yes**

Compatible Insulation Diameter Range: **6.1 mm [.24 in]**

Features

Electrical Characteristics

Operating Voltage	600 V
-------------------	-------

Packaging Features

Packaging Quantity	50
Packaging Method	Loose Piece

Body Features

Weight	.007 oz
Insulation Material	Nylon
Insulation Type	Pre-Insulated
Primary Product Color	Yellow

Contact Features

Terminal Plating Material	Tin
Contact Base Material	Copper
Barrel Type	Closed

Dimensions

Recovered Inside Diameter	2.92 mm[.115 in]
---------------------------	------------------



Outside Diameter	6.35 mm[.25 in]
Wire Size	5180 – 13100 CMA
Compatible Insulation Diameter Range	6.1 mm[.24 in]
Barrel Inside Diameter	6.1 mm[.24 in]
Product Length	47.5 mm[1.87 in]

Product Type Features

Splice Type	Butt Splice
Sealable	Yes
Compatible With Discrete Wire Type	Stranded
Wire Insulation Support Retention Type	Insulation Support

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Usage Conditions

Insulation Option	Fully Insulated
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

Industry Standards

Government Qualified Splice	No
-----------------------------	----

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC

Halogen Content

Not Yet Reviewed for halogen content


Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Customers Also Bought




TE Part #327637
ADAPTER 12-10/16-14




TE Part #3-644465-3
03P MTA156 CONN ASSY 18AWG
ORA

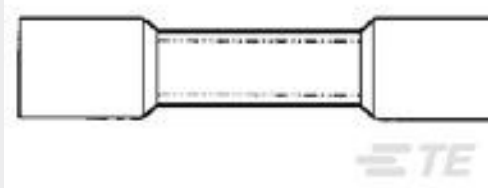


TE Part #55824-1
22-18 PRE-INSUL SEALED SPLICE

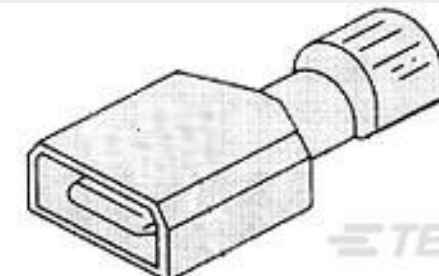

TE Part #3-520107-2
ULTRA-FAST 250 ASY TAB 16-14 AWG
TPBR

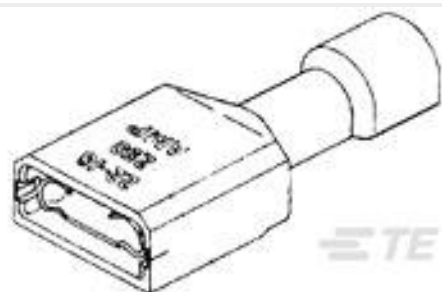

TE Part #3-350820-2
ULTRAFast 250 ASY REC 16-14
TPBR LP

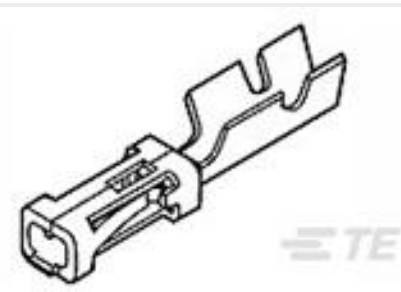

TE Part #87666-2
MOD IV RECP PLTD 30 SEL



TE Part #322455
TERMINAL, SOLIS R 12-10 10



TE Part #5555248-1
MJ, LPF, R/A, 8P/8C, SMT, PNL STOP



TE Part #8-52961-2
TERMINAL, PG SPR SPD 12-10 6

TE Part #6-23629-1
PIN, STRAIGHT, GROOVED, .3125 OD,
1.519 LG

Documents

Product Drawings

12-10 PRE-INSUL SEALED SPLICE



English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_603504-2_K.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_603504-2_K.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_603504-2_K.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_603504-2_N.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_603504-2_N.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_603504-2_N.2d_dxf.zip](#)

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.