




Connectors > Contacts > Connector Contacts

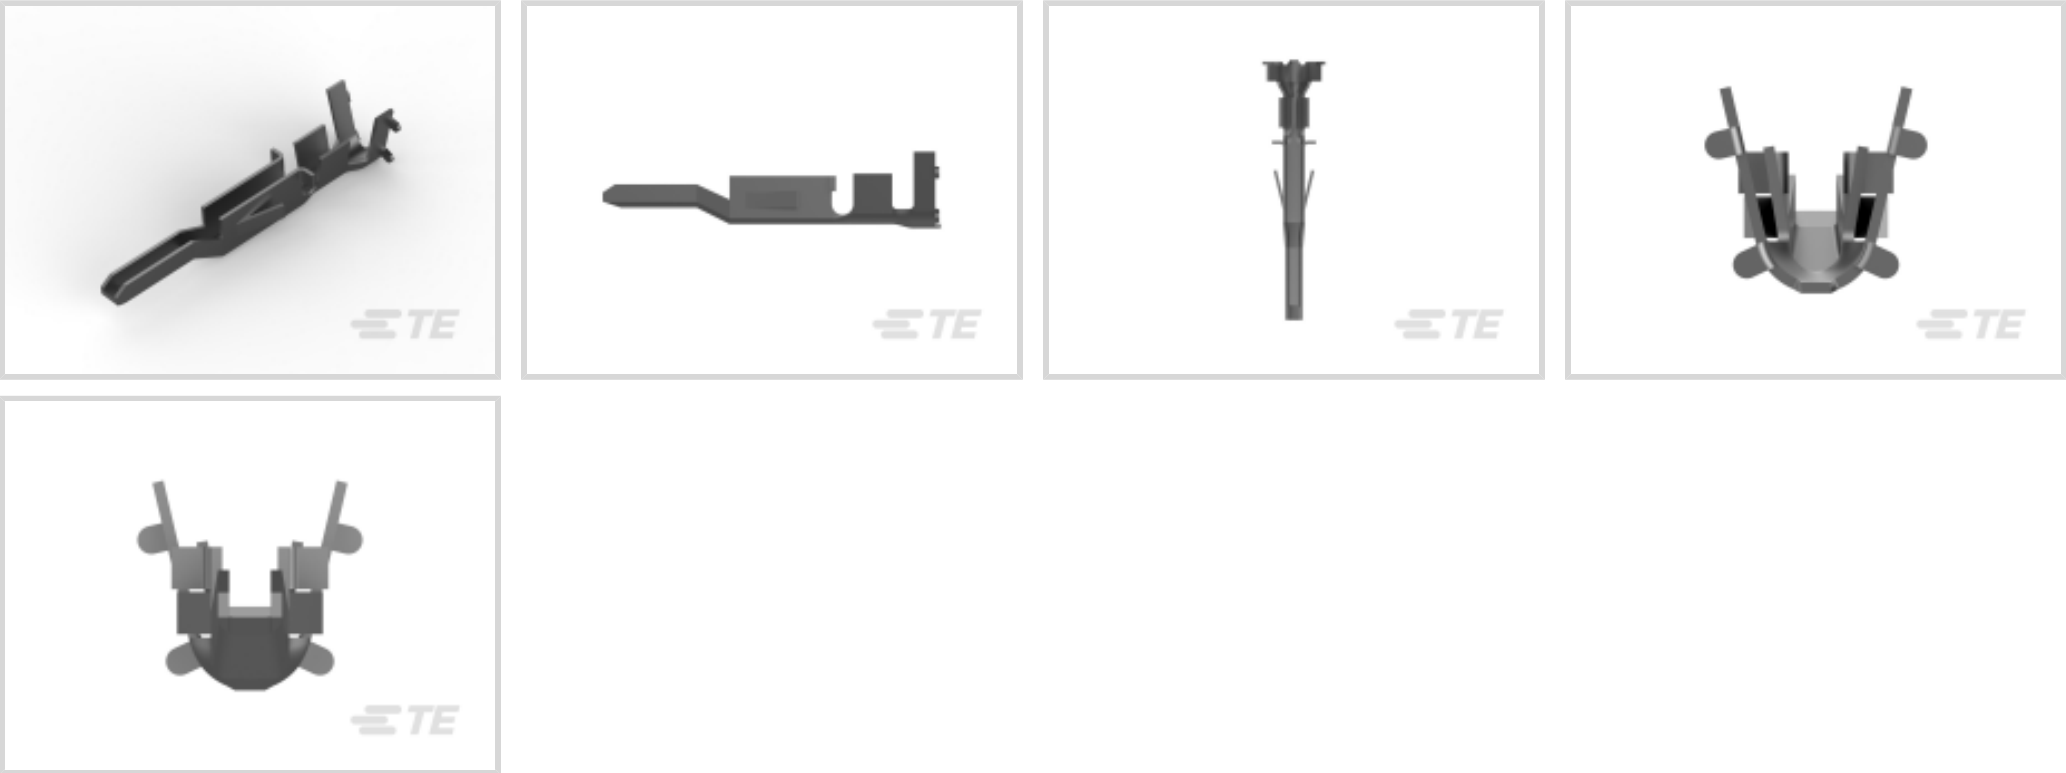

Contact Type: **Pin**

Contact Mating Area Plating Material: **Tin**

Wire Contact Termination Area Plating Material: **Pre-Tin**

Operating Voltage: **600 VAC**

Contact Retention Within Housing: **With**

Features

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Packaging Features

Packaging Quantity	3500
Packaging Method	Reel

Dimensions

Compatible Insulation Diameter Range	1.5 – 3.1 mm [.06 – .122 in]
Wire Size	.33 – .82 mm ²

Contact Features

Contact Orientation	Straight
Contact Mating Area Plating Material Thickness	2.54 µm [100 µin]
Mating Square Post Dimension	1.14 mm [.045 in]
Wire Contact Termination Area Plating Material Finish	Bright
Wire Contact Termination Area Plating Thickness	2.54 µm [100 µin]
Contact Type	Pin



Contact Mating Area Plating Material	Tin
Wire Contact Termination Area Plating Material	Pre-Tin
Contact Retention Within Housing	With
Contact Base Material	Brass
Contact Current Rating (Max)	9 A

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer




This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

 TE Part # 2825212-1 VAL-U-LOK PIN HCS TN 22-18 LP	 TE Part # 2825213-1 VAL-U-LOK SKT HCS SN 22-18 LP	 TE Part # 2151096-1 OCEAN-2.0-APPLICATOR-S-062F125F-RSM	 TE Part # 2238020-1 VAL-U-LOK PIN BR TN 22-18 LP
 TE Part # 2238021-1 VAL-U-LOK SKT BR SN 22-18 LP	 TE Part # 2151096-2 OCEAN-2.0-APPLICATOR-S-062F125FA-RSA	 TE Part # 2305570-1 Strip Terminal Cutter-Side Feed-No Crimp	 TE Part # 5-2151096-1 OCEAN-2.0-APPLICATOR-S-062F125F-RSM
 TE Part # 5-2151096-2 OCEAN-2.0-APPLICATOR-S-062F125FA-RSA	 TE Part # 7-2151096-7 OCEAN_2.0_SPARE_PART_KIT-062F125F	 TE Part # 7-2836879-7 OC-062F125F-752-CRIMPTOOLINGKIT	


Customers Also Bought

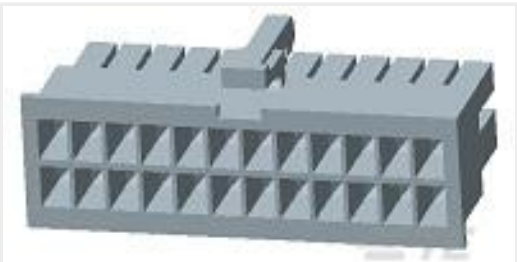


TE Part #1969614-6
6P RCPT VAL-U-LOK V0

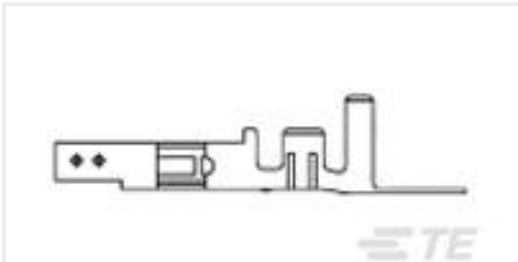

TE Part #2238019-1
VAL-U-LOK SKT BR SN 22-26AWG

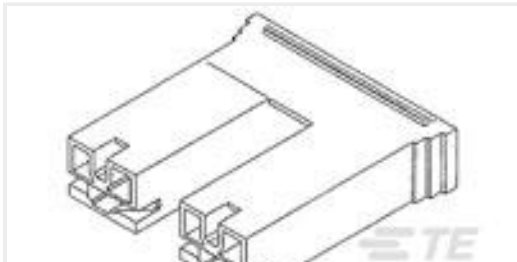

TE Part #1-520935-2
PL 250 HOUSING REC RED 6/6
NYLON V2

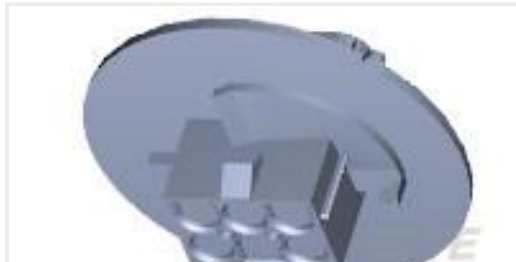

TE Part #794760-1
06P UMNLCAP HSG WHITE,PAN MNT



TE Part #63127-1
250 FASTON REC 22-18 AWG BR



TE Part #1969612-6
6P FH PLUG VAL-U-LOK V0



TE Part #3-647449-1
SL156 RCPT,SPCL LUBE, LF



TE Part #520988-3
ULTRA-POD 250 ASSY REC 22-18
AWG TPBR

Documents

Product Drawings

VAL-U-LOK PIN BR SN 18-22AWG

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2238016-1_A_c-2238016-1-a.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2238016-1_A_c-2238016-1-a.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2238016-1_A_c-2238016-1-a.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

1-1773730-3 VAL-U-LOK Connectors with TPA Flyer

English

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

2238016-1

Pin Contact, Tin, 600 VAC, 22 – 18 AWG Wire Size, .33 – .82 mm² Wire Size, Crimp,
Brass, Power, -40 – 105 °C [-40 – 221 °F]



English