




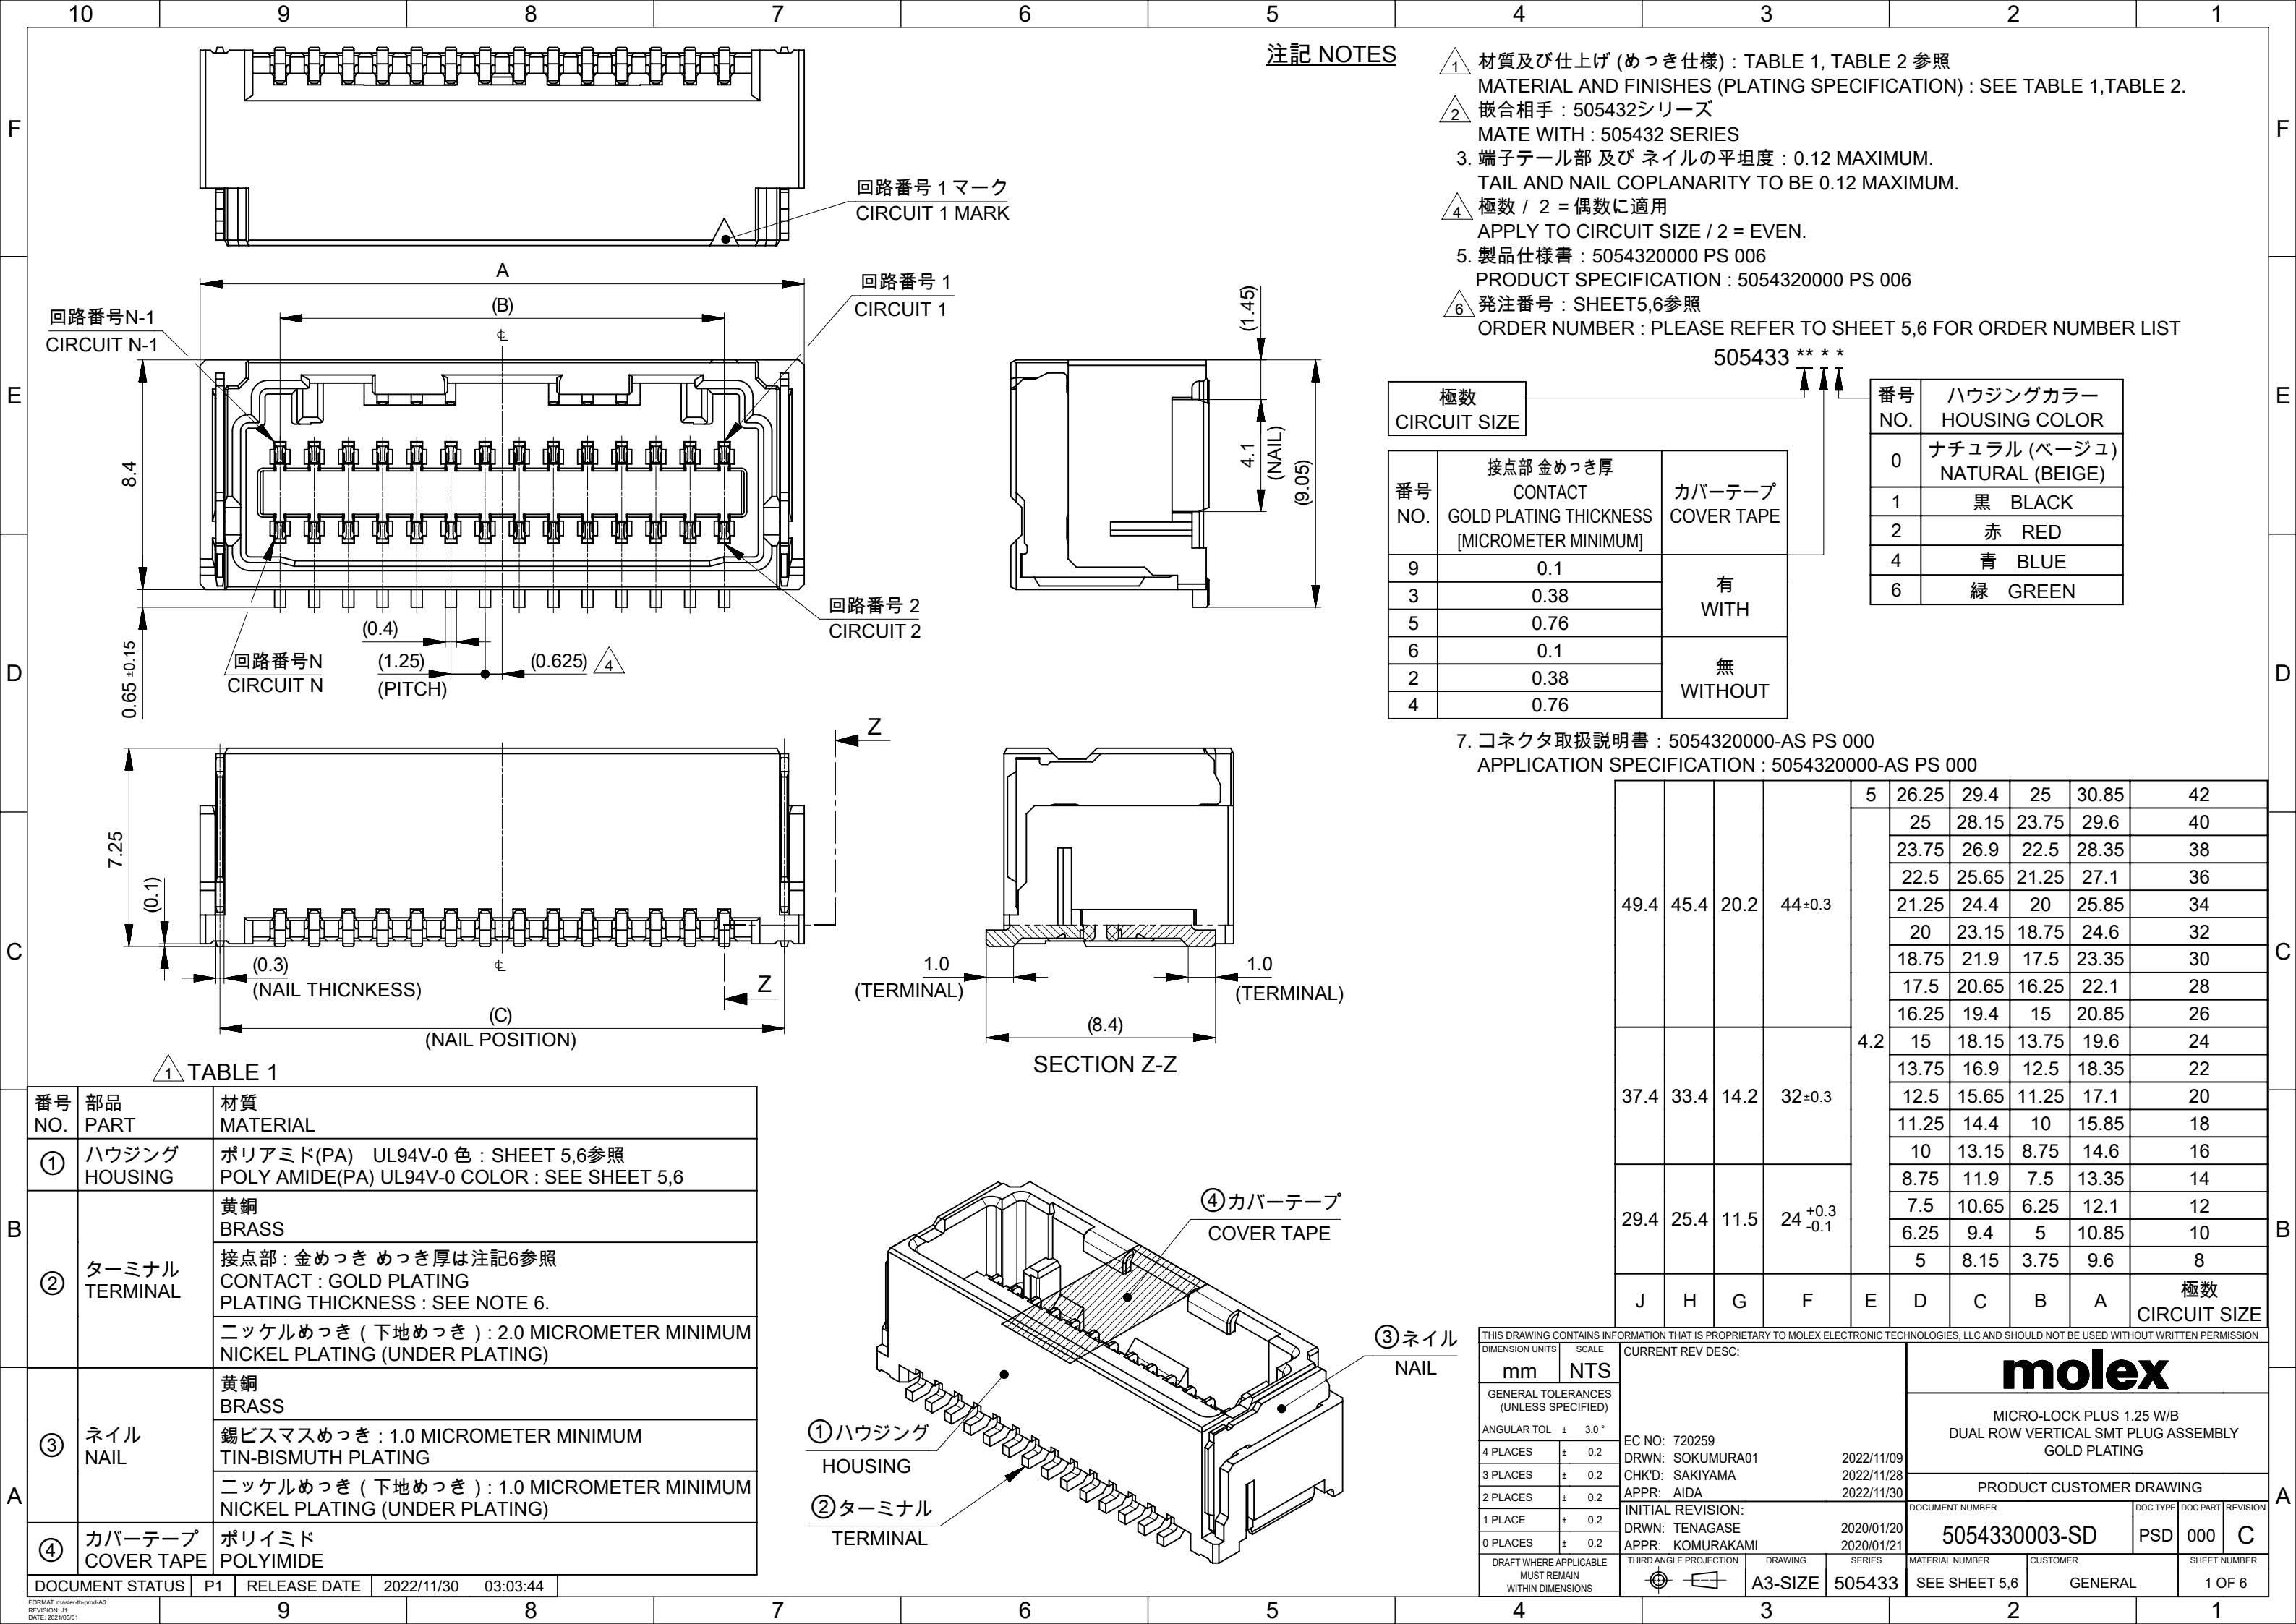


製品形状
PRODUCT SHAPE




8-14極
8-14 CIRCUIT

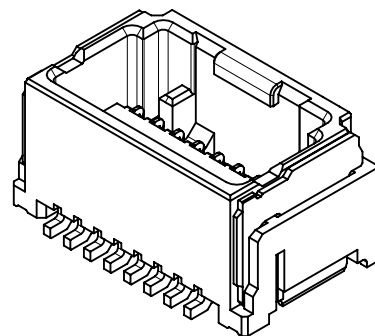


16-24極
16-24 CIRCUIT

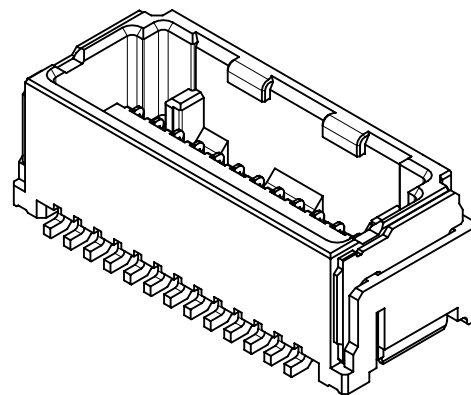


26-32極
26-32 CIRCUIT

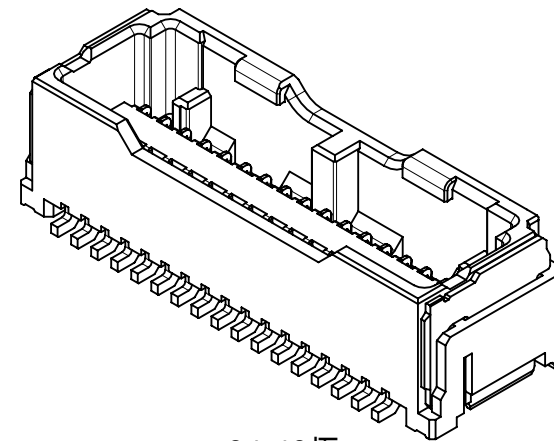

34-40極
34-40 CIRCUIT

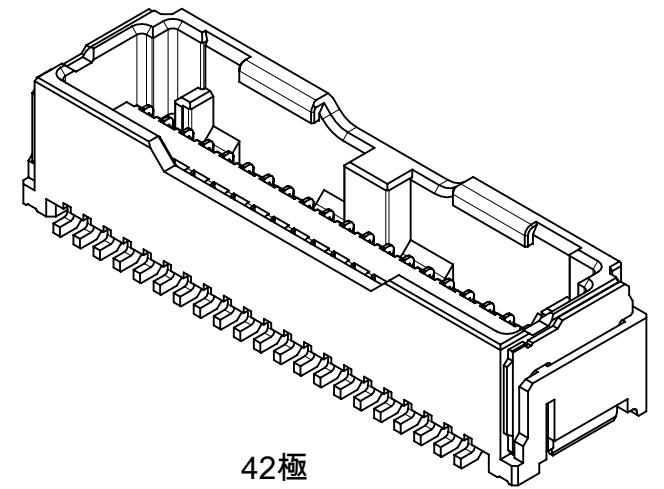

42極
42 CIRCUIT

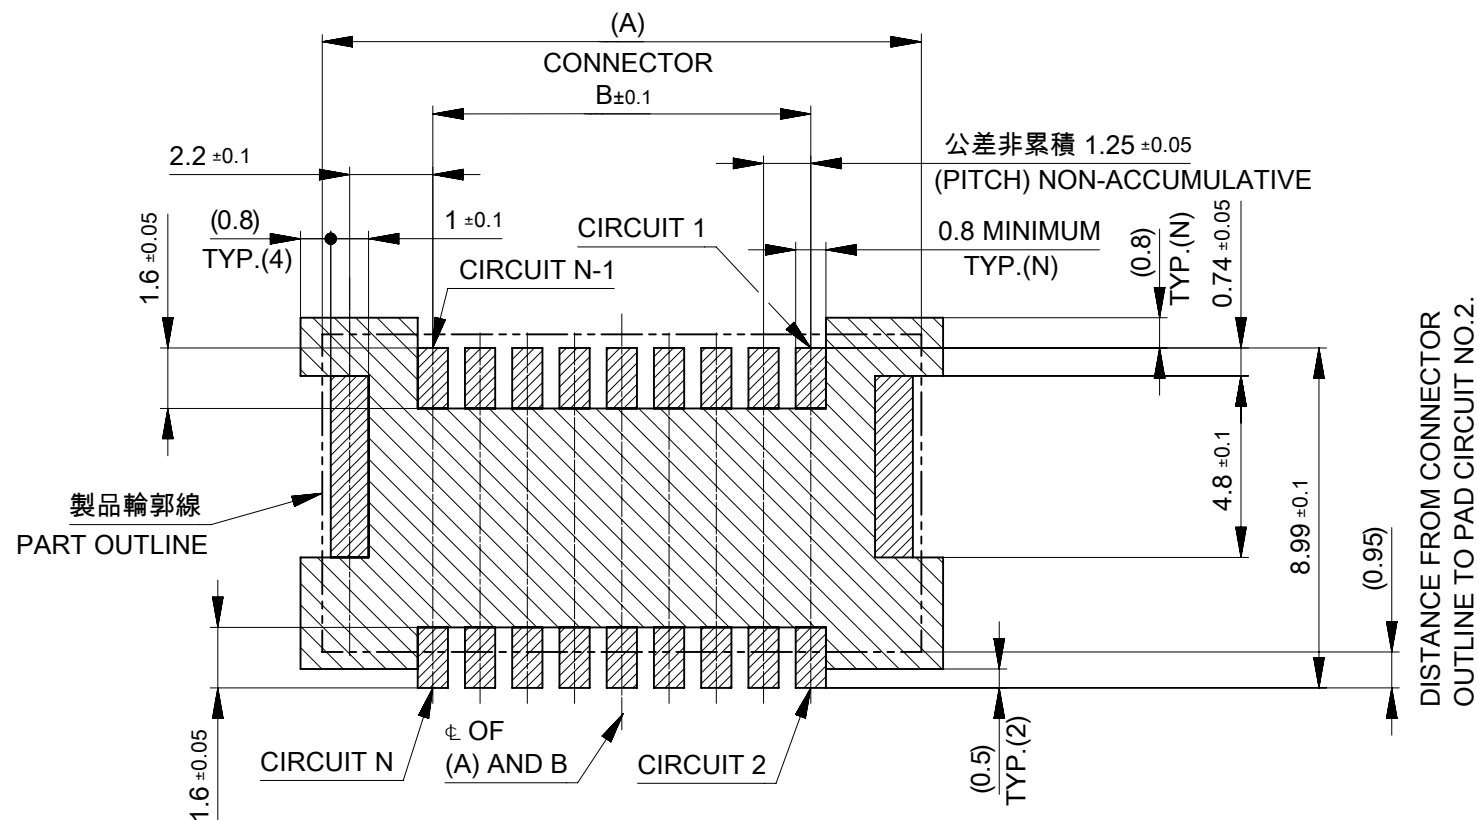



基板パターンレイアウト (参考)
(参考 : 基板厚 1.6mm, メタルマスク厚さ 0.15mm, マスク開口率 100%)

RECOMMEND PCB LAYOUT : COMPONENT SIDE
(REFERENCE : PCB THICKNESS 1.6mm, STENCIL THICKNESS 0.15mm, APERTURE RATIO 100%)


パターン非推奨エリア
パターンを引き回す際は、製品機能に影響がないことをご確認ください。
PATTERN IS NOT RECOMMENDED ON THE HATCHING AREA
PLEASE CHECK NOT TO HAVE PROBLEM FOR PRODUCT FUNCTION
WHEN SETTING PATTERN ON THE HATCHING AREA.


嵌合状態図
MATED CONNECTORS

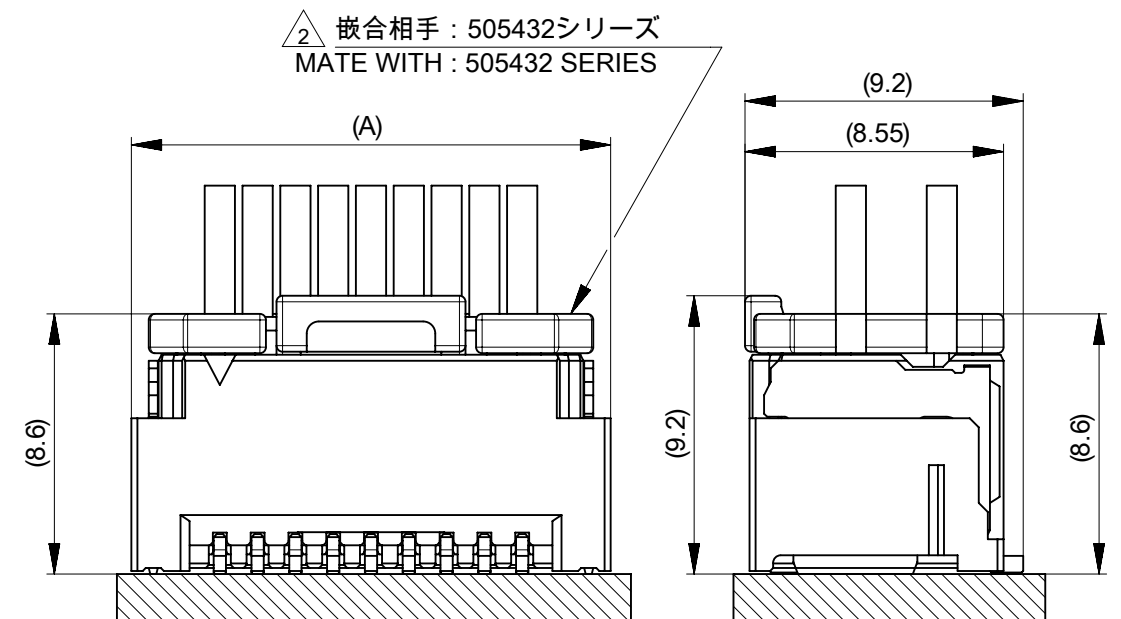

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
DIMENSION UNITS		SCALE	CURRENT REV DESC:				molex MICRO-LOCK PLUS 1.25 W/B DUAL ROW VERTICAL SMT PLUG ASSEMBLY GOLD PLATING			
mm		NTS								
GENERAL TOLERANCES (UNLESS SPECIFIED)										
ANGULAR TOL ± 3.0 °		EC NO: 720259								
4 PLACES ± 0.2		DRWN: SOKUMURA01		2022/11/09						
3 PLACES ± 0.2		CHK'D: SAKIYAMA		2022/11/28						
2 PLACES ± 0.2		APPR: AIDA		2022/11/30		PRODUCT CUSTOMER DRAWING				
1 PLACE ± 0.2		INITIAL REVISION:				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
0 PLACES ± 0.2		DRWN: TENAGASE		2020/01/20		5054330003-SD		PSD	000	C
APPR: KOMURAKAMI		2020/01/21								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
				A3-SIZE	505433	SEE SHEET 5,6		GENERAL		2 OF 6


DOCUMENT STATUS	P1	RELEASE DATE	2022/11/30	03:03:44
-----------------	----	--------------	------------	----------

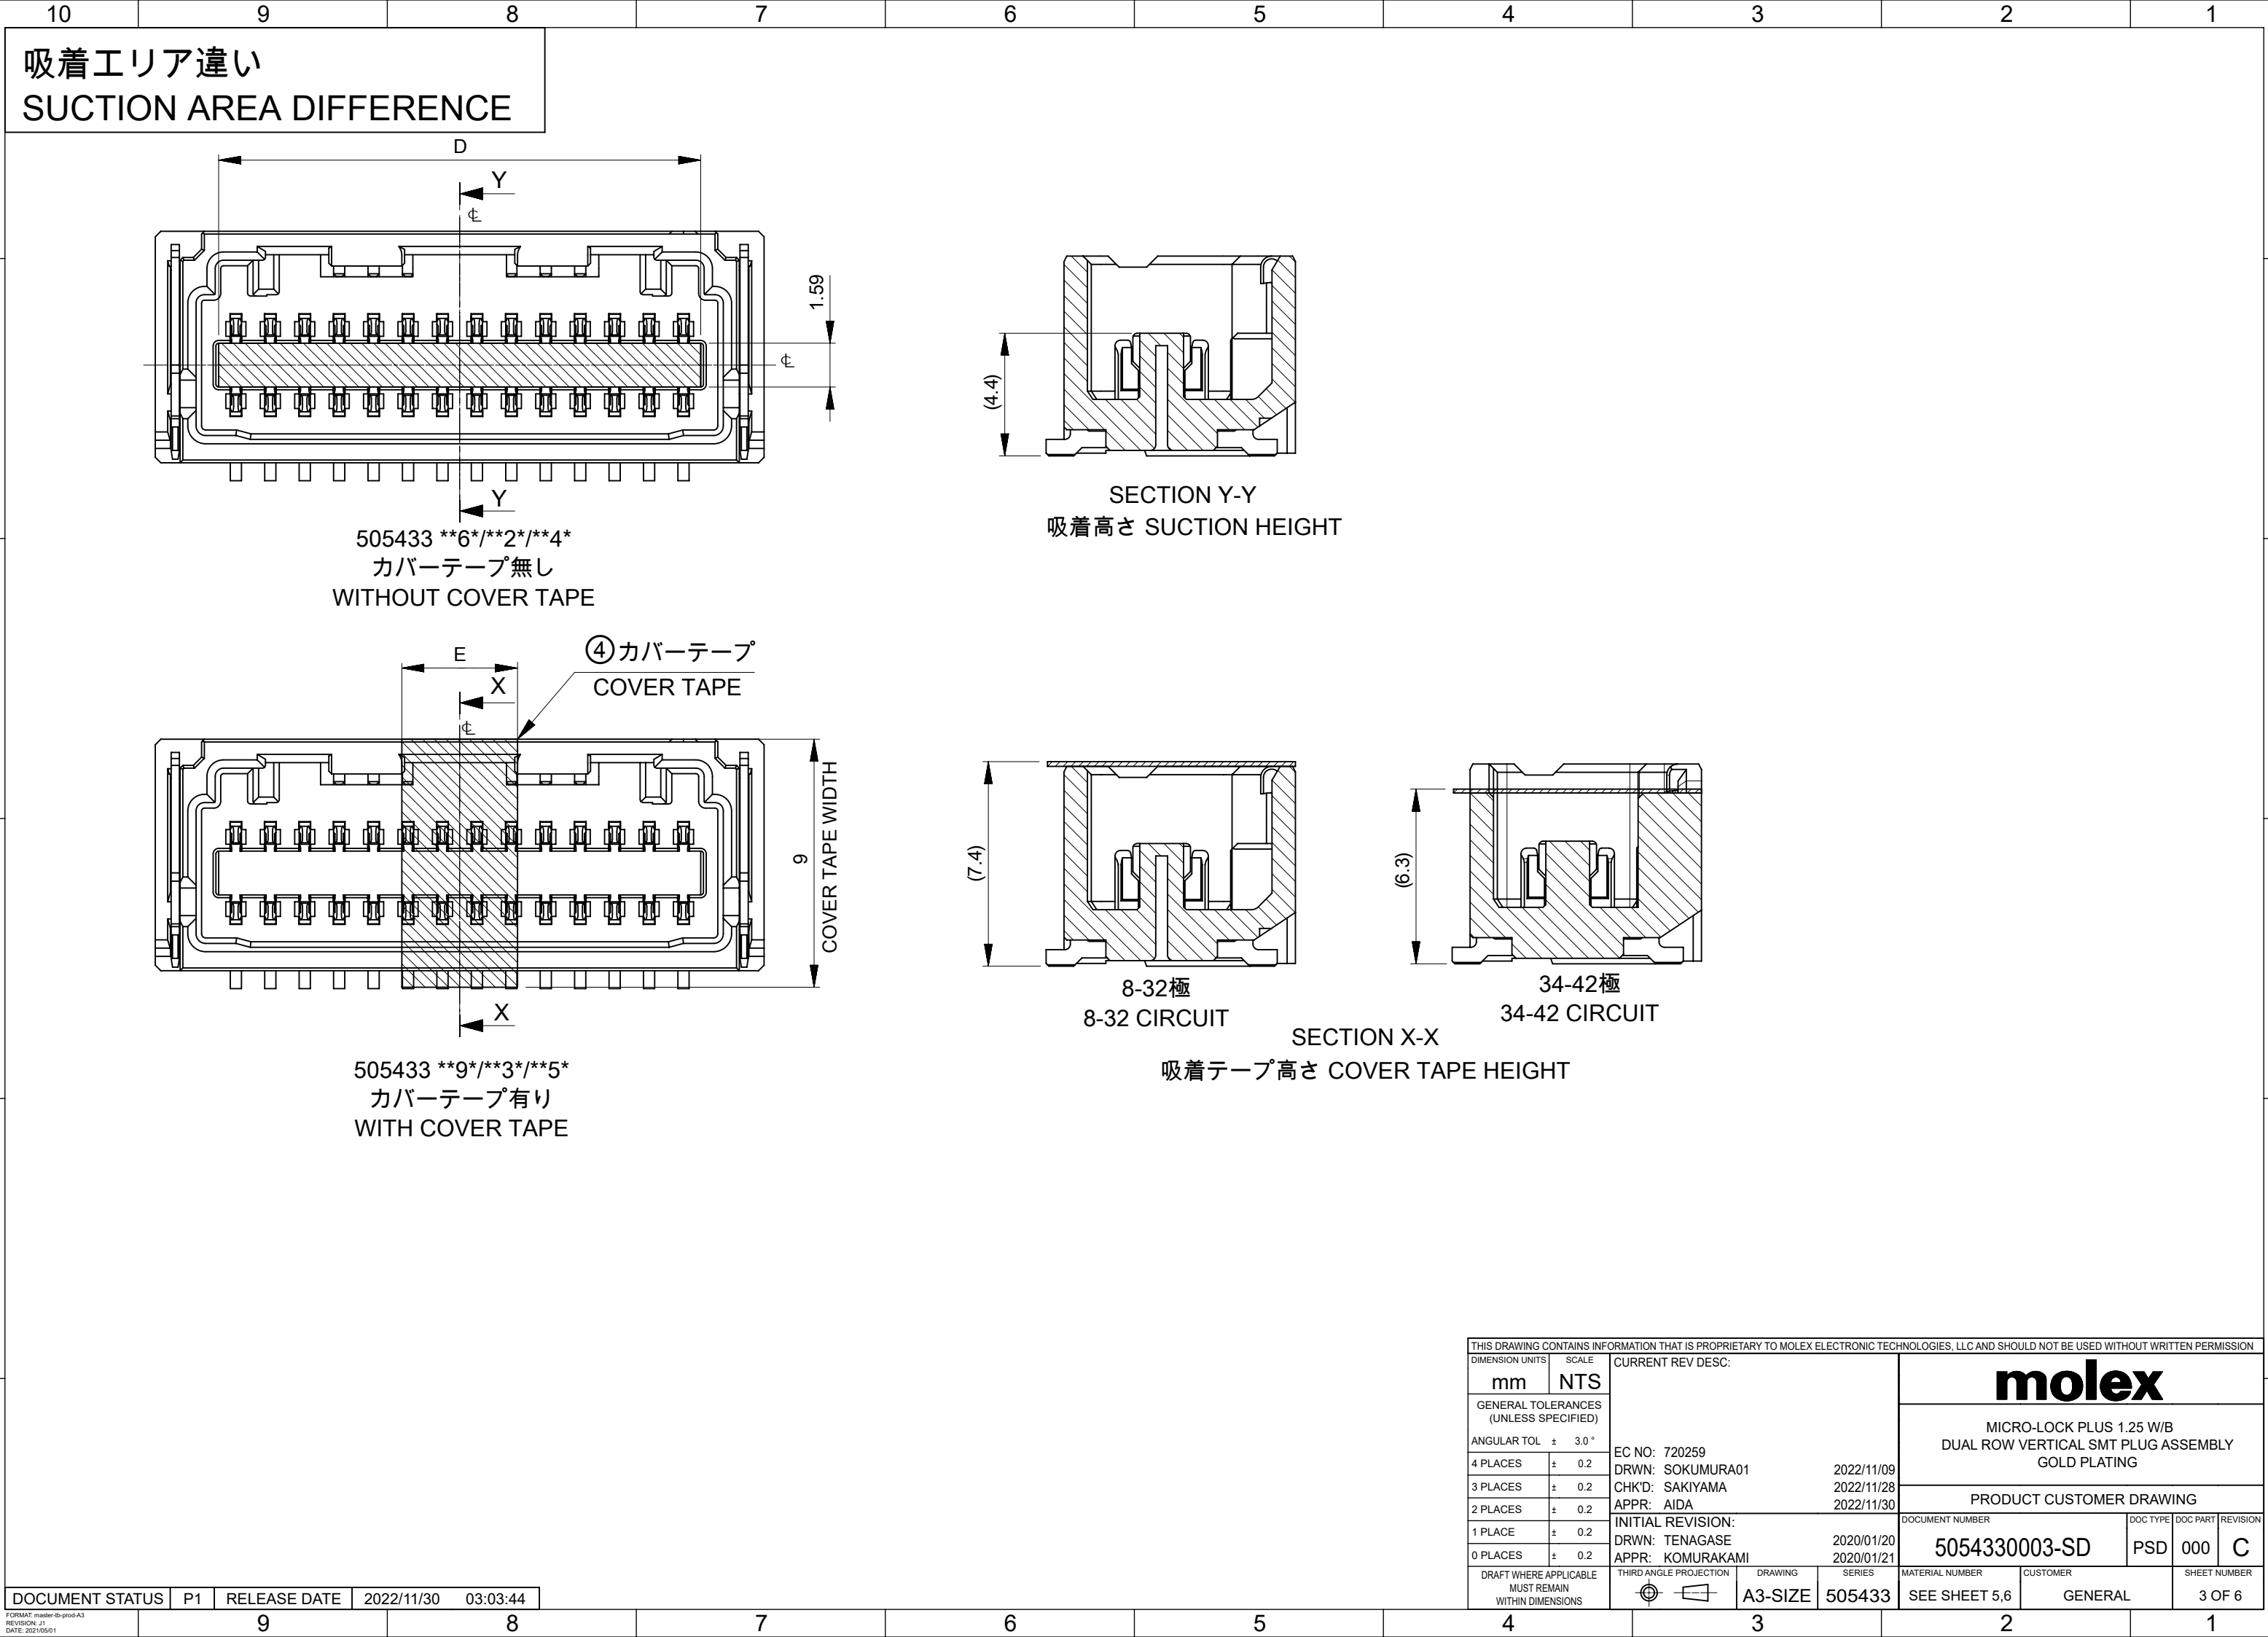

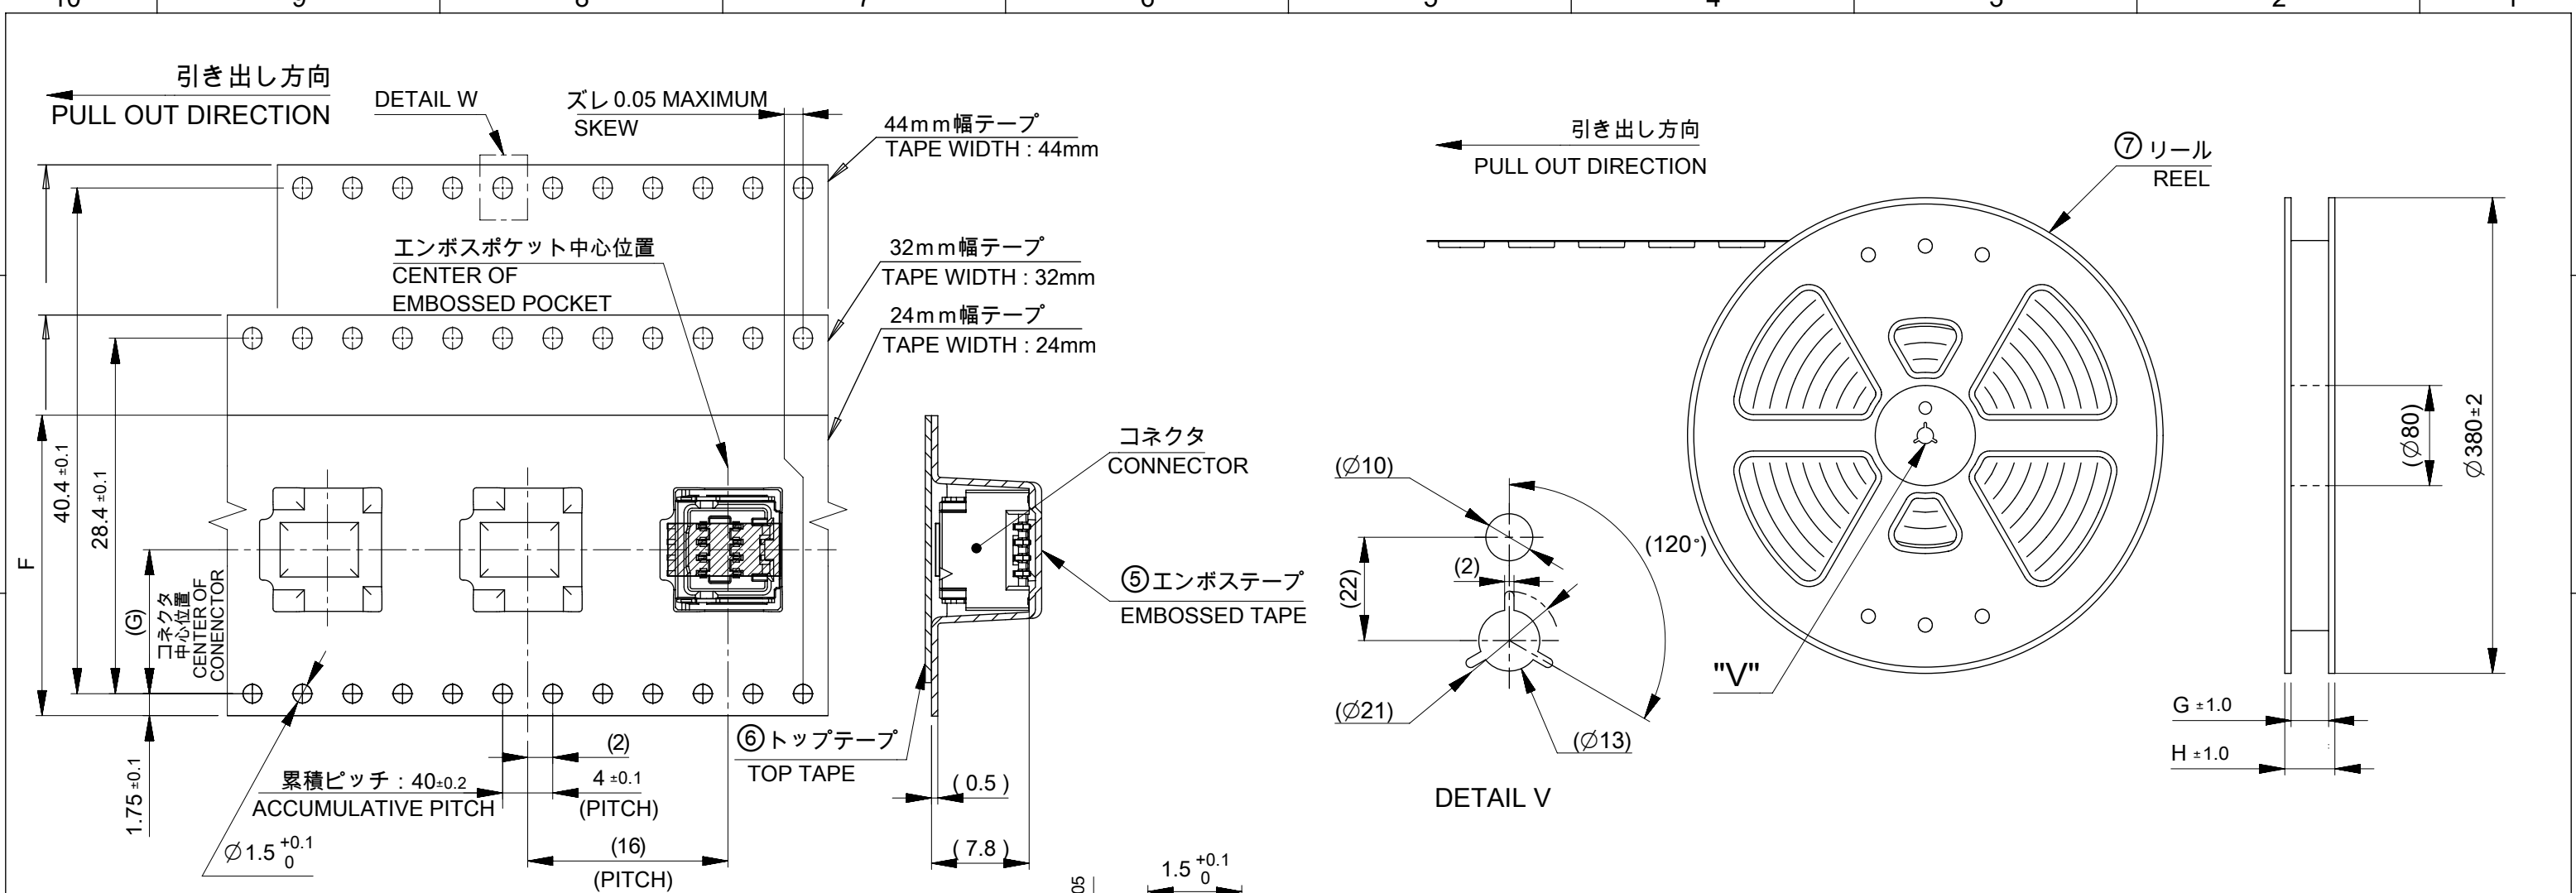

NOTES

8. 梱包数量 : 500個
NUMBER OF CONNECTORS : 500 PIECES/REEL.
9. 梱包仕様書 : 5054339200 PS 200
PACKING SPECIFICATION : 5054339200 PS 200
10. リードテープ長さ
LEAD TAPE LENGTH

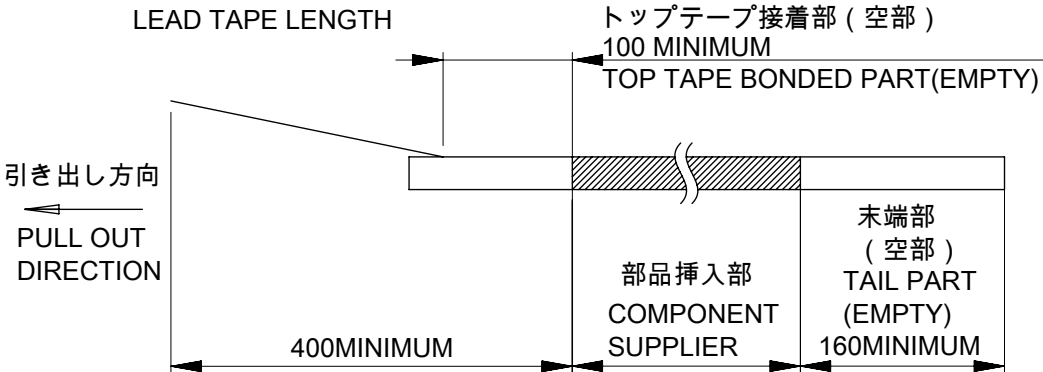

11. トップテープの剥離強度については、IEC60286-3に準拠
TOP TAPE PEEL FORCE IS DEFINED BY IEC 60286-3.

TABLE 2

番号 NO.	部品 PART	材質 MATERIAL
⑤	エンボステープ EMBOSSSED TAPE	ポリスチレン(PS) POLYSTYRENE(PS)
⑥	トップテープ TOP TAPE	ポリエチレン(PE)、その他 POLYETHYLENE(PE), OTHER
⑦	リール REEL	ポリスチレン(PS) <リサイクル材を含む> POLYSTYRENE(PS) <RECYCLE MATERIAL CONTAINED >

DOCUMENT STATUS	P1	RELEASE DATE	2022/11/30	03:03:44
-----------------	----	--------------	------------	----------

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex				
mm		NTS									
GENERAL TOLERANCES (UNLESS SPECIFIED)				MICRO-LOCK PLUS 1.25 W/B DUAL ROW VERTICAL SMT PLUG ASSEMBLY GOLD PLATING							
ANGULAR TOL ± 3.0 °											
4 PLACES		± 0.2		EC NO: 720259			PRODUCT CUSTOMER DRAWING				
3 PLACES		± 0.2		DRWN: SOKUMURA01 2022/11/09							
2 PLACES		± 0.2		CHK'D: SAKIYAMA 2022/11/28							
1 PLACE		± 0.2		APPR: AIDA 2022/11/30			DOCUMENT NUMBER 5054330003-SD				
0 PLACES		± 0.2		INITIAL REVISION: DRWN: TENAGASE 2020/01/20 APPR: KOMURAKAMI 2020/01/21						DOC TYPE PSD	DOC PART 000
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION 		DRAWING A3-SIZE	SERIES 505433	MATERIAL NUMBER SEE SHEET 5,6		CUSTOMER GENERAL	SHEET NUMBER 4 OF 6

