




Connectors > D-Shaped Connectors > D-Sub Connectors > PCB D-Sub Connectors >

D-Sub Plug Assembly: Standard, Right Angle, Shell Size 1, 2.74mm

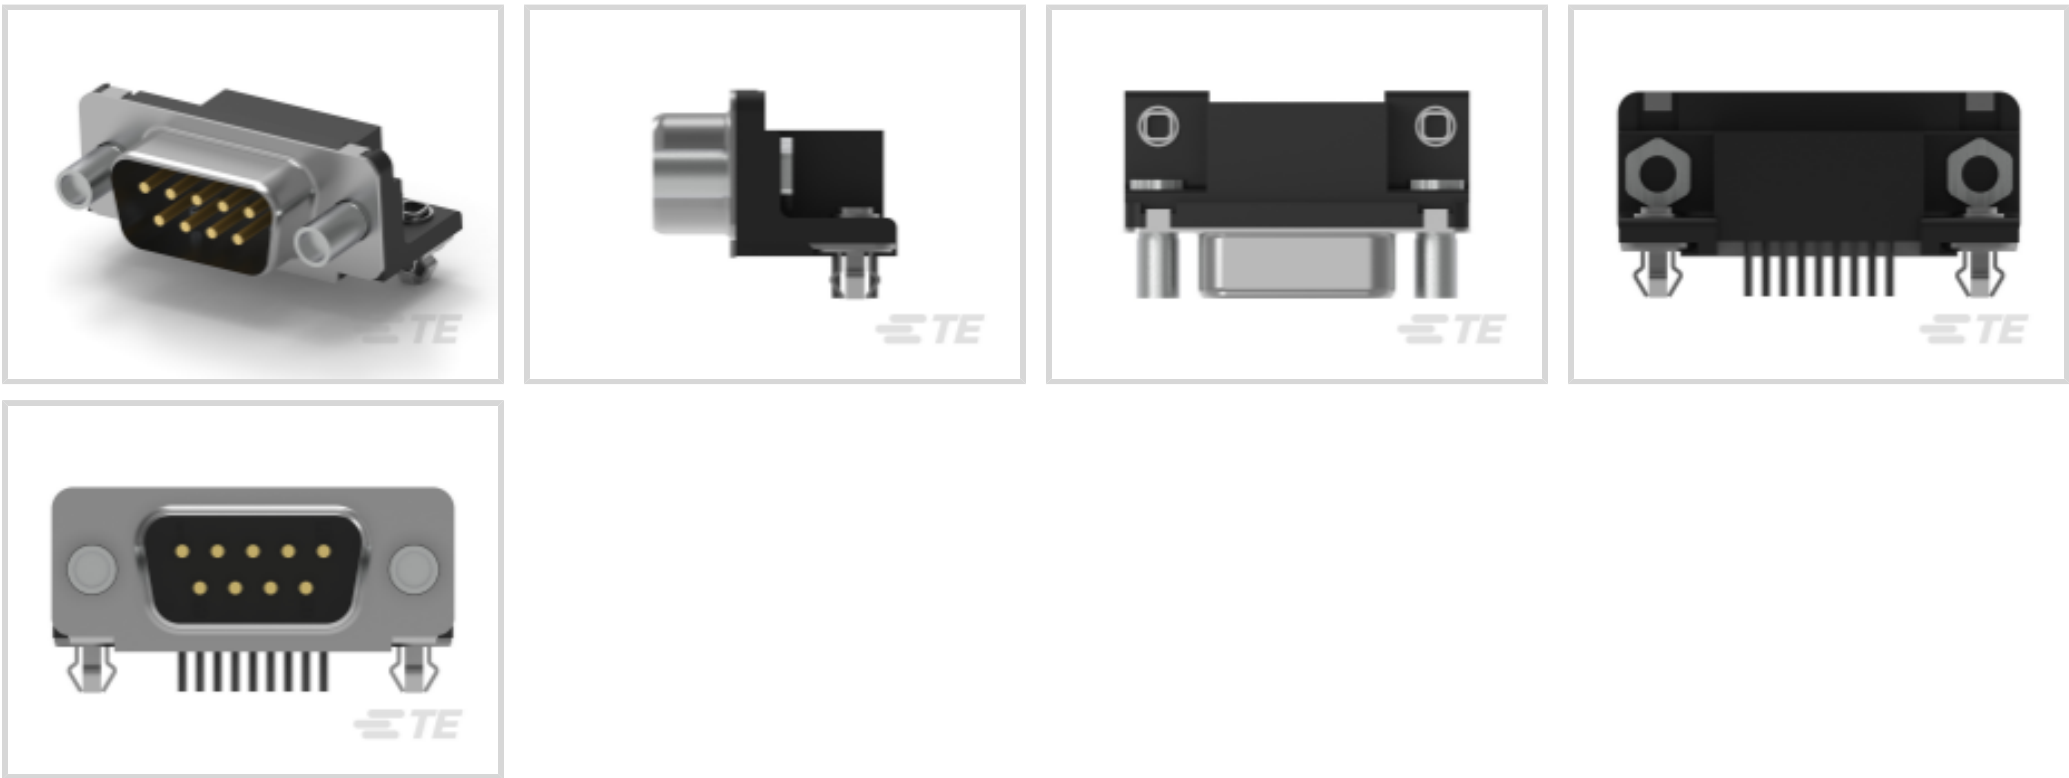

Connector & Housing Type: **Plug**

Connector System: **Board-to-Board**

Number of Positions: **9**

Centerline (Pitch): **2.74 mm [.108 in]**

Number of Rows: **2**

[All D-Sub Plug Assembly: Standard, Right Angle, Shell Size 1, 2.74mm \(53\)](#)

Features

Contact Features

	30 µin
Contact Shape & Form	Round
Contact Current Rating (Max)	6 A
Contact Underplating Material	Palladium Nickel
Contact Options	Installed
Contact Mating Area Plating Material	Gold Flash, Gold
Contact Base Material	Brass
PCB Contact Termination Area Plating Material	Tin-Lead

Product Type Features

Connector & Housing Type	Plug
Connector System	Board-to-Board
Connector Shell Size	1



Connector & Contact Terminates To	Printed Circuit Board
Ground Feature Type	Grounding Indents, Grounding Straps
Shell Material Configuration	Front Metal Shell

Configuration Features

Number of Positions	9
Number of Rows	2
PCB Mount Orientation	Right Angle

Housing Features

Centerline (Pitch)	2.74 mm[.108 in]
Housing Material	Nylon GF, Polyester GF
Shell Material	Steel

Dimensions

Row-to-Row Spacing	2.84 mm[.112 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]

Body Features

Connector Profile	Standard
Assembly Process Feature Material	Copper Alloy
Shell Plating Material	Tin
Mating Feature Material	Zinc
Mating Feature Plating Material	Clear Chromate
Primary Product Color	Black

Mechanical Attachment

PCB Mount Retention	With
PCB Mount Retention Type	Boardlock
Mating Retention	With
Mating Retention Type	Female Screwlocks, Fixed
Connector Mounting Type	Board Mount
Mounting Feature Plating Material	Tin over Copper Flash
Mounting Feature Material	Brass
Mounting Hole Diameter	3.18 mm[.125 in]
Assembly Process Feature Plating Material	Tin over Nickel

Operation/Application

--



Circuit Application	Signal
---------------------	--------

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Other

EU RoHS Compliance	Not Compliant
EU ELV Compliance	Compliant with Exemptions

Termination Features

Termination Post & Tail Diameter	.66 mm[.026 in]
Termination Method to PCB	Through Hole - Solder
Termination Post & Tail Length	3.18 mm[.125 in]

Industry Standards

UL Flammability Rating	UL 94V-0
Compatible With Approved Standards Products	UL E28476

Packaging Features

Packaging Quantity	130
Packaging Method	Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Pb (13% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # CAT-AM7-248H6
IDC D-Sub: Receptacle Kit, Wire to Wire, Signal, 2.74 mm

TE Part # CAT-AM7-253
IDC D-Sub: Receptacle Assembly, Low Profile, Signal, 2.77 mm

TE Part # CAT-AM7-248H8
IDC D-Sub: Receptacle Assembly, Wire to Wire, Signal, 2.74 mm

TE Part # 747516-7
09 HDE PMOLD RCPT, LEAD FREE

TE Part # 3-1393483-8
V42254A1115B209=SUB D FEDERLEI

Customers Also Bought

TE Part #3-106506-2
D-Sub Receptacle Assembly: Right Angle, Shell Size 2, 2.74mm

TE Part #5745438-4
09 RCPT RA/MS 454

TE Part #1393845-5
RP821024

TE Part #185879-1
26W MQS COVER ASSY YELLOW





TE Part #5-1625892-7
[3W SM M/OX 5% 51K](#)



TE Part #8-2176412-4
[5W XSM M/OX 5% 15K](#)



TE Part #185875-1
[26POS MQS REC](#)



TE Part #5-146277-2
[02 MODII HDR SRST B/A .100CL](#)



TE Part #1393774-8
[V23026A1002B201](#)

Documents

Product Drawings

[9P RA MSFL 318 PLUG](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_7-747840-1_AC.2d_dxf.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_7-747840-1_AC.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_7-747840-1_AC.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL Report](#)

English