


QUICK REFERENCE GUIDE

AMPLIMITE .050 SERIES D-SUBMINIATURE CONNECTORS

(.050 x .100 [1.27 x 2.54] Centerline) Series III

We offer one of the broadest and most versatile portfolios of D-subminiature connectors in the market to address our customers' design needs. Our reliable AMPLIMITE .050 series D-subminiature connector portfolio offers a high density D-type interface and includes right angle and vertical options. Both versions have three mating faces available; flat face, latch block and latch block with rails. Plug and receptacle positions include 20, 26, 28, 40, 50, 68, 80, 100 and 120 (ACTION PIN only).

AMPLIMITE .050 Series connectors utilize gold plated tab and tuning fork contacts on a compact .050 x .100 grid spacing and are available with 20 to 100 positions. The AMPLIMITE .050 series cable connectors terminate to wire via the insulation displacement contact (IDC) termination method, which provides fast, reliable and economical termination of discrete wire or ribbon cable. Both solder, and compliant pin terminations are offered on the printer circuit board versions. All connectors are produced with metal shell construction, which provides EMI/ RFI shielding capability and high durability.

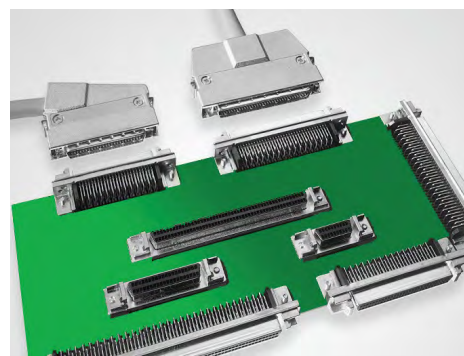

FEATURES

- High density D type interface
- 20 through 100 contact positions
- Excellent EMI/RFI protection
- Protect your system with shields that mate before contacts, with ground mating first and breaking last
- Squeeze-to-release latches or jackscrew hardware available to fit your needs
- Board connectors compatible with standard thru-hole flow solder and surface-mount reflow solder processes
- Recognized under the Component Program of Underwriters Laboratories Inc., file E28476
- Listed and complies with UL 1863, Communication Circuit Accessories File No. E81956
- Certified by Canadian Standards Association, File No. 1088108

APPLICATIONS

- Computers and peripherals
- Industrial machinery
- Medical instrumentation
- RAID storage arrays
- File servers/routers
- Tape storage systems
- Workstations
- On-machine industrial communications
- Personal and handheld devices

HOW TO SELECT AN AMPLIMITE CONNECTOR PART NUMBER

The charts on the following pages highlight the AMPLIMITE part numbers with the key product attributes to help identify the correct part for your application. Each section also includes a list of materials to characterize the composition of each part.

AMPLIMITE .050 SERIES RIGHT ANGLE RECEPTACLES


MATERIALS

Housing: Thermoplastic, 94V-0 rated, black. SMT compatible


Shell: Steel, plated bright nickel over copper

Bracket: Zinc, plated nickel over copper


Contacts: .000030[.00076]min gold plating or Gold flash over Palladium Nickel plate .000030[0.00076] min total on mating end, Phosphor bronze, duplex plated .000030 [0.00076] min. gold on mating end, tin on solder end, all underplated nickel

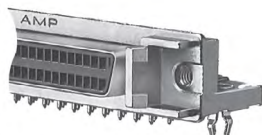

Right Angle Receptacle—Rails,
Latchblocks, Boardlocks



Right Angle Receptacle—
Latchblocks, Boardlocks

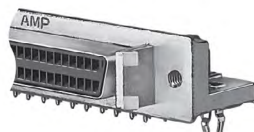

Right Angle Receptacle
Boardlocks

# of Positions	Part #	With Rails	With Latchblocks	With Boardlocks	Solder Tail Length
40	1761028-2	x	x	x	.100 [2.54]
40	5787082-3	-	x	x	.100 [2.54]
40	5787170-4	-	-	x	.100 [2.54]
50	5787190-5	x	x	-	.100 [2.54]
50	1761028-3	x	x	x	.100 [2.54]
50	5787394-5	-	x	-	.100 [2.54]
50	5787082-5	-	x	x	.100 [2.54]
50	5787170-5	-	-	x	.100 [2.54]
50	5787362-5	-	-	x	.120 [3.05]
50	5787266-5	x	x	x	.100 [2.54]
50	5787395-5	-	x	x	.100 [2.54]
68	5787190-7	x	x	-	.100 [2.54]
68	1761028-4	x	x	x	.100 [2.54]
68	5787394-7	-	x	-	.100 [2.54]
68	5787082-7	-	x	x	.100 [2.54]
68	5787169-7	-	-	-	.100 [2.54]
68	5787170-7	-	-	x	.100 [2.54]
68	5787362-7	-	-	x	.120 [3.05]
100	5787082-9	-	x	x	.100 [2.54]
100	5787169-9	-	-	-	.100 [2.54]
100	5787170-9	-	-	x	.100 [2.54]
100	5787362-9	-	-	x	.120 [3.05]

AMPLIMITE .050 SERIES VERTICAL RECEPTACLES

Vertical Receptacle Headers With Through Hole Tails

# of Positions	Part #	With Rails	With Latchblocks	With Boardlocks
20	5749069-1	x	x	-
26	5749069-2	x	x	-
28	5749721-3	-	x	-
50	5749069-5	x	x	-
50	5749721-5	-	x	-
50	5749070-5	-	-	-
68	5749069-7	x	x	-
68	5749721-7	-	x	-
68	5749070-7	-	-	-
80	5749069-8	x	x	-
100	5749069-9	x	x	-
100	5749070-9	-	-	-

MATERIALS

Housing: Thermoplastic, 94V-0 rated, black. SMT compatible


Shell: Steel, plated bright nickel over copper

Bracket: Zinc, plated nickel over copper

Contacts: .000030[.00076]min gold plating or Gold flash over Palladium Nickel plate .000030[0.00076] min total on mating end, Phosphor bronze, duplex plated .000030 [0.00076] min. gold on mating end, tin on solder end, all underplated nickel



Vertical Receptacle With Rails/Latchblocks: 749069-5



Vertical Receptacle With Latchblocks: 749721-5

Vertical Receptacle Headers, with Action Pin Tails

# of Positions	Part #	With Rails	With Latchblocks	With Boardlocks
20	5786554-1	x	x	-
26	5786554-2	x	x	-
50	5786554-5	x	x	-
50	5786155-5	-	x	-
50	5786555-5	-	-	-
50	5786556-5	x	x	-
68	5786554-7	x	x	-
68	5786155-7	-	x	-
68	5786555-7	-	-	-
68	786155-7	-	x	-
68	5786557-7	-	-	-
100	5786554-9	x	x	-
100	5786555-9	-	-	-

MATERIALS

Housing: Thermoplastic, 94V-0 rated, black. SMT compatible

Shell: Carbon steel, plated bright tin over copper

Bracket: Zinc, plated nickel over copper

Contacts: .000030[.00076]min gold plating or Gold flash over Palladium Nickel plate .000030[0.00076] min total on mating end, Phosphor bronze, duplex plated .000030 [0.00076] min. gold on mating end, tin on solder end, all underplated nickel



Vertical Receptacle Without Rails or Latchblocks: 49070-7

CABLE PLUG CONNECTORS - CONNECTOR WITH UNASSEMBLED WIRE LACING TERMINATION COVERS

MATERIALS

Housings and covers: Thermoplastic, 94V-0 rated, black or gray

Contacts: .000030[.00076]min gold plating or Gold flash over Palladium Nickel plate .000030[0.00076] min total on mating end, gold on mating end, Phosphor bronze, duplex plated .000030 [0.00076] min. tin on termination end, all underplated nickel

Shell: Steel, plated Bright tin alloy over nickel min. copper

Recommended wire size: 28 AWG [0.08-0.09mm²] or 30 AWG [0.05mm²], solid or 7 strand, with a .029-.036 [0.74-0.89] insulation diameter



# of Positions	Part #	Outer Wire Diameter Black (.032-.036)	Outer Wire Diameter Gray (.029-.031)
26	5750913-2	x	-
26	1-5750913-2	-	x
50	5750913-5	x	-
50	1-5750913-5	-	x
68	5750913-7	x	-
68	1-5750913-7	-	x
100	1-5750913-9	-	x

1. Plug connector requires backshell kit for complete assembly. Please see "Backshell Kit" section of Quick Reference Guide for backshell kit part numbers.
2. For termination, cover closing and wire lacing tooling, please see "Tooling" section of Quick Reference Guide.

CABLE PLUG CONNECTORS - CONNECTOR WITH STANDARD TERMINATION COVERS


MATERIALS

Housings and covers: Thermoplastic, 94V-0 rated, black

Contacts: .000030[.00076]min gold plating or Gold flash over Palladium Nickel plate .000030[0.00076] min total on mating end, Phosphor bronze, duplex plated .000030 [0.00076] min. gold on mating end, tin on termination end, all underplated nickel

Shell: Steel, plated Bright tin alloy over nickel over copper

Recommended wire size: 28 AWG[0.08-0.09mm²] or 30 AWG [0.05mm²], solid or 7 strand, with a .029-.036 [0.74-0.89] insulation diameter

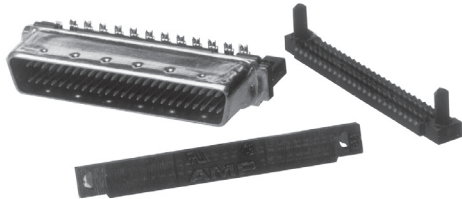

# of Positions	Part #	With Rails	With Latchblocks
20	5749111-1	x	x
20	5749621-1	-	x
26	1-5749111-0	x	x
26	5749621-2	-	x
28	5749621-3	-	x
40	5749111-3	x	x
40	5749621-4	-	x
50	5749111-4	x	x
50	5749621-5	-	x
68	5749111-6	x	x
68	5749621-7	-	x
80	5749111-7	x	x
80	5749621-8	-	x
100	5749111-8	x	x
100	5749621-9	-	x

1. Plug connector requires backshell kit for complete assembly and must use round jacketed cable (discrete or laminated). Refer to "Backshell Kit" section of Quick Reference Guide for backshell kit part numbers.
2. For termination tooling, see "Tooling" section of Quick Reference Guide.

CABLE RECEPTACLE CONNECTORS - CONNECTORS WITH STANDARD TERMINATION COVERS

MATERIALS

Housings and covers: Thermoplastic, 94V-0 rated, black

Contacts: Phosphor bronze, duplex plated .000030 [0.00076] min. gold on mating end, tin on termination end, all underplated nickel

Shell: Steel, plated bright tin over copper

Recommended wire size: 28 AWG [0.08-0.09mm²] or 30 AWG [0.05mm²], solid or 7 strand, with a .029-.036 [0.74-0.89] insulation diameter



# of Positions	Part #	Assembled Covers	Unassembled Covers
68	5749699-7	-	x

1. Receptacle connector requires backshell kit for complete assembly. Refer to the "Backshell Kit" section of the Quick Reference Guide for backshell kit part numbers.
2. Termination, cover closing and wire lacing tool, see "tooling" section of the Quick Reference Guide.
3. For termination tooling, other than wire lacing, see "tooling" section of the Quick Reference Guide.
4. All part numbers are RoHS compliant.

BACKSHELL KITS

SHIELDED BACKSHELL KITS, WITH JACKSCREWS

# of Positions	Part #	Package	Male with #2-56 Threads	Female with #2-56 Threads
50	5749080-1	Individual	x	-
68	5786152-3	Individual	x	-
100	5749854-1	Individual	x	-
100	5749081-1	Individual	x	-

1. Each backshell kit includes upper and lower backshells, two male or female jackscrews, one strain relief staple and two or four #2-56 screws. All are packaged unassembled.

SHIELDED ENCLOSURE KITS, WITH MALE JACKSCREWS

# of Positions	Part #
68	5750752-1 (part number male 2-56 jackscrews)
68	5750752-2 (part number male 4-40 jackscrews)

1. Each enclosure kit contains two backshells, one boot, two jackscrews, one staple and two screws. All are packaged unassembled.
2. Meets SCSI-3 standards.

SHIELDED BACKSHELL KITS, WITH SPRING LATCHES

# of Positions	Part #	Package	Straight Exit with Latches	Angled Exit with Latches
20	5749190-1	Individual	x	-
20	5749199-1	Individual	-	x
26	5749609-1	Individual	-	x
26	749608-2	Individual	x	-
40	5749201-1	Individual	-	x
40	5749192-1	Individual	x	-
50	5749202-2	Individual	-	x
50	5749193-1	Individual	x	-
50	5749193-2	Individual	x	-
50	5749889-3	Bulk	x	-
68	5749204-1	Individual	-	x
68	5749195-2	Individual	x	-
68	5749204-2	Individual	-	x
80	5749205-1	Individual	-	x
80	749196-2	Individual	x	-
100	5749197-1	Individual	x	-
100	5749206-1	Individual	-	x

All parts are RoHS compliant

HARDWARE

HARDWARE

Overall Length	Threaded Length	Part #	Kits	Bulk
.562 [14.27]	.157 [3.99]	749087-1	x	-
.380 [9.65]	.157 [3.99]	749087-2	x	-
.562 [14.27]	.165 [4.19]	749087-4	x	-

Recommended for right-angle board mount connectors.

HARDWARE AND DUST COVERS


Thread Size	Part #
4-40	750644-1
2-56	786585-2

Recommended for pc board mount of panel mount connectors with latches or latches and rails. Permits cable connectors to be spring latch-type or jackscrew type.

FEMALE SCREWLOCK KIT

Part #	Packaging
750831-1	Individual Packed Kit (2 screwlocks per kit)

- 1. Minimum order is 510 kits.
- 2. All part numbers are RoHS compliant.

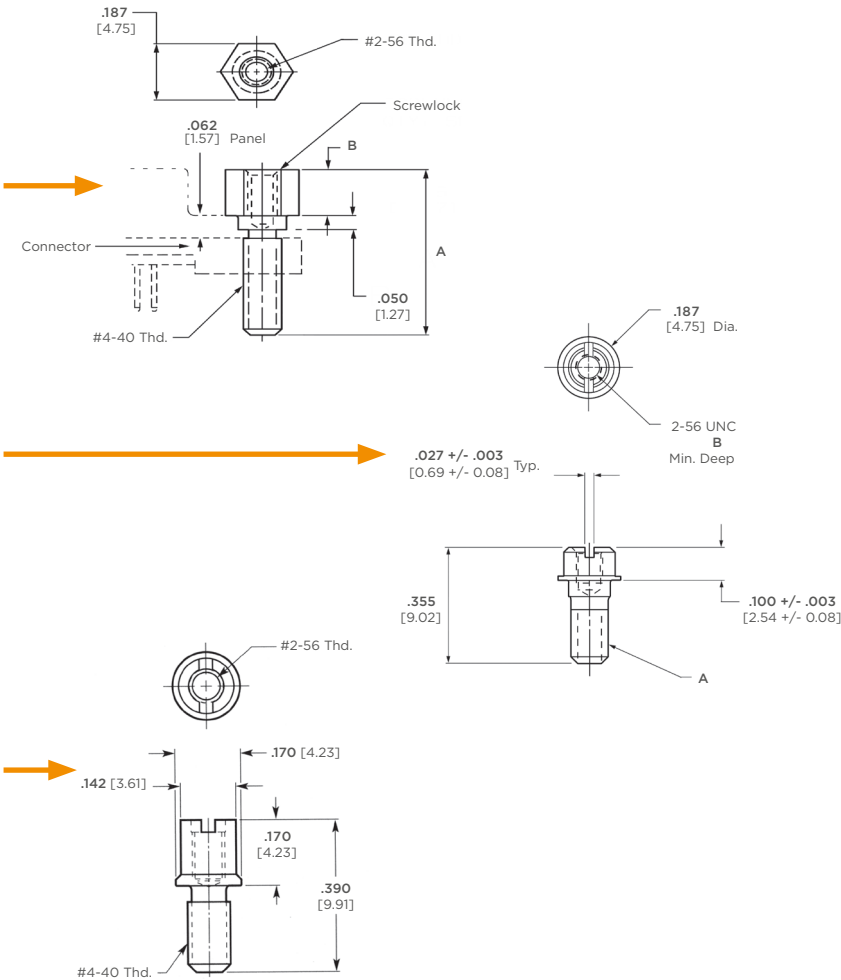

APPLICATION TOOLING

Cover Closing/Termination Tooling

Manual miniature applicator frame assembly—part number 91295-1.
This frame requires cover closing kit— part number 543508-1.

AMPLIMITE .050 Series Connector Application Tooling for Use with Wire Lacing Terminating Covers

Manual arbor frame assembly—part number 91293-1 (includes seating bars for 50 and 100 positions). See table 1 for seating bar part numbers.

Extra lacing stations available for use with lacing assembly—part number 91293-1 (order lower tooling assembly—part number 543481-1)

Table #1

# of Positions	Seating Bar Part #
26	543494-2
50	543494-1
68	543502-2



Arbor Frame Assembly



Miniature Applicator
Frame Assembly with
Cover Closing Kit

Additional Resources

AMPLIMATE Home Page

CLICK TO EXPLORE OUR COMPLETE LINE OF
AMPLIMATE D-SUBMINIATURE CONNECTORS



AMPLIMATE Cable Connector Accessories
Quick Reference Guide

CLICK TO DOWNLOAD THE DOCUMENT



AMPLIMATE Straight Posted Connectors
Quick Reference Guide

CLICK TO DOWNLOAD THE DOCUMENT



Amplimate D-Subminiature Stacked Pcb Connectors

CLICK TO DOWNLOAD THE DOCUMENT



AMPLIMATE Right Angle Posted Connectors
Quick Reference Guide

CLICK TO DOWNLOAD THE DOCUMENT



AMPLIMATE Accessory Parts

CLICK TO DOWNLOAD THE DOCUMENT



AMPLIMATE Cable Connectors and
Shielding Hardware Kits Quick Reference Guide

CLICK TO DOWNLOAD THE DOCUMENT



AMPLIMATE Virtual Sample Kit

CLICK TO DOWNLOAD THE DOCUMENT



Connect With Us

We make it easy to connect with our experts and are ready to provide all the support you need.

Visit te.com/support to chat with a Product Information Specialist.

TE Connectivity

Digital Data Networks

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements. These marketing materials do not constitute an offer or agreement of sale, and TE Connectivity shall be bound by and subject to only those terms and conditions set forth in a written agreement referencing specific products and signed by an authorized representative of TE.

©2026 TE Connectivity. All Rights Reserved.

03-26