

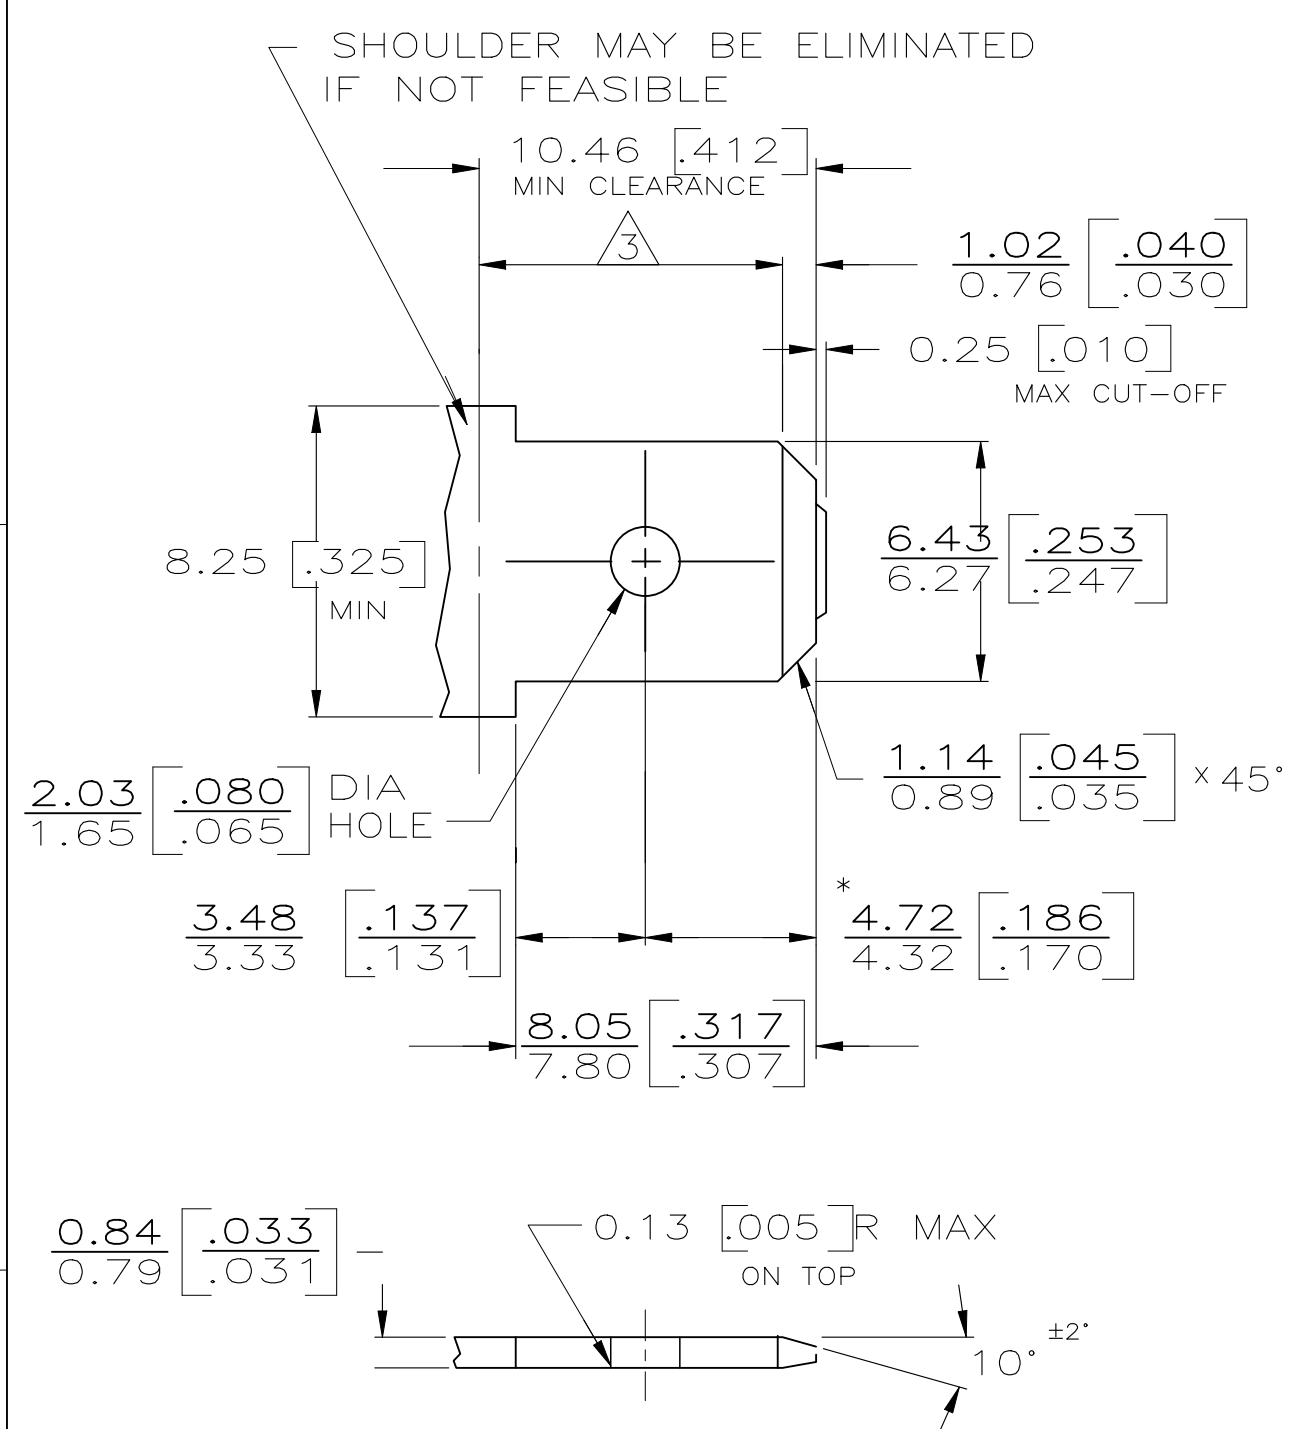
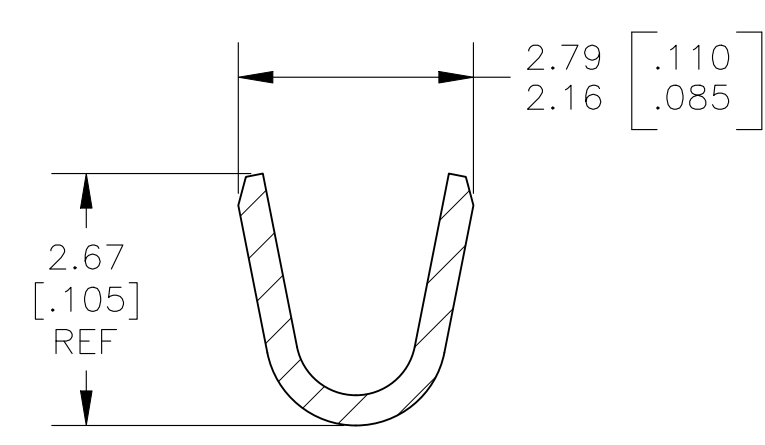


SUGGESTED MATING TAB

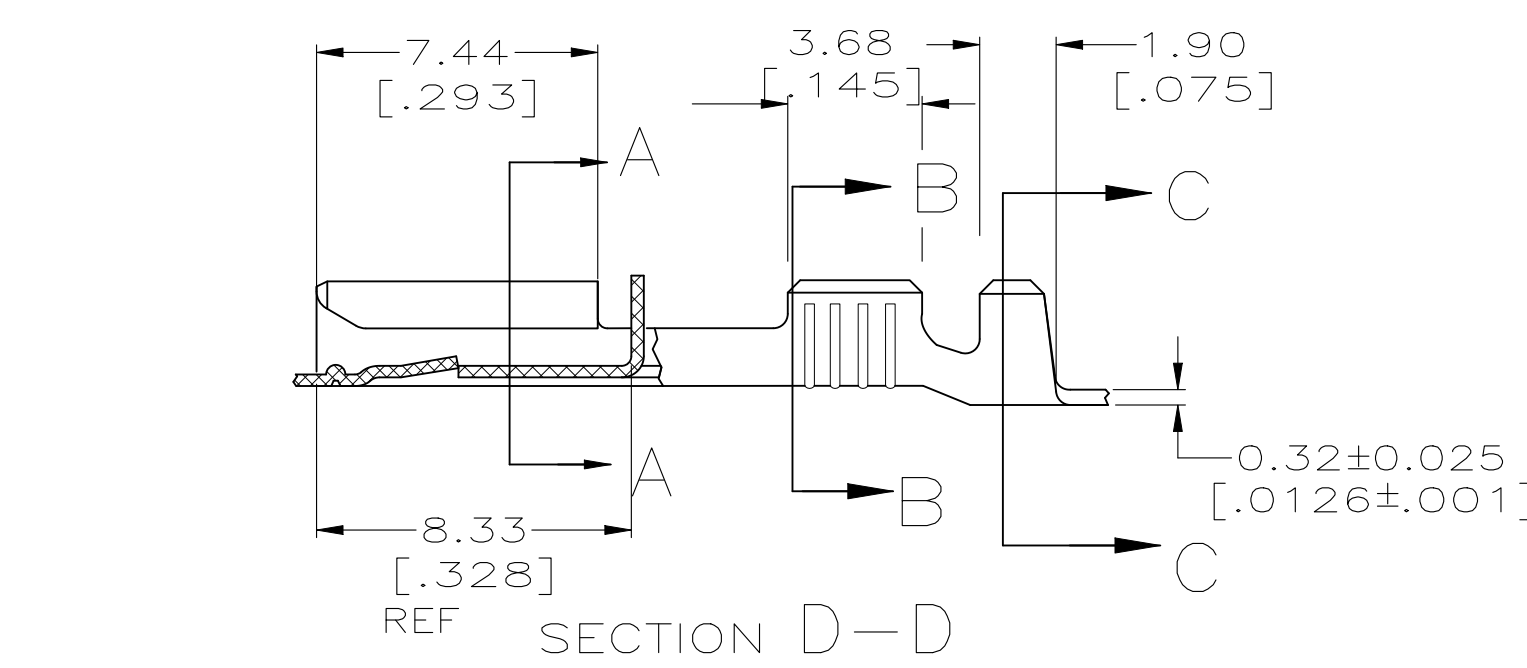



- 1 - MATL: 1/2H BRASS OR NICKEL PL STEEL.
 - 2 - NO BURRS PERMISSIBLE AT HOLE.
 - 3 - MUST BE FLAT WITHIN 0.076 [.003] OVER THIS LENGTH.
 - 4 - TIN PLATING IS REQUIRED ON BRASS WHEN TERMINAL TEMP. IS OVER 225°F.
 - 5 - HOLE MUST BE SYMMETRICAL ABOUT TAB Q WITHIN 0.076 [.003]
- * TO BE USED ONLY WHEN SHOULDER IS ELIMINATED.

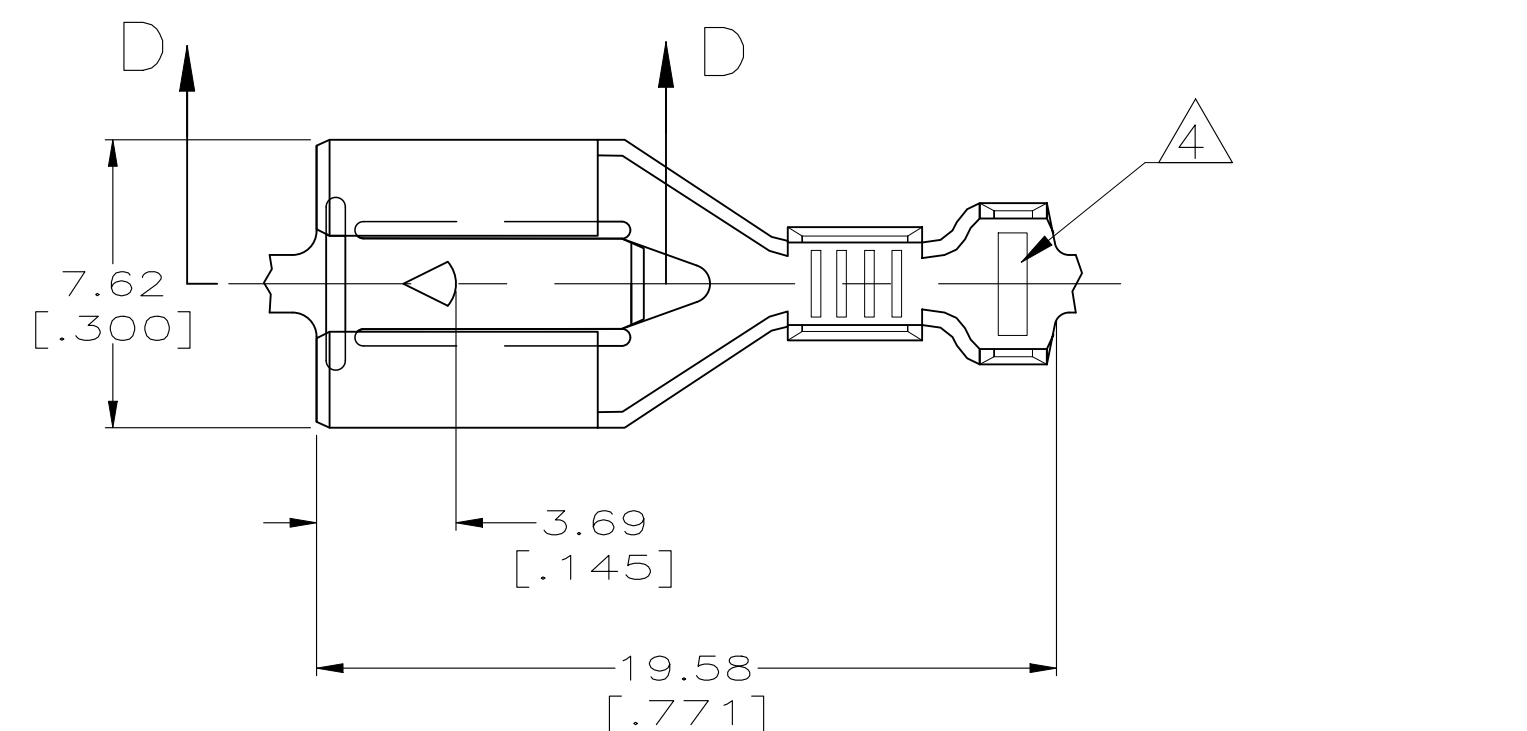

SECTION B-B
SCALE 10:1

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A4	ECR-26-270973	03MAR2026	DK	DC

- 1 CONTINUOUS STRIP ON REELS.
 - 2 ACCEPTS #22-#18 AWG WIRE SIZES. WIRE CRIMP: .080 F TYPE
 - 3 INSULATION RANGE IS 1.52-2.79 [.060-.110] DIA. INSULATION CRIMP: .130 F TYPE
- 4 AMP/TE LOGO

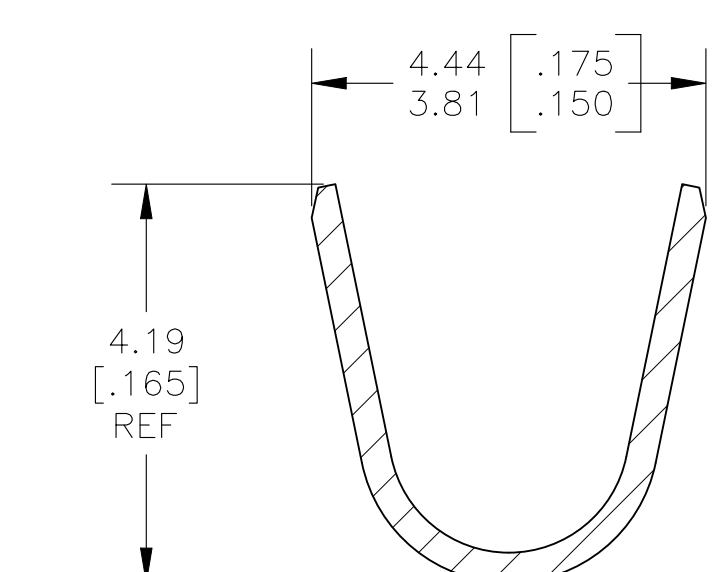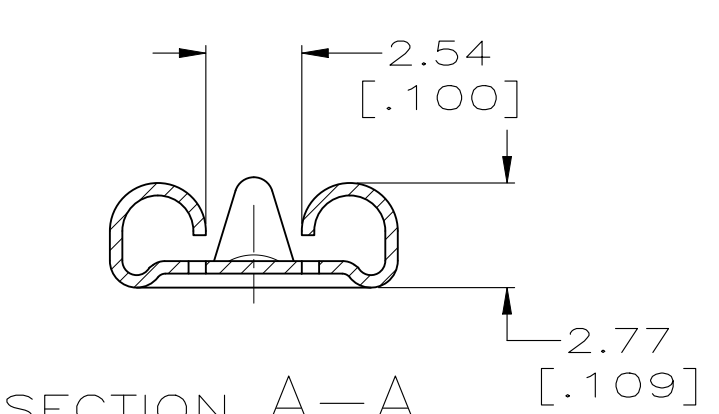

SECTION C-C
SCALE 10:1

0.00381[.000150] MIN SILVER PLATE	1217378-3
0.002032[.000080] MIN TIN PLATE	1217378-2
-	1217378-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR. RUTH 30MAR00	TE Connectivity	
DIMENSIONS: INCHES		CHK MS. FEHER 30MAR00		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD -	NAME RECEPTACLE, POSITIVE LOCK, 6.35 [.250] SERIES	
	0 PLC ± -	PRODUCT SPEC -		
	1 PLC ± -	APPLICATION SPEC -		
MATERIAL H06 BRASS	FINISH SEE TABLE	114-2074	SIZE A2	CAGE CODE 00779
		WEIGHT -	DRAWING NO C=1217378	RESTRICTED TO -
		CUSTOMER DRAWING	SCALE 5:1	SHEET 1 of 1
				REV A4