


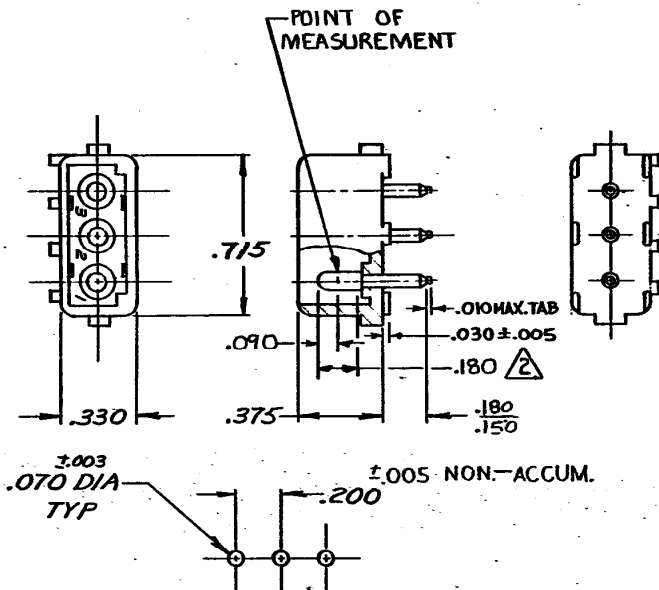

RECOMMENDED LAYOUT FOR
.062 THICK P.C. BOARD

1. PARTS COMPLY WITH TE SOLDERABILITY
SPEC. NO. 109-11-3

2 CONTACT IS PLATED OVERALL WITH .000050 NICKEL, THEN .000030 GOLD OVER CONTACT LENGTH INDICATED AND TIN PLATED ON SOLDER TAIL END.

3. DIMENSION SHOWN REPRESENT PRODUCT IN DRY CONDITION. ADDITIONAL 2% GROWTH DUE TO END USE LOCATION MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

SUPERSEDED BY
1586514-2

350210-2	NYLON NATURAL	COPPER ALLOY	-GOLD	2
----------	---------------	-----------------	-------	---

350210-1	NYLON - NATURAL	Copper Alloy - PRE-TIN
----------	-----------------	------------------------

ASSEMBLY NO.	HSG. MATL & COLOR	PIN MATL & FINISH
1	304 SS	304 SS
2	304 SS	304 SS
3	304 SS	304 SS
4	304 SS	304 SS
5	304 SS	304 SS
6	304 SS	304 SS
7	304 SS	304 SS
8	304 SS	304 SS
9	304 SS	304 SS
10	304 SS	304 SS
11	304 SS	304 SS
12	304 SS	304 SS
13	304 SS	304 SS
14	304 SS	304 SS
15	304 SS	304 SS
16	304 SS	304 SS
17	304 SS	304 SS
18	304 SS	304 SS
19	304 SS	304 SS
20	304 SS	304 SS
21	304 SS	304 SS
22	304 SS	304 SS
23	304 SS	304 SS
24	304 SS	304 SS
25	304 SS	304 SS
26	304 SS	304 SS
27	304 SS	304 SS
28	304 SS	304 SS
29	304 SS	304 SS
30	304 SS	304 SS
31	304 SS	304 SS
32	304 SS	304 SS
33	304 SS	304 SS
34	304 SS	304 SS
35	304 SS	304 SS
36	304 SS	304 SS
37	304 SS	304 SS
38	304 SS	304 SS
39	304 SS	304 SS
40	304 SS	304 SS
41	304 SS	304 SS
42	304 SS	304 SS
43	304 SS	304 SS
44	304 SS	304 SS
45	304 SS	304 SS
46	304 SS	304 SS
47	304 SS	304 SS
48	304 SS	304 SS
49	304 SS	304 SS
50	304 SS	304 SS
51	304 SS	304 SS
52	304 SS	304 SS
53	304 SS	304 SS
54	304 SS	304 SS
55	304 SS	304 SS
56	304 SS	304 SS
57	304 SS	304 SS
58	304 SS	304 SS
59	304 SS	304 SS
60	304 SS	304 SS
61	304 SS	304 SS
62	304 SS	304 SS
63	304 SS	304 SS
64	304 SS	304 SS
65	304 SS	304 SS
66	304 SS	304 SS
67	304 SS	304 SS
68	304 SS	304 SS
69	304 SS	304 SS
70	304 SS	304 SS
71	304 SS	304 SS
72	304 SS	304 SS
73	304 SS	304 SS
74	304 SS	304 SS
75	304 SS	304 SS
76	304 SS	304 SS
77	304 SS	304 SS
78	304 SS	304 SS
79	304 SS	304 SS
80	304 SS	304 SS
81	304 SS	304 SS
82	304 SS	304 SS
83	304 SS	304 SS
84	304 SS	304 SS
85	304 SS	304 SS
86	304 SS	304 SS
87	304 SS	304 SS
88	304 SS	304 SS
89	304 SS	304 SS
90	304 SS	304 SS
91	304 SS	304 SS
92	304 SS	304 SS
93	304 SS	304 SS
94	304 SS	304 SS
95	304 SS	304 SS
96	304 SS	304 SS
97	304 SS	304 SS
98	304 SS	304 SS
99	304 SS	304 SS
100	304 SS	304 SS

**CUSTOMER COPY
REFERENCE ONLY**

T4	REVISED PER ECR-21-117185	PJ	VS	25OCT 2021
T3	REVISED PER ECR-18-008156	JB	DZ	19JUL 2018
T2	REVISED PER ECR-13-008342	AV	RP	12NOV 2013
T1	REVISED PER ECO-11-005294	RK	HMR	07APR 11
LTR	REVISION RECORD	DR	CHK	DATE

NUMBER	REQUIRED PER ASSEMBLY					
350210						
	DESCRIPTION					

DR	4-12-73 9. Edwards	MATERIAL AND FINISH	SEE TABLE		 TE Connectivity	
CRK	4/12/73 Dm Polton/wage	WIRE - RANGE - INSULATION	H		CLASS	.084 DIA. PIN
DE	Thurble 4-13-73	TOLERANCE EXCEPT AS NOTED	SCALE	LOC	TYPE	PIN HEADER
APP	Thurble 1-13-73	± .015 ± 1° 0'	—H	CM	B	NO 350210
		NAME 3 CIRCUIT MITE-N-LOK P.C. BOARD HEADER				