


FEMALE PLUG M12 90° ANGLED TO MALE PLUG M12 STRAIGHT

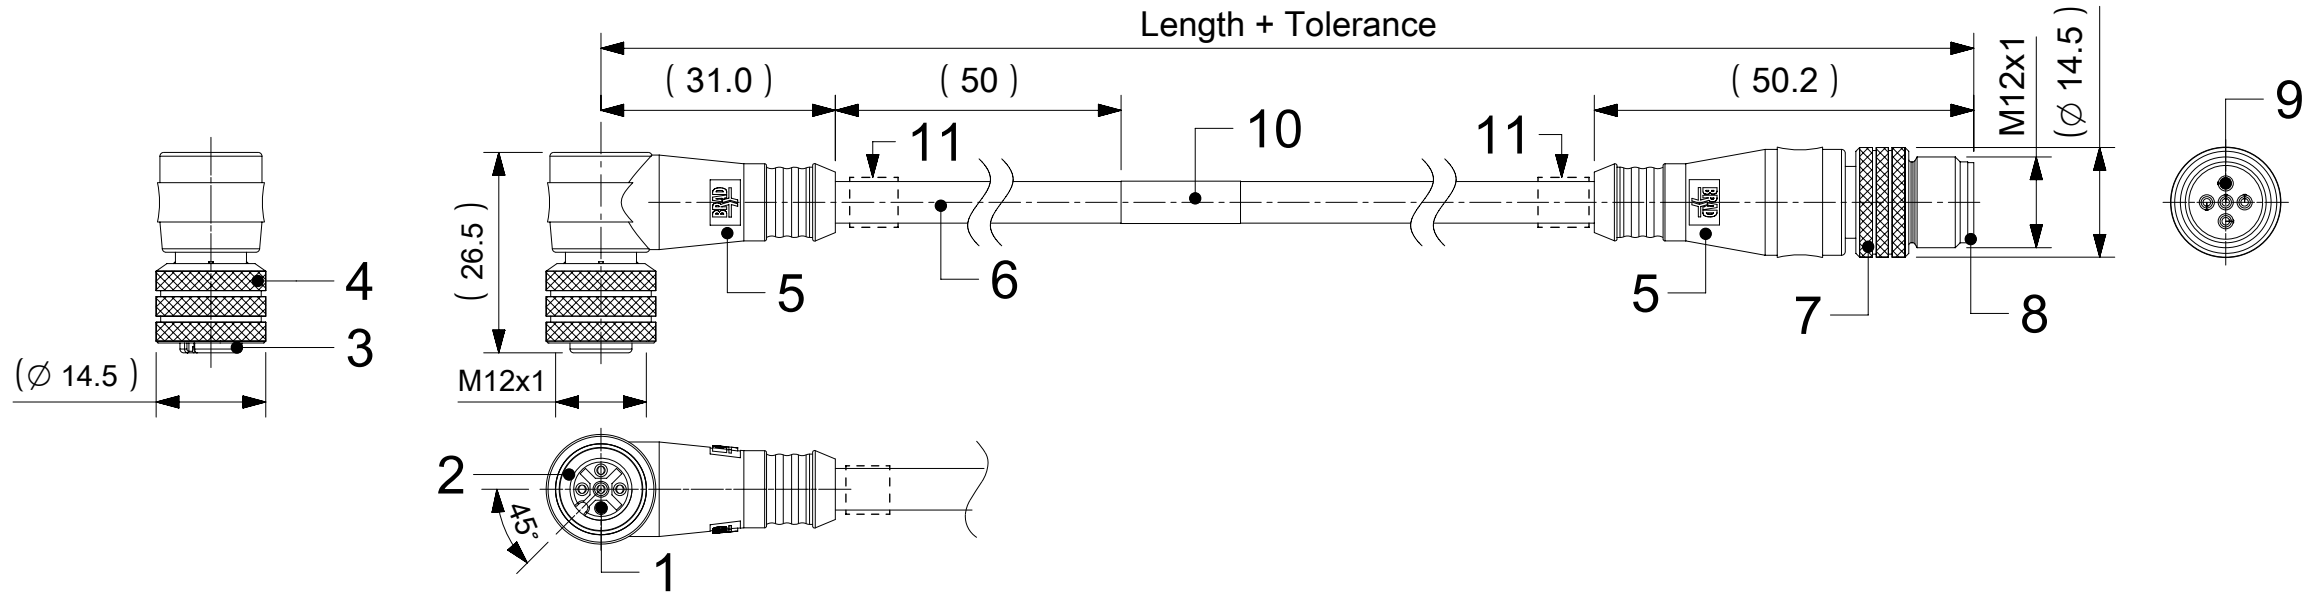

NOTES:

- RATED VOLTAGE: 3, 4 contacts 250V per IEC 60664
5 contacts 60V per IEC 60664
5 contacts 250V per UL 2238
8 contacts 30V per IEC 60664
- RATED CURRENT: 3, 4, 5 contacts 4A
8 contacts 2A
- PROTECTION CLASS: IP 67
TEMPERATURE: -25°C / +85°C

* FOR CABLES lxx USE PRINTING ON THE CABLE IN THE SAME MEASUREMENT LIKE FOR LABEL – ENGINEERING No

CONTACTS POSITION FRONT VIEW:

	3 CONTACTS		4 CONTACTS		5 CONTACTS		8 CONTACTS	
FEMALE								
MALE								
CONNECTIONS	PIN	WIRE	PIN	WIRE	PIN	WIRE	PIN	WIRE
	1	BROWN	1	BROWN	1	BROWN	1	WHITE
	2	---	2	WHITE	2	WHITE	2	BROWN
	3	BLUE	3	BLUE	3	BLUE	3	GREEN
	4	BLACK	4	BLACK	4	BLACK	4	YELLOW
	5	---	5	---	5	GREY OR GREEN/YELLOW	5	GREY
							6	PINK
							7	BLUE
CODING REQUIRED TO IEC 61076-2-101								

FOR OPTIONS SEE - NUMERICAL CODE - ON SHEET 2

11	SEE PART LIST	ID CARRIER	PVC	TRANSPARENT
10	1	LABEL YELLOW	VINYL	---
	-	PRINTING FOR CABLES lxx	---	---
9	3 / 4 / 5 / 8	CONTACT MALE	SEE PART LIST	SELECTIVE Au OVER Ni
8	1	INSERT MALE BLACK	SEE PART LIST	---
7	1	COUPLING NUT MALE	SEE PART LIST	---
6	-	CABLE	SEE SHEET 2	---
5	-	OVERMOULDING BLACK	SEE PART LIST	---
4	1	COUPLING NUT FEMALE	SEE PART LIST	---
3	1	INSERT FEMALE BLACK	SEE PART LIST	---
2	1	O-RING RED	FPM	---
1	3 / 4 / 5 / 8	CONTACT FEMALE	SEE PART LIST	SELECTIVE Au OVER Ni
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBER AS PER PCN#517152		
DIMENSION UNITS	SCALE			
mm	1:1			
GENERAL TOLERANCES (UNLESS SPECIFIED)		CSE M12 XP AC FE RA MA STR XM DE		
ANGULAR TOL	± 1.0 °	PRODUCT CUSTOMER DRAWING		
4 PLACES	±	EC NO: 840847	2025/11/21	
3 PLACES	±	DRWN: PONNAM	2025/11/25	
2 PLACES	± 0.05	CHK'D: GGA	2025/11/25	
1 PLACE	± 0.3	APPR: GGA	INITIAL REVISION:	
0 PLACES	± 0.5	DRWN: JMARSZALEK	2016/10/06	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPR: RSILLER	2016/12/08	
THIRD ANGLE PROJECTION		DRAWING	SERIES	DOCUMENT NUMBER
		A3-SIZE	120066	1200660973
MATERIAL NUMBER		CUSTOMER		DOC TYPE
		GENERAL MARKET		PSD
SHEET NUMBER		1 OF 4		DOC PART
				000
				A12
				REVISION

ENGINEERING NO. - NUMERICAL CODE

(Available parts see PART LIST table. Other parts available upon request).

OPTIONS

88X0X1XXXXXX

88=Micro-Change
M12x1
Double ended

Contacts:
3=3 Contacts
4=4 Contacts
5=5 Contacts
8=8 Contacts

Heads style:
031=Plug Female 90°
to Plug Male Straight
021=Plug Female 90°
to Plug Male Straight
with Female
Coupling Nut

Cable type: See Table


Units:
M=Meter
C=Centimeter

Length
Examples:
005=0.5 unit
010=1 unit
100=10 units

Coupling Nut:
Blank (Standard)=Knurled Brass Ni Plated
1=Hexagonal Stainless steel
5=Knurled Derlin
7=Knurled Brass Ni Plated, Teflon Coated
Blank=7 for cables I20, I26, K03, K05, P82, S26
9=Knurled / Hexagonal Brass Ni Plated SW13

H= 2 pcs. of I/D Carrier PVC Transparent
(Cables Ixx & P82 always with 2 pcs. of
I/D Carrier even if no H in Engineering No.)

COUPLING NUT
FEMALE MALE

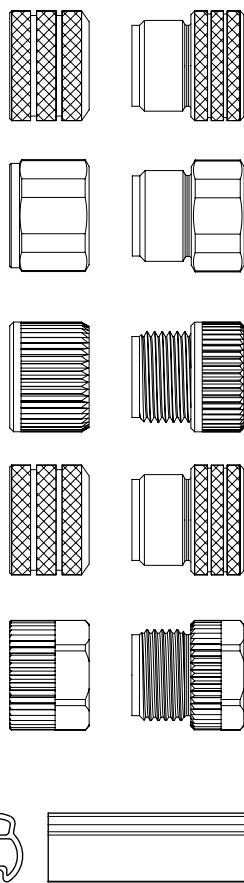

CABLE INFORMATION

(for more information see Cable Data Sheet).

CABLE TYPE	NO. OF WIRES	CROSS SECTION	CABLE JACKET	UL	CSA	STATIC: TEMP. / BENDING RADIUS	DYNAMIC: TEMP. / BENDING RADIUS	DRAG CHAIN	SHIELD
I03	3 / 4 / 5	0.34mm²	PVC CEI GREY	-	-	-30°C to +70°C	-5°C to +70°C	-	-
I20	3 / 4	0.34mm²	PVC CEI GREY	-	-	-30°C to +70°C	-5°C to +70°C	-	YES
I26	5	0.34mm²	PVC CEI GREY	-	-	-30°C to +70°C	-5°C to +70°C	-	YES
K03	4	18AWG	TPE YELLOW	UL ITC or PLC	I/II A/B 90°C/300V	max 105°C	-	-	-
K05	3 / 4 / 5	22AWG	TPE YELLOW	UL ITC or PLC	I/II A/B 90°C/300V	max 105°C	-	-	-
P82	3 / 4 / 5	0.34mm²	PUR IRR ORANGE	-	-	-50°C to +105°C, >5xO.D.	-40°C to +105°C, >7.5xO.D.	-	-
S20	3 / 4 / 5	0.34mm²	PVC YELLOW	UL 2661/1731	C22.2 II A 105°C/300V	-30°C to +105°C	-	-	YES
E02	3 / 4 / 5 / 8	0.25mm²	PVC BLACK	UL 2464/1729	C22.2 I/II A/B 80°C/300V	-30°C to +80°C, 10xO.D.	-10°C to +80°C, 15xO.D.	-	-
E03	3 / 4 / 5	0.34mm²	PVC BLACK	UL 2464/1729	C22.2 I/II A/B 80°C/300V	-30°C to +80°C, 10xO.D.	-10°C to +80°C, 15xO.D.	-	-
H09	3 / 4 / 5	0.34mm²	PUR BLACK LSOH	UL 21198/10493	C22.2 I/II A/B 80°C/300V	-40°C to +80°C, 5xO.D.	-25°C to +80°C, 10xO.D.	2 000 000 cycles at 20°C, Temp. range +5°C to +60°C	-
P03	3 / 4 / 5	0.34mm²	PUR / PVC BLACK	-	-	-30°C to +80°C, >7xO.D.	-5°C to +80°C, >15xO.D.	-	-
H08	8	0.25mm²	PUR BLACK LSOH	UL 21198/10493	UL 21198/10493	-40°C to +80°C, >5xO.D.	-25°C to +80°C, >10xO.D.	2 000 000 cycles, Temp max 60°C	-
P02	8	0.25mm²	PUR / PVC BLACK	-	-	-30°C to +80°C, >7xO.D.	-5°C to +80°C, >15xO.D.	-	-

CABLE LENGTH TOLERANCES

OVER	UP TO AND INCLUDING	TOLERANCES
0	305mm	+19mm
305mm	915mm	+45mm
915mm	1830mm	+56mm
1830mm	3660mm	+89mm
3660mm	7320mm	+165mm
7320mm	14640mm	+317mm
14640mm	30500mm	+610mm
30500mm	>	+2% of finished length

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS

mm

SCALE

1:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL ± 1.0 °

4 PLACES ±

3 PLACES ±

2 PLACES ± 0.05

1 PLACE ± 0.3

0 PLACES ± 0.5

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: REMOVED OBSOLETE PART NUMBER AS PER PCN#517152

EC NO: 840847

DRWN: PONNAM

CHK'D: GGA

APPR: GGA

INITIAL REVISION:

DRWN: JMARSZALEK

APPR: RSILLER

THIRD ANGLE PROJECTION

DRAWING

SERIES

MATERIAL NUMBER

CUSTOMER

SHEET NUMBER

2025/11/21

2025/11/25

2025/11/25

2016/10/06

2016/12/08

A3-SIZE

120066

GENERAL MARKET

2 OF 4

molex

CSE M12 XP AC FE RA MA STR XM DE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER

1200660973

DOC TYPE

PSD

DOC PART

000

REVISION

A12

	10	9	8	7	6	5	4	3	2	1						
	PART LIST															
F	No. Part No. Engineering No. Cable Length			No. Part No. Engineering No. Cable Length			No. Part No. Engineering No. Cable Length			Pos. Part No. Engineering No. Cable Length						
	1	1200060052	884031I20M005	0.5m	36	1200072725	885031I26M005	0.5m	71	1200665039	884031S20M003	0.3m	106	1200668912	883031E03M050H	5m
	2	1200060053	884031I20M010	1m	37	1200072726	885031I26M010	1m	72	1200665053	884031S20M060H	6m	107	1200668175	883031E03M060	6m
	3	1200060054	884031I20M015	1.5m	38	1200659070	884031I20M010Y	1m	73	1200665074	884031K05M080	8m	108	1200070127	883031E03M100	10m
	4	1200060055	884031I20M020	2m	39	1200659071	884031I20M015Y	1.5m	74	1200668052	883031S20M006	0.6m	109	1200658762	883031H09M006	0.6m
E	5	1200070132	883031I03M003	0.3m	40	1200659115	884031I20M005Y	0.5m	75	1200668071	884031S20M020	2m	110	1200658763	883031H09M010	1m
	6	1200070133	883031I03M006	0.6m	41	1200660374	884031K05M005	0.5m	76	1200668191	883031S20M030	3m	111	1200658764	883031H09M020	2m
	7	1200070134	883031I03M010	1m	42	1200660375	884031K05M006	0.6m	77	1200668237	883031S20M100	10m	112	1200658765	883031H09M030	3m
	8	1200070136	883031I03M020	2m	43	1200660376	884031K05M010	1m	78	1200668258	883031I03M080	8m	113	1200669349	883031H09M030H	3m
	9	1200070137	883031I03M030	3m	44	1200660377	884031K05M015	1.5m	79	1200668287	884031I20M025	2.5m	114	1200658766	883031H09M040	4m
	10	1200070138	883031I03M050	5m	45	1200660378	884031K05M020	2m	80	1200668667	884031I20M030Y	3m	115	1200658767	883031H09M050	5m
	11	1200070152	883031S20M010	1m	46	1200660379	884031K05M030	3m	81	1200070443	884021S20M003	0.3m	116	1200658768	883031H09M100	10m
	12	1200070153	883031S20M020	2m	47	1200660380	884031K05M040	4m	82	1200070444	884021S20M006	0.6m	117	1200070140	883031P03M003	0.3m
	13	1200070156	883031S20M050	5m	48	1200660381	884031K05M050	5m	83	1200070445	884021S20M010	1m	118	1200070141	883031P03M006	0.6m
	14	1200070522	884031I03M020	2m	49	1200660382	884031K05M060	6m	84	1200070446	884021S20M020	2m	119	1200070142	883031P03M010	1m
	15	1200070523	884031I03M030	3m	50	1200660383	884031S20M010	1m	85	1200070447	884021S20M030	3m	120	1200668324	883031P03M010G	1m
	16	1200070534	884031S20M030	3m	51	1200660546	884031K05M100	10m	86	1200070449	884021S20M050	5m	121	1200071121	883031P03M010H	1m
	17	1200070651	884031I03M006	0.6m	52	1200661046	885031K03M010	1m	87	1200668160	883021S20M010	1m	122	1200070143	883031P03M020	2m
D	18	1200070768	884031S20M050	5m	53	1200661047	885031K03M020	2m	88	1200668608	883031E02M020	2m	123	1200668325	883031P03M020G	2m
	19	1200070783	884031S20M100H	10m	54	1200661049	885031K									


No.	Part No	Engineering No.	Cable Length
36	1200072725	885031I26M005	0.5m
37	1200072726	885031I26M010	1m
38	1200659070	884031I20M010Y	1m
39	1200659071	884031I20M015Y	1.5m
40	1200659115	884031I20M005Y	0.5m
41	1200660374	884031K05M005	0.5m
42	1200660375	884031K05M006	0.6m
43	1200660376	884031K05M010	1m
44	1200660377	884031K05M015	1.5m
45	1200660378	884031K05M020	2m
46	1200660379	884031K05M030	3m
47	1200660380	884031K05M040	4m
48	1200660381	884031K05M050	5m
49	1200660382	884031K05M060	6m
50	1200660383	884031S20M010	1m
51	1200660546	884031K05M100	10m
52	1200661046	885031K03M010	1m
53	1200661047	885031K03M020	2m
54	1200661049	885031K03M040	4m
55	1200661050	885031K03M050	5m
56	1200661769	884031K05M150	15m
57	1200669556	885031P03M015	1.5m
58	1200660969	884031K03M003	0.3m
59	1200661481	884031K03M120	12m
60	1200660971	884031K03M006	0.6m
61	1200660973	884031K03M010	1m
62	1200660975	884031K03M015	1.5m
63	1200660976	884031K03M020	2m
64	1200660977	884031K03M030	3m
65	1200660978	884031K03M040	4m
66	1200660980	884031K03M050	5m
67	1200660982	884031K03M060	6m
68	1200660983	884031K03M070	7m
69	1200660984	884031K03M090	9m
70	1200660985	884031K03M100	10m

No.	Part No.	Engineering No.	Cable Length
71	1200665039	884031S20M003	0.3m
72	1200665053	884031S20M060H	6m
73	1200665074	884031K05M080	8m
74	1200668052	883031S20M006	0.6m
75	1200668071	884031S20M020	2m
76	1200668191	883031S20M030	3m
77	1200668237	883031S20M100	10m
78	1200668258	883031I03M080	8m
79	1200668287	884031I20M025	2.5m
80	1200668667	884031I20M030Y	3m
81	1200070443	884021S20M003	0.3m
82	1200070444	884021S20M006	0.6m
83	1200070445	884021S20M010	1m
84	1200070446	884021S20M020	2m
85	1200070447	884021S20M030	3m
86	1200070449	884021S20M050	5m
87	1200668160	883021S20M010	1m
88	1200668608	883031E02M020	2m
89	1200668613	883031E02M030	3m
90	1200659035	883031E02M050	5m
91	1200668612	883031E02M100	10m
92	1200668908	883031E03M003H	0.3m
93	1200070118	883031E03M006	0.6m
94	1200668909	883031E03M006H	0.6m
95	1200070119	883031E03M010	1m
96	1200668910	883031E03M010H	1m
97	1200070945	883031E03M015	1.5m
98	1200668967	883031E03M015H	1.5m
99	1200070121	883031E03M020	2m
100	1200072445	883031E03M020H	2m
101	1200070123	883031E03M030	3m
102	1200668911	883031E03M030H	3m
103	1200072164	883031E03M040	4m
104	1200668968	883031E03M040H	4m
105	1200070125	883031E03M050	5m

Pos.	Part No.	Engineering No.	Cable Length
106	1200668912	883031E03M050H	5m
107	1200668175	883031E03M060	6m
108	1200070127	883031E03M100	10m
109	1200658762	883031H09M006	0.6m
110	1200658763	883031H09M010	1m
111	1200658764	883031H09M020	2m
112	1200658765	883031H09M030	3m
113	1200669349	883031H09M030H	3m
114	1200658766	883031H09M040	4m
115	1200658767	883031H09M050	5m
116	1200658768	883031H09M100	10m
117	1200070140	883031P03M003	0.3m
118	1200070141	883031P03M006	0.6m
119	1200070142	883031P03M010	1m
120	1200668324	883031P03M010G	1m
121	1200071121	883031P03M010H	1m
122	1200070143	883031P03M020	2m
123	1200668325	883031P03M020G	2m
124	1200668753	883031P03M020H	2m
125	1200070144	883031P03M030	3m
126	1200668326	883031P03M030G	3m
127	1200070145	883031P03M050	5m
128	1200668520	883031P03M070	7m
129	1200070146	883031P03M100	10m
130	1200070507	884031E03M003	0.3m
131	1200070508	884031E03M006	0.6m
132	1200070509	884031E03M010	1m
133	1200668361	884031E03M015	1.5m
134	1200070511	884031E03M020	2m
135	1200070512	884031E03M030	3m
136	1200669260	884031E03M030H	3m
137	1200070904	884031E03M050	5m
138	1200071157	884031E03M060	6m
139	1200071278	884031E03M100	10m
140	1200072011	884031E03M200	20m
141	1200668669	884031H09M006	0.6m
142	1200668846	884031H09M008	0.8m

FORMAT: master-tb-prod-A3
REVISION: J1
DATE: 2021/05/01

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBER AS PER PCN#517152				molex					
mm		1:1											
GENERAL TOLERANCES (UNLESS SPECIFIED)								CSE M12 XP AC FE RA MA STR XM DE					
ANGULAR TOL ± 1.0°													
4 PLACES		±		EC NO: 840847 DRWN: PONNAM 2025/11/21 CHK'D: GGA 2025/11/25 APPR: GGA 2025/11/25				PRODUCT CUSTOMER DRAWING					
3 PLACES		±											
2 PLACES		± 0.05											
1 PLACE		± 0.3		INITIAL REVISION: DRWN: JMARSZALEK 2016/10/06 APPR: RSILLER 2016/12/08				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	
0 PLACES		± 0.5						1200660973		PSD	000	A12	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION 		DRAWING A3-SIZE		SERIES 120066		MATERIAL NUMBER		CUSTOMER GENERAL MARKET	SHEET NUMBER 3 OF 4

F	Pos.	Part No.	Engineering No.	Cable Length	F					
	143	1200668210	884031H09M009	0.9m						
	144	1200668484	884031H09M010	1m						
	145	1200668848	884031H09M013	1.3m						
	146	1200668488	884031H09M015	1.5m						
	147	1200668845	884031H09M018	1.8m						
	148	1200668212	884031H09M020	2m						
	149	1200668847	884031H09M021	2.1m						
	150	1200668215	884031H09M030	3m						
	151	1200668670	884031H09M050	5m						
	152	1200668671	884031H09M100	10m						
	153	1200070526	884031P03M003	0.3m						
	154	1200070527	884031P03M006	0.6m						
	155	1200060056	884031P03M010	1m						
	156	1200060057	884031P03M020	2m						
	157	1200070529	884031P03M030	3m						
	158	1200071187	884031P03M050	5m						
	159	1200072012	884031P03M100	10m						
	E	160	1300288001	885031D12M020		2m	E			
161		1200668658	885031E02M020	2m						
162		1200668610	885031E02M050	5m						
163		1200668660	885031E02M100	10m						
164		1200668339	885031E03M006	0.6m						
165		1200668189	885031E03M010	1m						
166		1200668278	885031E03M020	2m						
167		1200668340	885031E03M030	3m						
168		1200668279	885031E03M050	5m						
169		1200668653	885031E03M070	7m						
170		1200668348	885031E03M100	10m						
171		1200668761	885031E03M150	15m						
172		1200669229	885031H09C250	25m						
173		1200668512	885031H09M006	0.6m						
174		1200668496	885031H09M010	1m						
175		1200668513	885031H09M020	2m						
176		1200668514	885031H09M030	3m						
177		1200668515	885031H09M050	5m						
D		178	1200668516	885031H09M100	10m	D				
	179	1200073085	885031P03M006	0.6m						
	180	1200668188	885031P03M010	1m						
	181	1200072376	885031P03M0105	1m						
	182	1200070917	885031P03M020	2m						
	183	1200668091	885031P03M025	2.5m						
	184	1200070919	885031P03M030	3m						
	185	1200668273	885031P03M050	5m						
	186	1200073086	885031P03M100	10m						
	187	1200070434	884021E03M020	2m						
	188	1200658319	888031H08M050	5m						
	189	1200668673	888031E02M0041	0.4m						
	190	1200668849	888031P02M150	15m						
	C	191	1200656208	888031H08C250	2.5m		C			
		192	1200656209	888031H08M005	0.5m					
		193	1200656210	888031H08M008	0.8m					
		194	1200656211	888031H08M012	1.2m					
		195	1200656212	888031H08M015	1.5m					
		196	1200070057	883021E03M006	0.6m					
197		1200070058	883021E03M020	2m						
198		1200070439	884021P03M006	0.6m						
199		1200070440	884021P03M010	1m						
200		1200070441	884021P03M020	2m						
201		1200070442	884021P03M030	3m						
202		1200070870	883021P03M050	5m						
203		1200072191	883021E03M030	3m						
204		1200072198	883021E03M050	5m						
205		1200665038	884021E03M050	5m						
206		1200668061	884021E03M006	0.6m						
207		1200668219	884021E03M030	3m						
B		208	1200668673	888031E02M0041	0.4m	B				
		209	1200669541	884031P03M015	1.5m					
	210	1200669885	884031E03M004	0.4m						
	211	1200669886	884031E03M005	0.5m						
	212	1200669887	884031E03M013	1.3m						
	213	1200669888	884031E03M080	8m						
	214	1200070510	883031E03M070	7m						
	A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					A			
		DIMENSION UNITS	SCALE	CURRENT REV DESC: REMOVED OBSOLETED PART NUMBER AS PER PCN#517152				molex		
		mm	1:1							
		GENERAL TOLERANCES (UNLESS SPECIFIED)								
		ANGULAR TOL	± 1.0 °					CSE M12 XP AC FE RA MA STR XM DE		
		4 PLACES	±							
		3 PLACES	±							
		2 PLACES	± 0.05					PRODUCT CUSTOMER DRAWING		
		1 PLACE	± 0.3							
		0 PLACES	± 0.5							
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING	SERIES			MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
				A3-SIZE	120066				GENERAL MARKET	4 OF 4
DOCUMENT STATUS		P1	RELEASE DATE	2025/11/25	05:37:48					
FORMAT: master-b-prod-A3		9		8		7				
REVISION: 11						6				
DATE: 2021/05/01						5				
						4				
						3				
						2				
						1				

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBER AS PER PCN#517152							
mm		1:1									
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 840847 DRWN: PONNAM2025/11/21 CHK'D: GGA2025/11/25 APPR: GGA2025/11/25							
ANGULAR TOL		±	1.0 °								
4 PLACES		±									
3 PLACES		±									
2 PLACES		±	0.05								
1 PLACE		±	0.3	INITIAL REVISION: DRWN: JMARSZALEK2016/10/06 APPR: RSILLER2016/12/08							
0 PLACES		±	0.5								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES			
						A3-SIZE		120066			
						CSE M12 XP AC FE RA MA STR XM DE					
						PRODUCT CUSTOMER DRAWING					
DOCUMENT NUMBER						DOC TYPE		DOC PART		REVISION	
1200660973						PSD		000		A12	
MATERIAL NUMBER				CUSTOMER				SHEET NUMBER			
				GENERAL MARKET				4 OF 4			