

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

2068322202

Status:

Active

Overview:

Micro-Fit+ Connector System

Description:

Micro-Fit+ Vertical Header, Through Hole, 3.00mm Pitch, Dual Row, 22 Circuits, 0.38µm Gold (Au) Plating, Glow-Wire Capable, Black, Tray

Documents:

- 3D Model

Packaging Specification 2068320000-PK-000 (PDF)
- Drawing (PDF)

Test Summary 2064600000-TS-000 (PDF)
- 3D Model (PDF)

Datasheet (PDF)
- Product Specification 2064600000-PS-000 (PDF)

RoHS Certificate of Compliance (PDF)
- Application Specification 2064600001-AS-000 (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

PCB Headers

Series

206832

Application

Power, Wire-to-Board

Component Type

PCB Header

Overview

Micro-Fit+ Connector System

Product Name

Micro-Fit+

Taxonomy

PCB Headers and Receptacles

UPC

193264162536

Physical

Breakaway

No

Circuits (Loaded)

22

Circuits (maximum)

22

Color - Resin

Black

Durability (mating cycles max)

200

First Mate / Last Break

No

Flammability

94V-0

Glow-Wire Capable

Yes

Keying to Mating Part

Yes

Lock to Mating Part

Yes

Material - Metal

High Copper Alloy

Material - Plating Mating

Gold

Material - Plating Termination

Matte Tin

Material - Resin

Liquid Crystal Polymer

Net Weight

2.686/g

Number of Rows

2

Orientation

Vertical

PC Tail Length

3.18mm

PCB Thickness - Recommended

1.57mm

Packaging Type

Tray

Pitch - Mating Interface

3.00mm

Pitch - Termination Interface

3.00mm

Plating min - Mating

0.380µm

Polarized to Mating Part

Yes

Polarized to PCB

Yes

Shrouded


Yes

Temperature Range - Operating

-40° to +105°C

Termination Interface: Style

Through Hole

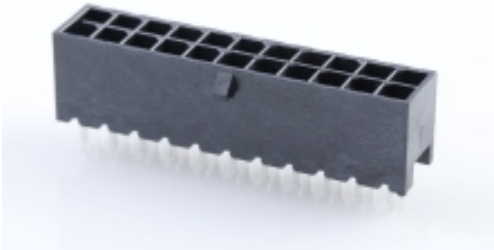

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

206832 Series

Mates With

Micro-Fit+ Receptacle [206461](#)

Electrical

Current - Maximum per Contact	12.0A
Voltage - Maximum	600V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Application Specification	2064600001-AS-000
Packaging Specification	2068320000-PK-000
Product Specification	2064600000-PS-000
Sales Drawing	2068320000-SD-000
Test Summary	2064600000-TS-000

This document was generated on 01/05/2023

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION