
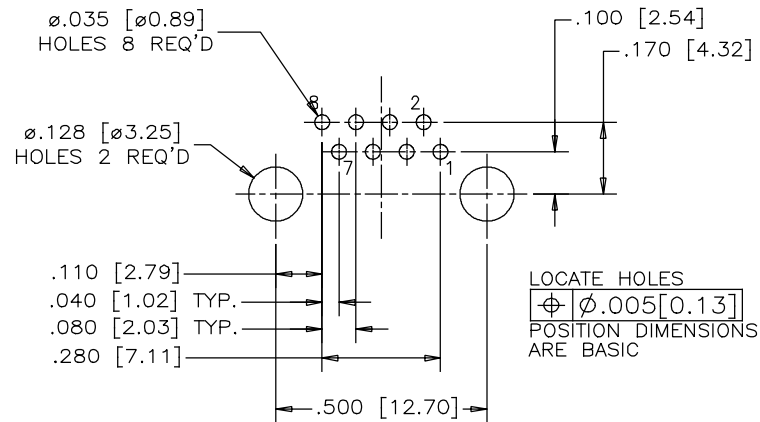
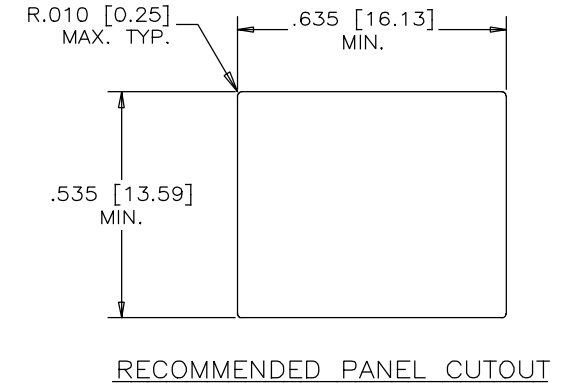
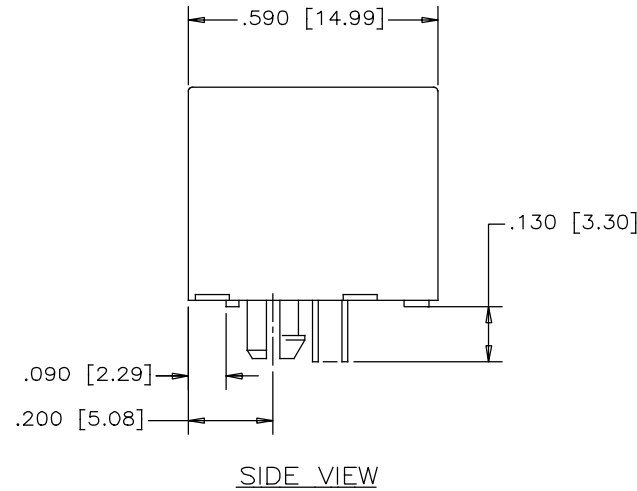


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	MAR13/18	L.CHAN

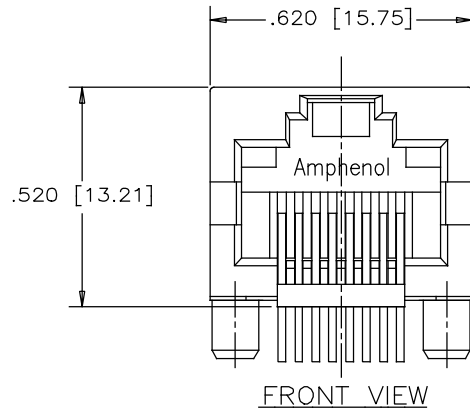

LOCATE HOLES
 $\phi \phi.005 [0.13]$
 POSITION DIMENSIONS
 ARE BASIC

MATERIALS:

PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0, COLOR BLACK

CONTACTS:

PHOSPHOR BRONZE
 PLATING: GOLD PLATING ON MATING SURFACE.
 [SEE PART NUMBER FOR THICKNESS]
 50 μ " [1.27 MICRONS]
 MIN. NICKEL UNDERPLATE
 100 μ " [2.54 MICRONS]
 MIN. MATTE TIN ON CONTACT TAILS.

PART NUMBER: RJHSE-X080-A1

GOLD PLATING

E=RJ45 FLAT CONTACT 6u"
 G=RJ45 FLAT CONTACT 15u"
 J=RJ45 FLAT CONTACT 30u"
 5=RJ45 FLAT CONTACT 50u"



THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS SPECIFIED OTHERWISE		DRAWN	W.QIU		DATE	MAR13/18		Amphenol Canada Corp. www.amphenolcanada.com					
PRIMARY UNITS INCH		CHECKED	L.CHAN		DATE	MAR13/18							
SECONDARY MILLIMETER		M.E. APP'D						TITLE SINGLE-PORT HIGH SPEED RJ45, 8P8C WITHOUT SHIELD & LEADS, 0.13" LONG CONTACT TAIL, -ROHS COMPLIANT					
REFERENCE IN PARENTHESES		Q.A. APP'D											
GENERAL TOLERANCES		DWG APPR.											
1 DECIMAL PLACE ±0.025		ENG. REL. NO.											
2 DECIMAL PLACES ±0.020		REF.						DWG. NO.		P-RJHSE-X080-A1		REV	A
3 DECIMAL PLACES ±0.015		THIRD ANGLE PROJECTION				DO NOT SCALE DRAWING		CODE ID NO. 03554		DWG SIZE: c	SCALE: N/A	SHEET 1	OF 1
ANGULAR DEGREES ±1.0°													