
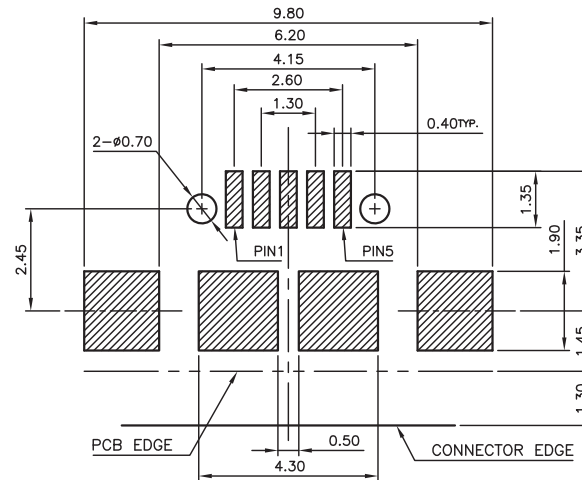
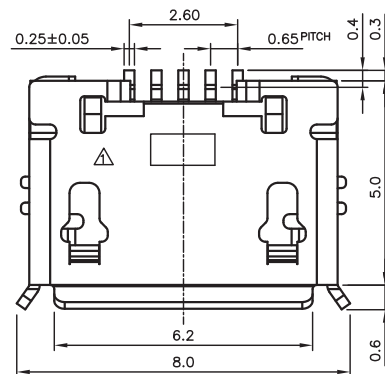
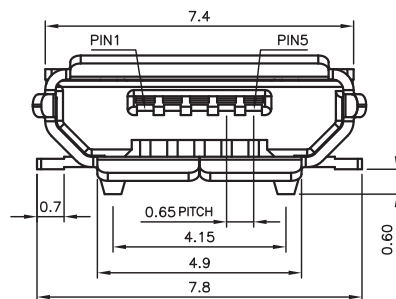


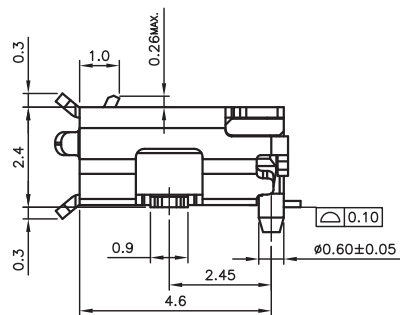

PCB LAYOUT - COMPONENT VIEW
TOLERANCE: $\pm 0.05\text{mm}$

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR MATERIAL: LCP
FLAMMABILITY RATING UL94-V0
COLOUR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: SELECTIVE GOLD
SHIELDING: BRASS NI PLATED
QUALITY CLASS: 10.000 MATING CYCLES

ENVIRONMENTAL
OPERATING TEMPERATURE: $-40\text{ }^{\circ}\text{C}$ UP TO $105\text{ }^{\circ}\text{C}$
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING:
- PIN 1 & PIN 5 (Vbus & corresponding ground PIN) 1.8A MAX
- OTHER PINS 1A MAX
WORKING VOLTAGE: 30 V
INSULATION RESISTANCE: $>1000\text{ M}\Omega$
DIELECTRIC WITHSTANDING VOLTAGE: 750 VAC/MIN
CONTACT RESISTANCE: 30 m Ω MAX

STANDARD
WURTH CERTIFIED: E323964

SOLDERING
JEDEC LEAD FREE REFLOW SOLDERING

PACKAGING
TAPE AND REEL

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = ± 0.2

.XX = ± 0.15



APPROVAL: NPr

UNIT: MM

SCALE:

SHEET: 1/3


DRAW: AS


DESCRIPTION: MICRO USB 2.0 SMT TYPE B 5 CONTACTS - WR-COM

WERI PART NO: 629 105 136 821

SIZE

A4

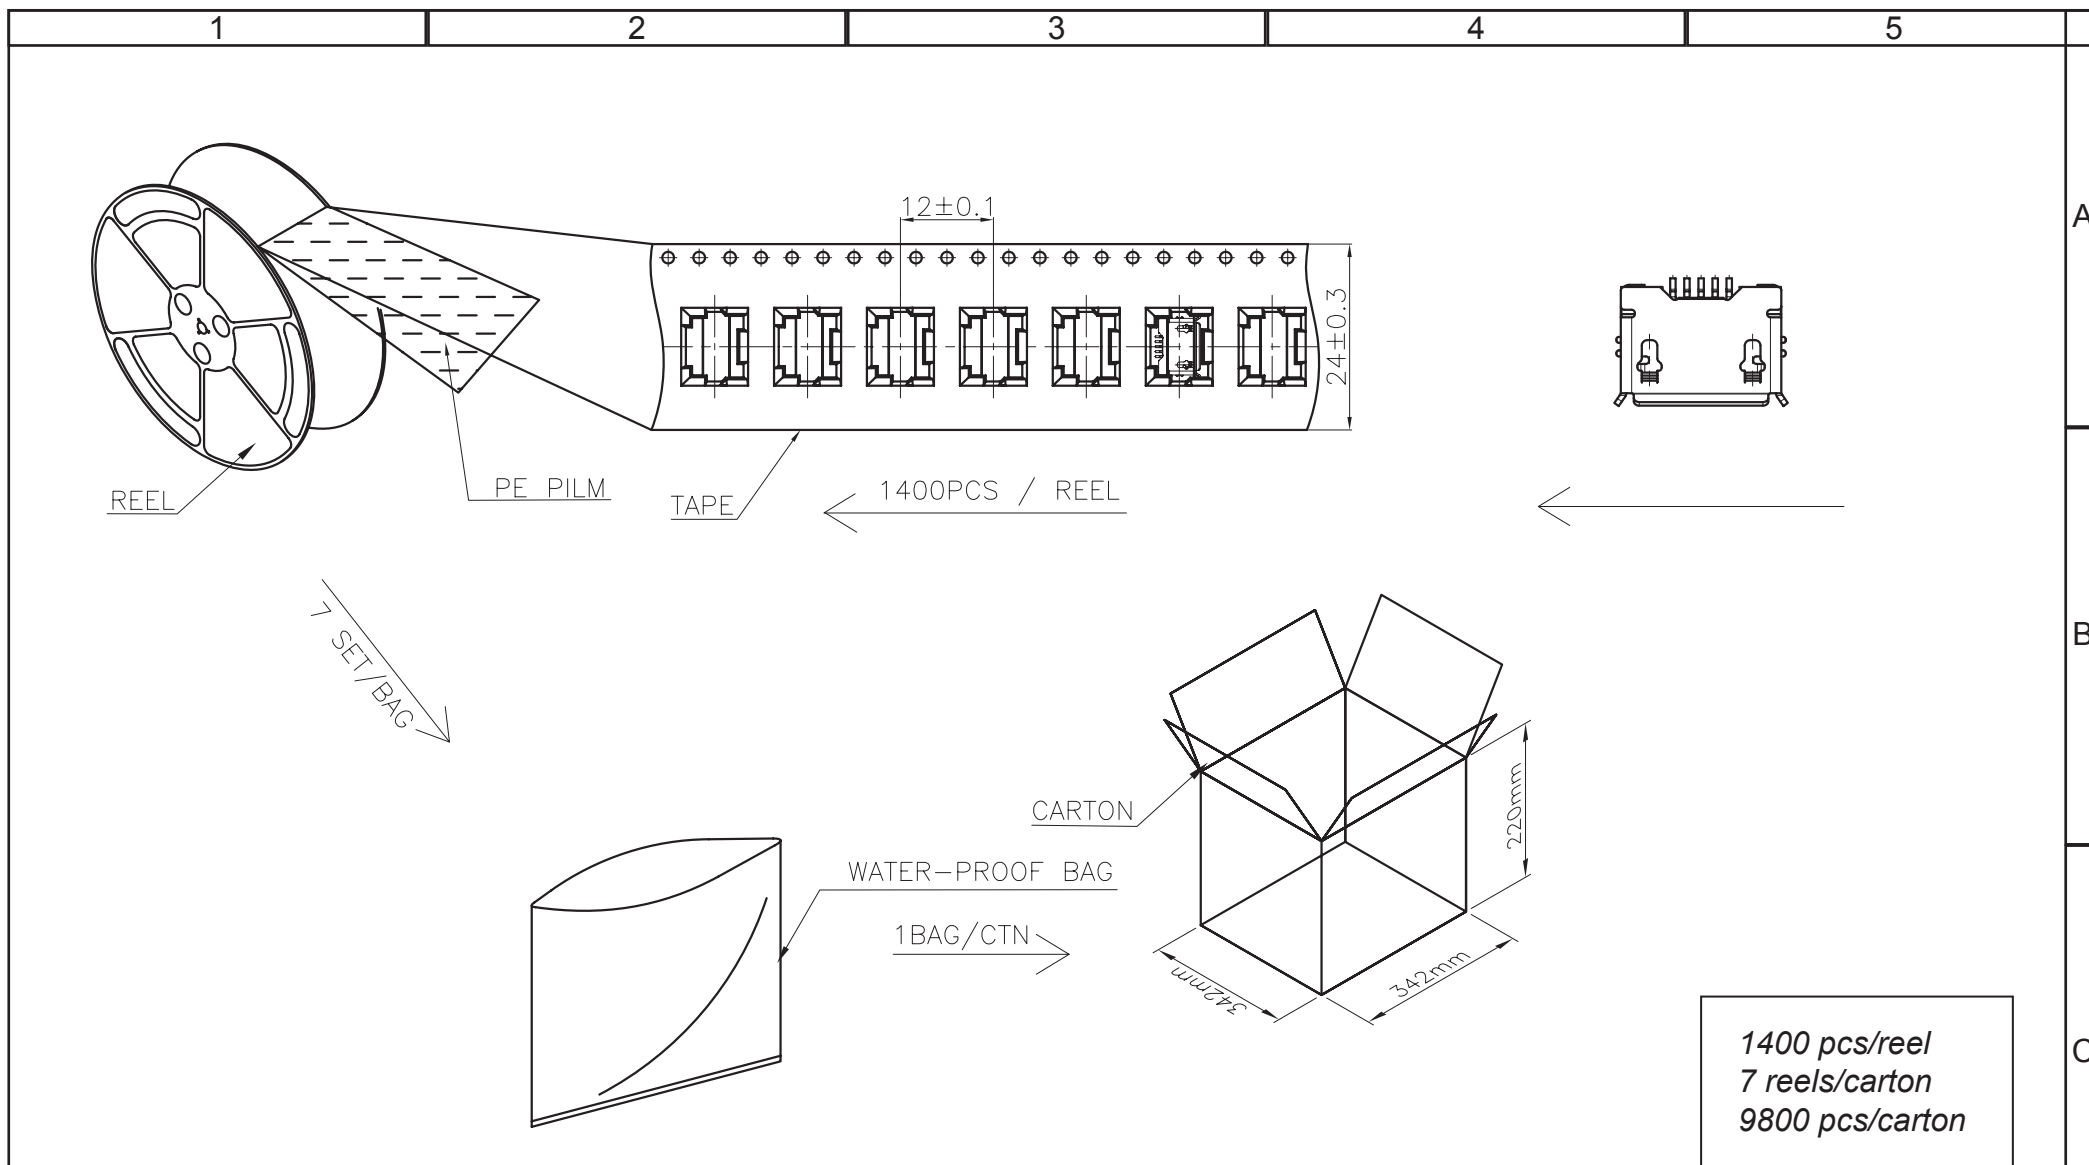

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15			
				APPROVAL: NPr	UNIT: MM	DESCRIPTION: MICRO USB 2.0 SMT TYPE B 5 CONTACTS - WR-COM		SIZE A4
					SCALE:			
					SHEET: 2/3	WERI PART NO: 629105136821		
					DRAW: AS			
REV	DATE	FILE	BY					

