




MULTI-BEAM

TE Internal #: 6450523-2
PCB Mount Header, Right Angle, Board-to-Board, 6 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold, Through Hole - Press-Fit, Power, Black

[View on TE.com >](#)

Connectors > PCB Connectors > PCB Headers & Receptacles

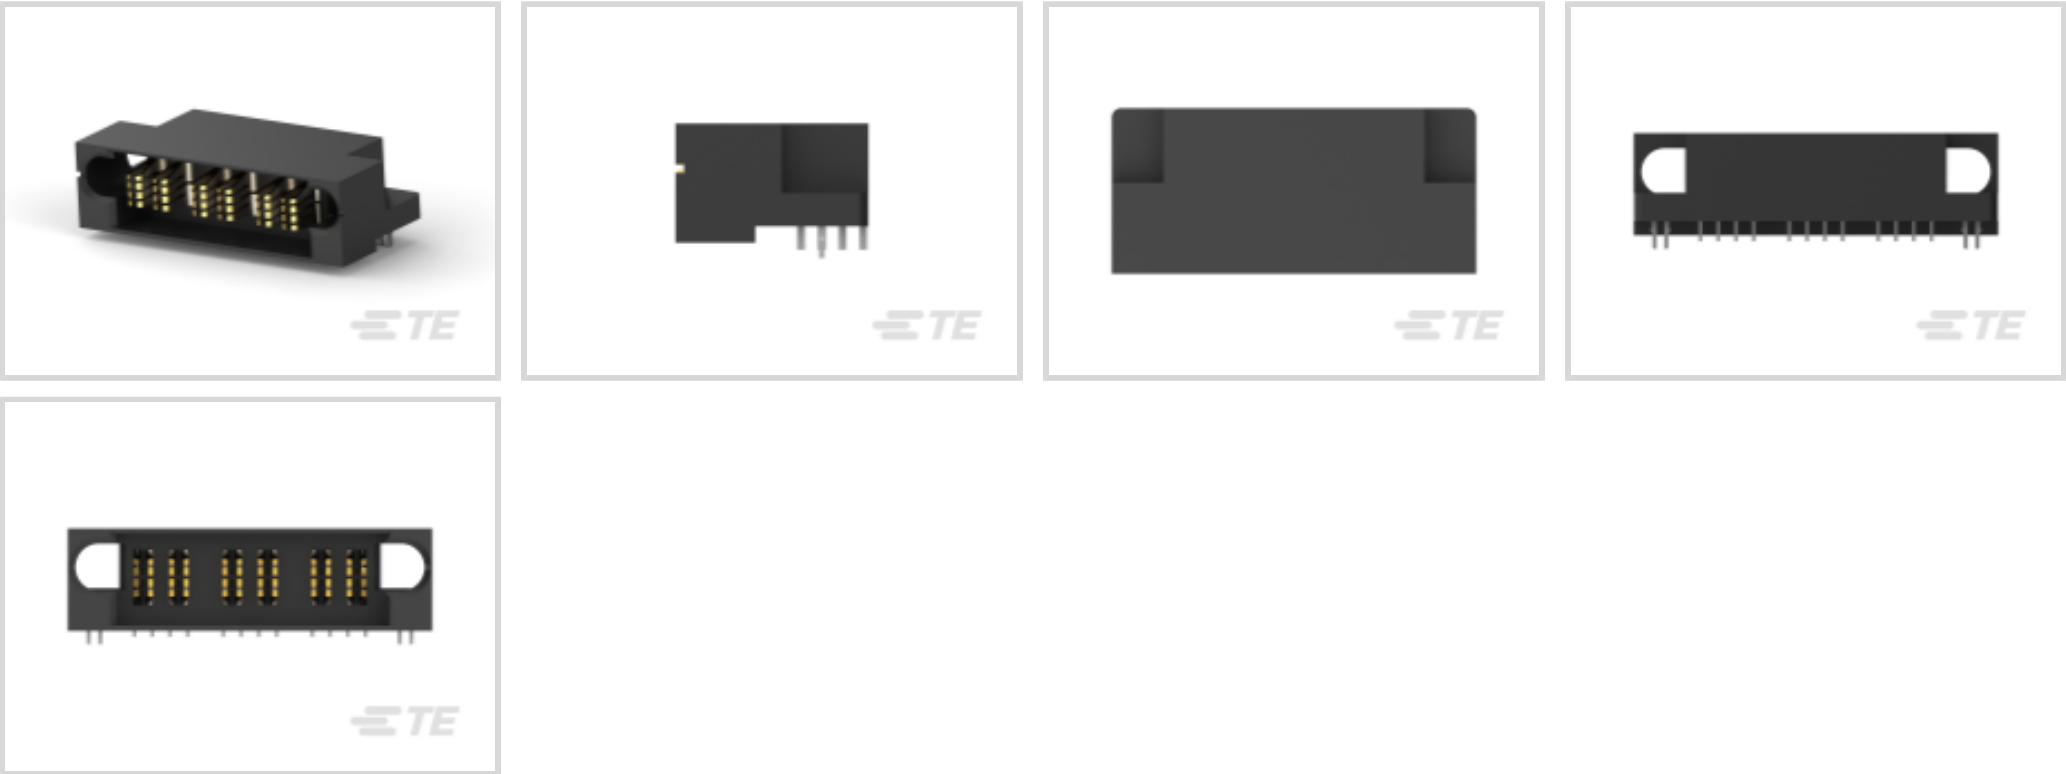

EU RoHS Compliance: **Compliant**
EU ELV Compliance: **Compliant**
PCB Connector Assembly Type: **PCB Mount Header**
PCB Mount Orientation: **Right Angle**
Connector System: **Board-to-Board**

Features

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Product Type Features

Connector Shape	Rectangular
PCB Connector Assembly Type	PCB Mount Header
Connector System	Board-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Columns	6
Number of Loaded Positions	6
Number of Power Positions	6
PCB Mount Orientation	Right Angle



Number of Positions	6
Number of Rows	1

Electrical Characteristics

Operating Voltage	60 VDC
-------------------	--------

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 μm[50 μin]
Contact Mating Area Plating Material Thickness	.076 μm[3 μin]
PCB Contact Termination Area Plating Material Thickness	2.54 – 5.08 μm[100 – 200 μin]
Contact Layout	Inline
Contact Base Material	Copper Alloy
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Gold
Contact Type	Blade
Contact Current Rating (Max)	42 A

Termination Features

Termination Post & Tail Length	3.05 mm[.12 in]
Termination Method to PCB	Through Hole - Press-Fit

Mechanical Attachment

Mating Retention	Without
Mating Alignment Type	Polarization
PCB Mount Retention Type	Hold-Down
PCB Mount Alignment Type	Hold-Down
PCB Mount Retention	With
PCB Mount Alignment	With
Connector Mounting Type	Board Mount
Mating Alignment	With

Housing Features

Housing Material	High Temperature Thermoplastic Glass-Filled
------------------	---



Centerline (Pitch)	2.54 mm[.1 in]
--------------------	----------------

Dimensions

Connector Width	23.62 mm[.93 in]
PCB Thickness (Recommended)	1.35 mm[.053 in]
Connector Height	14.58 mm[.574 in]
Connector Length	52.07 mm[2.05 in]

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Glow Wire Rating	High Temperature Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	44
Packaging Method	Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent



chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 6450553-2
MBXL VERT RCPT 6P


Customers Also Bought



TE Part #2102352-2
CeeLok FAS-T, Receptacle Kit, ZnNi

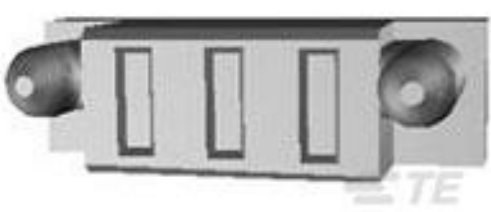

TE Part #6450543-6
MBXL VERT RCPT 3ACP

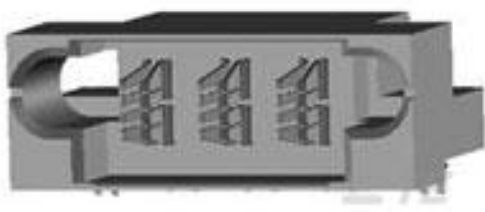

TE Part #6450123-3
MBXL R/A HDR 3ACP+0P



TE Part #1827685-4
2mm pitch Battery Rec. Assy. 7Pos. RVS.



TE Part #1757836-1
AMPLIMITE,R/A RCPT ASY,109,ZN,1



TE Part #1827654-2
2mm pitch Battery Plug Assy. 7P. H=4.0



TE Part #1757828-1
AMPLIMITE,RCPT ASY,POSTD,109,ZN,1



TE Part #2102353-4
CeeLok FAS-T, Plug Kit, ZnNi, A



TE Part #214796-E
EPSVA KS GDM3 EE 6 3,8 SN *
STROMVERSORG



TE Part #214363-E
ERMBGR BS GSEFB * LP60 GPAU
ERMET-BAUSAT

Documents



Product Drawings

MBXL R/A HDR 6P

English

CAD Files

Customer View Model

ENG_CVM_CVM_6450523-2_D2.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_6450523-2_D2.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_6450523-2_D2.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

POWER_CONNECTORS_CATALOG_SEC01_BOARD_TO_BOARD

English

2_PIECE_POWER_CONNECTORS_qrg_4-1773458-1

English

Product Specifications

Application Specification

English