



M8 Connector

TE Internal #: 3-2172091-2

Wire-to-Panel, 4 Position, Sealable, Wire & Cable, Signal, Panel Mount, Reverse Gender, Nickel, Zinc Alloy, M8 Connector, Standard Circular Connectors

[View on TE.com >](#)

Connectors > Circular Connectors > Standard Circular Connectors



Connector System: **Wire-to-Panel**
Connector Mounting Type: **Panel Mount**
Number of Positions: **4**
Sealable: **Yes**
Connector & Contact Terminates To: **Wire & Cable**

Features

Product Type Features

Connector System	Wire-to-Panel
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Circular Connector Type	Receptacle
Shell Type	Metal
Assembly Requirement	Factory Assembled
Circular Connector Shell Type	Metal-Shell
Connector Product Type	Connector Assembly
Assembly Type	Electrical Connector
Prewired	No

Mechanical Attachment

Connector Mounting Type	Panel Mount
Polarization Code	A
Mating Alignment Type	Keyed



Mating Retention	With
Panel Mount Feature	With
Mating Retention Type	Threaded
PCB Mount Retention	With
Panel Mount Feature Type	Screw Nut
Mating Alignment	With
PCB Mount Alignment	With

Configuration Features

Number of Positions	4
Number of Power Positions	0
Number of Signal Positions	4
Contacts Preloaded	Yes
Keying & Polarized Position Locations	A
Factory Installed Backshell	With

Contact Features

Contact Current Rating (Max)	3 A
Reverse Gender	Yes
Circular Connector Contact Type	Socket

Operation/Application

Circuit Application	Signal
Shielded	Yes

Body Features

Shell Plating Material	Nickel
Shell Base Material	Zinc Alloy
Circular Connector Insulation Material Type	Polyamide
Hermetically Sealed	Yes
O-Ring Material	Silicone Rubber
Environmental Protection	IP67
Environmental Protection Type	Sealed
Primary Product Color	Metalized Silver

Housing Features

Circular Connector Shell Size	12
-------------------------------	----



Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
IP Dust Sealing Level	6
IP Water Sealing Level	IP67

Other

EU RoHS Compliance	Compliant with Exemptions
EU ELV Compliance	Compliant

Electrical Characteristics

Operating Voltage	60 VAC
EMI & RFI Protection & Suppression Type	Shielding

Termination Features

Termination Method to Wire & Cable	Solder
------------------------------------	--------

Industry Standards

Compatible With Approved Standards Products	IEC
---	-----

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Pb (4% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these




limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # T4010019041-000
M8,SCREW, FEMALE,S,SHIELD,4P,
GOLD

Also in the Series | M8 Connector

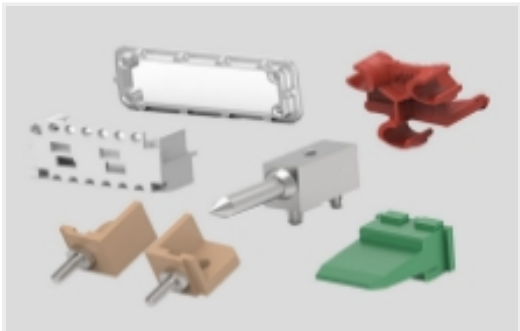

Connector Hardware(4)

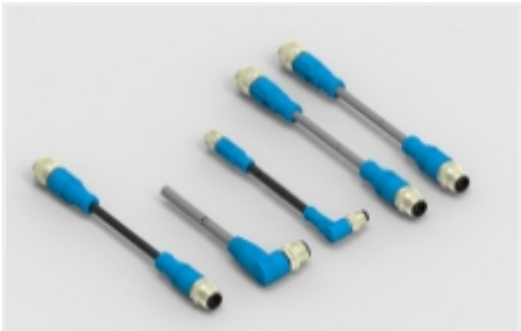

M8/M12 Cable Assemblies(147)



Standard Circular Connectors(106)


Customers Also Bought



TE Part #1462042-9
IMC06CGR=IM Relay 140mW 12V 1CO



TE Part #6-1415537-5
SR6A6K24




TE Part #T4041037041-000
M8.FMLE.PNLREAR.4POS.STR
PCBSHLD

TE Part #2-2172093-2
M8.MALE.PNLREAR.3POS.RA.
PCBSTND.SHLD






TE Part #2267078-5
[TMS3T5B2M2RE](#)

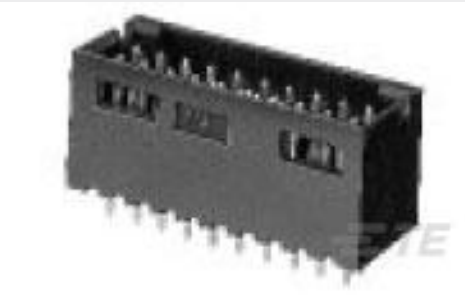

TE Part #6-103168-5
[34 MODII HDR DRST SHRD .100CL](#)



TE Part #2176329-5
[CRGP 1210 22R 1%](#)

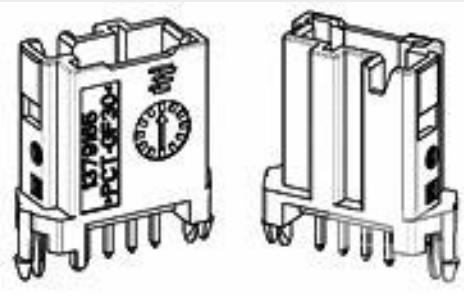

TE Part #1379165-7
[4pos MQS .63 header 180deg THR](#)



TE Part #3-1618389-7
[LEV100A4ANG=RELAY, 12Vdc SPST-NO](#)



TE Part #4-1419108-0
[RTE24005F](#)

Documents

Product Drawings

[M8.FMLE.PNLREAR.4POS.PCBSTAND.RA.SHLD](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_3-2172091-2_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-2172091-2_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-2172091-2_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[M8 / M12 Connector System Catalog](#)

English

Product Specifications

[Application Specification](#)

English