
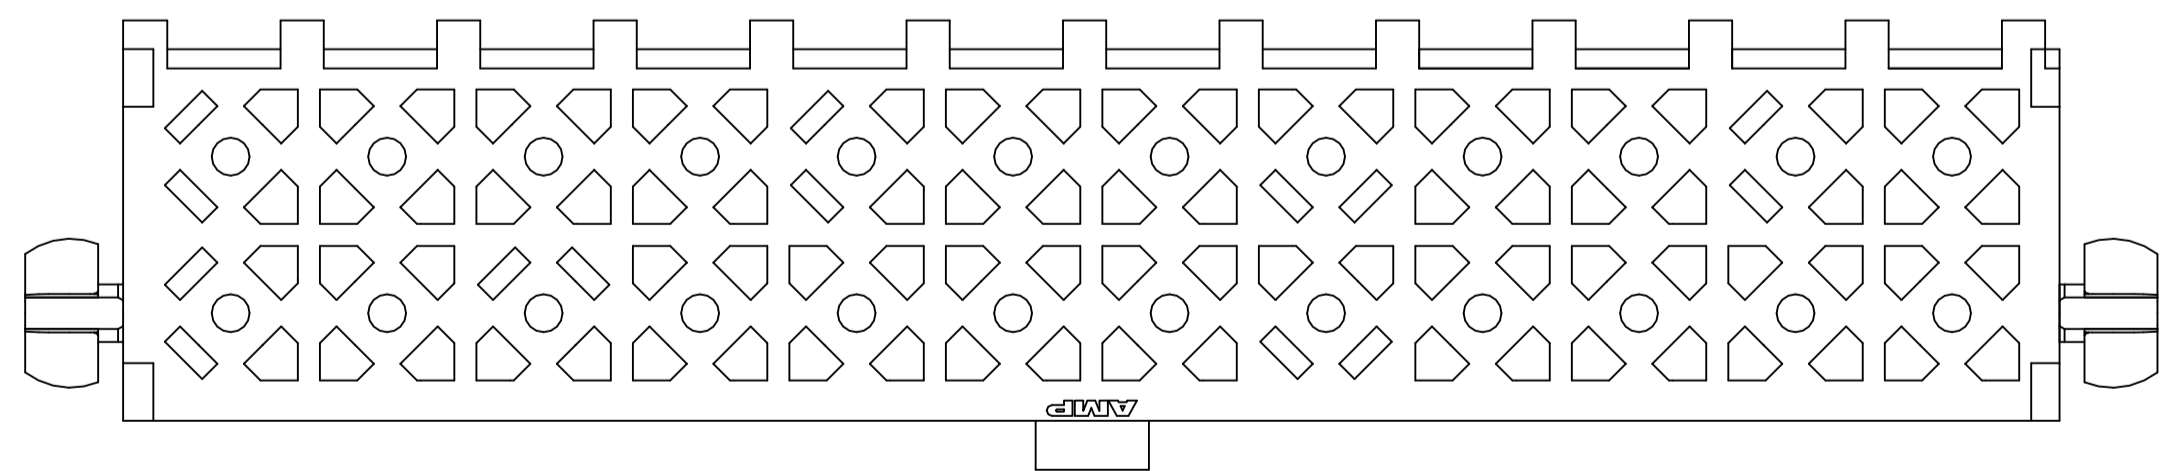
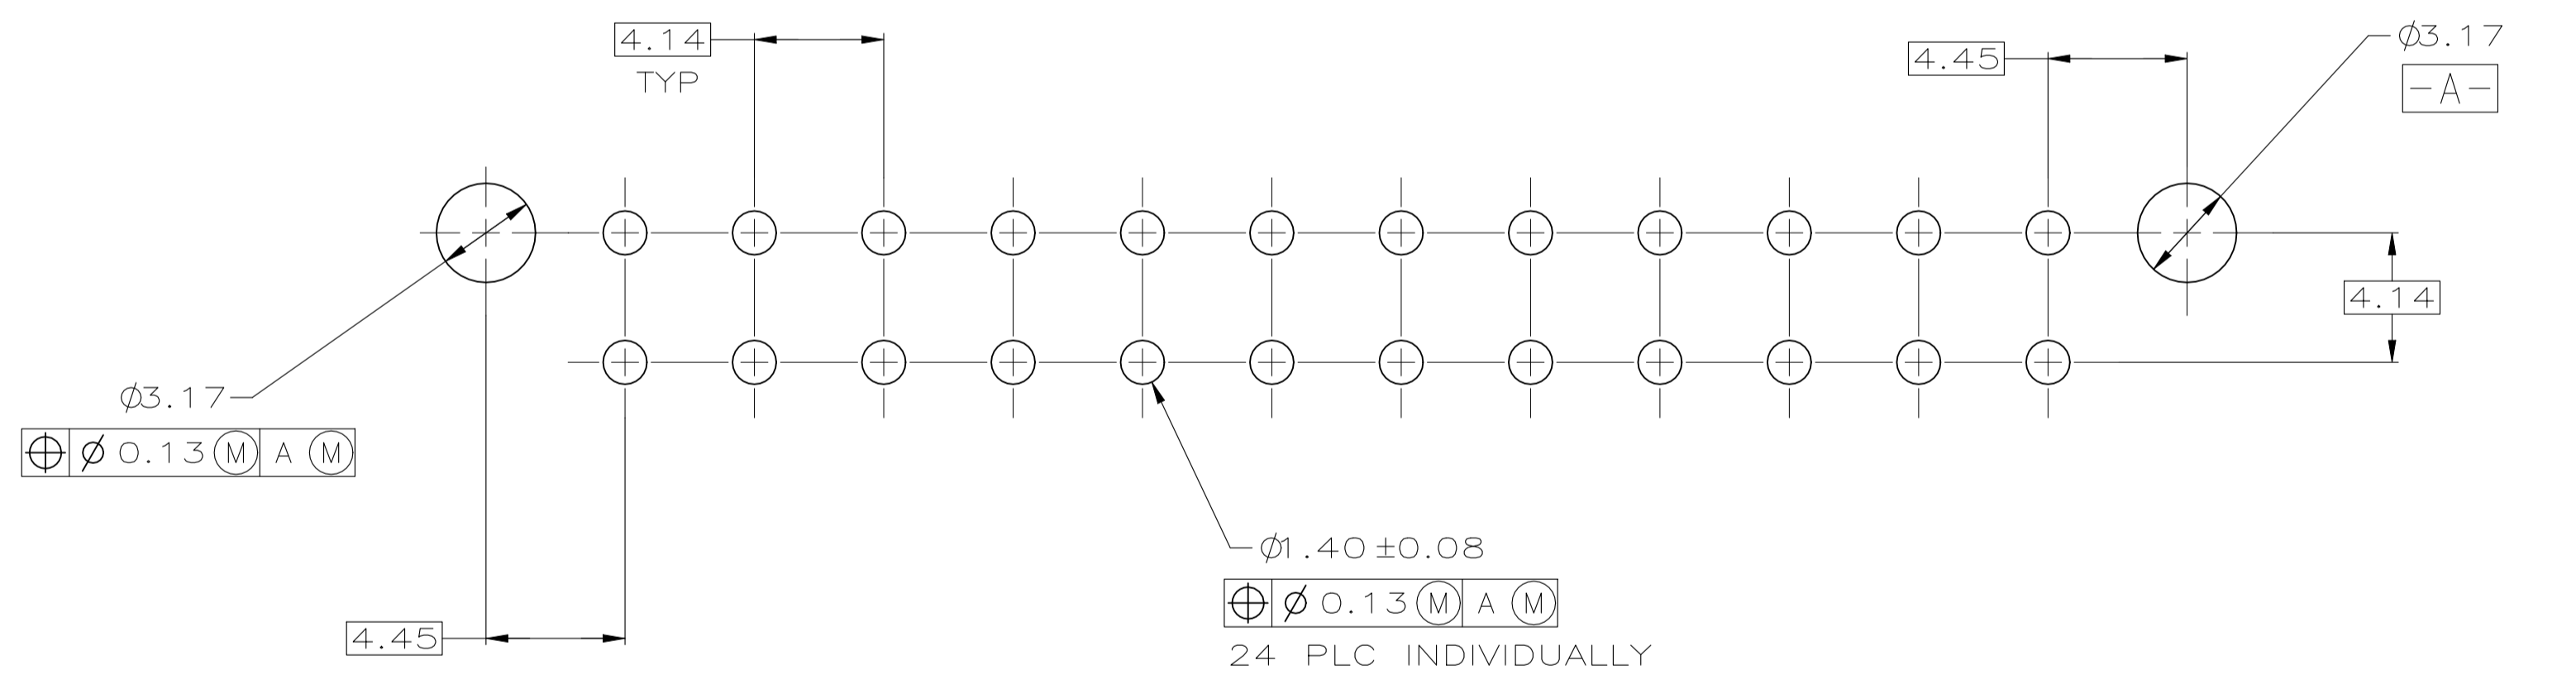
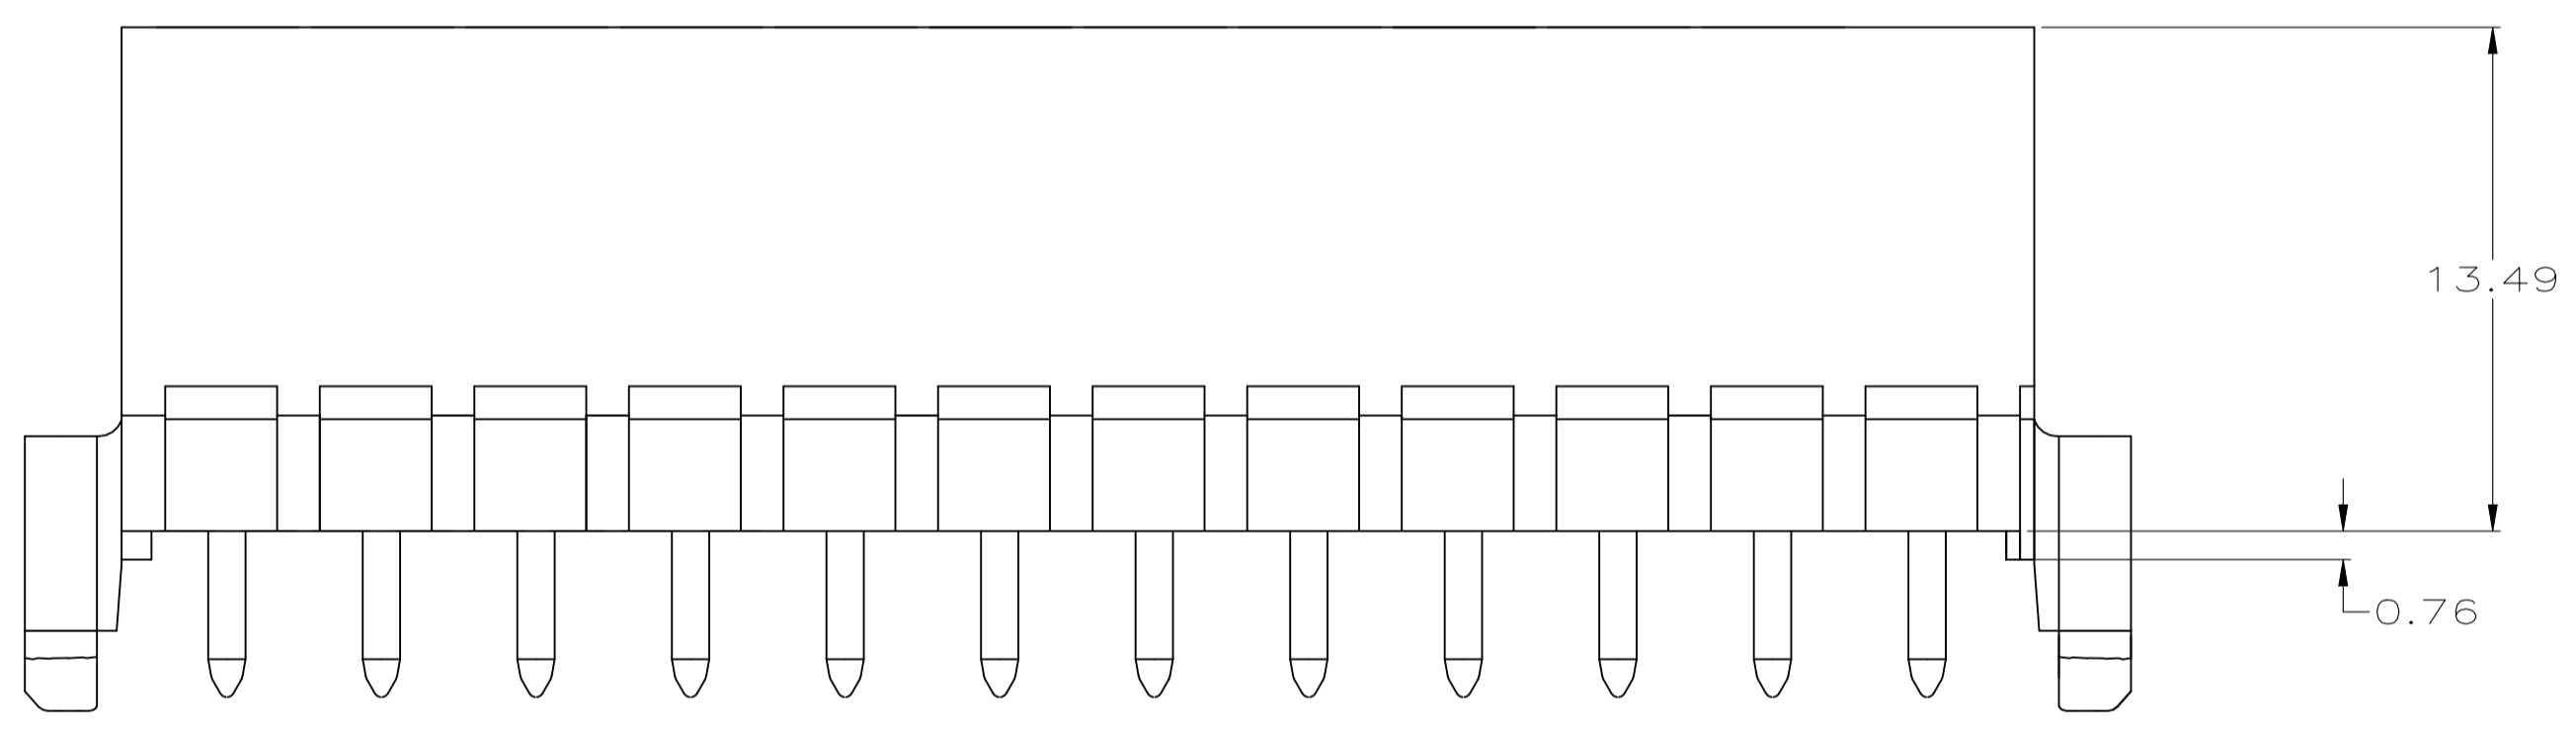
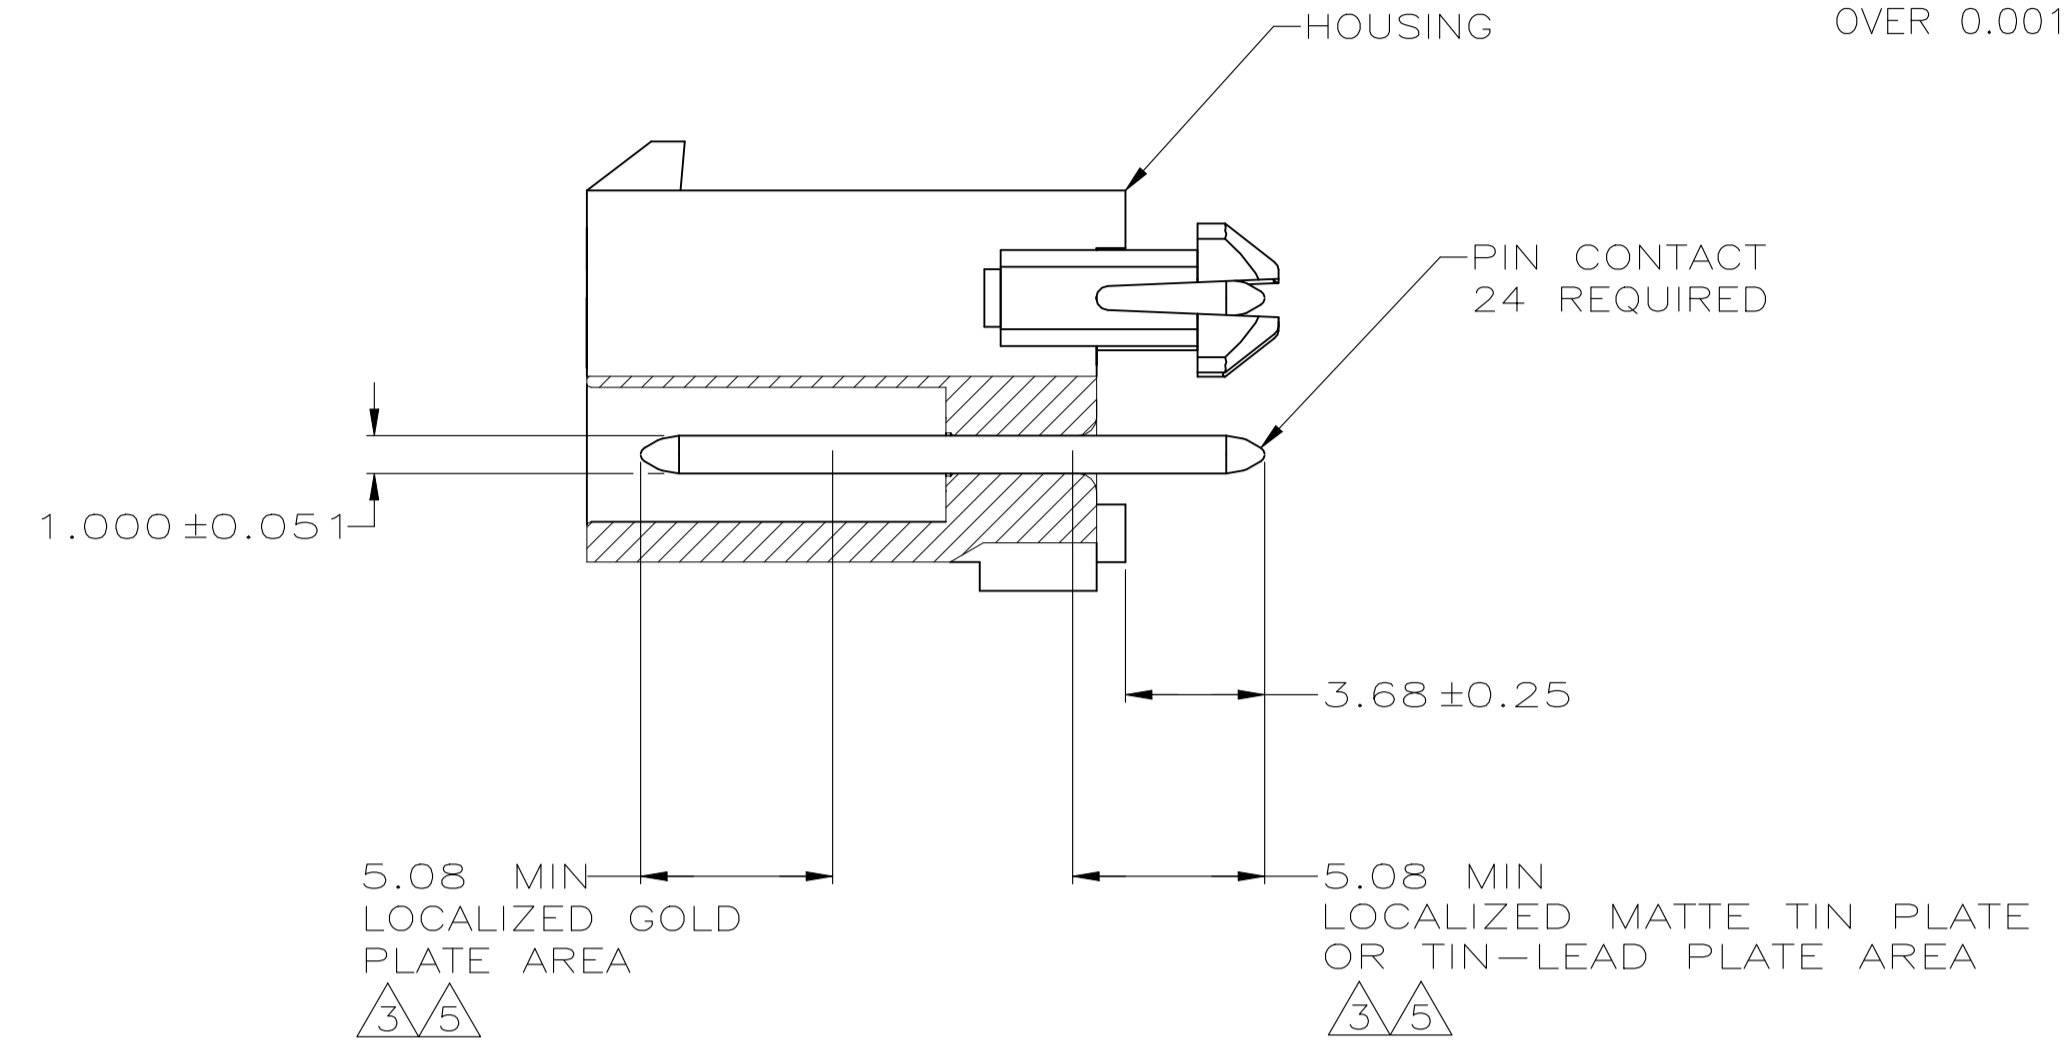


REVISIONS					
REV	DESCRIPTION	DATE	BY	APP'D	
F2	REVISED PER ECR-24-196907	17JUL2024	MV	JP	

- PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 108-11-3.
- 0.00381 MIN MATTE TIN LEAD OVER 0.00127 MIN NICKEL.
- 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.
- 0.00381 MIN MATTE TIN OVER 0.00127 MIN NICKEL.
- 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

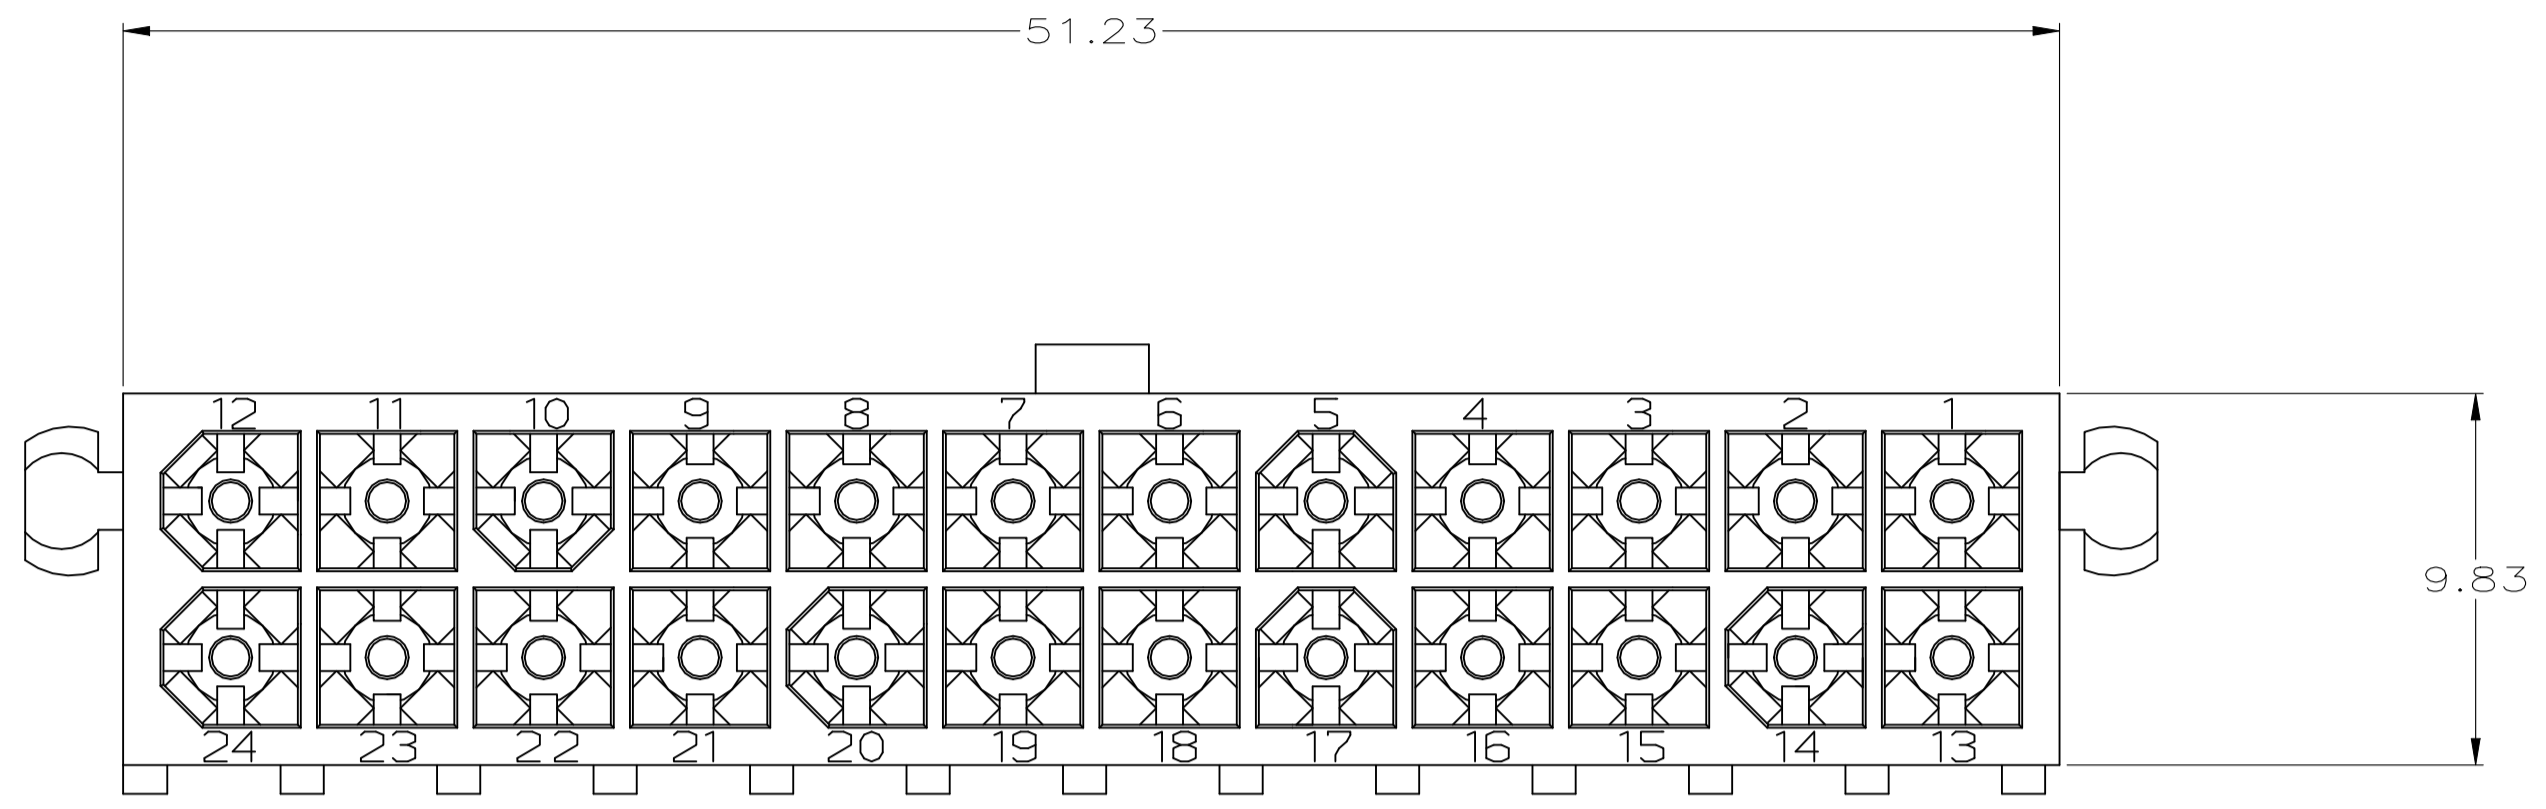

RECOMMENDED MOUNTING HOLE PATTERN FOR 1.57 THICK P.C. BOARD

	BRASS, GOLD	NYLON, 94V-0, WHITE	1-794072-1
	BRASS, TIN	NYLON, 94V-0, WHITE	1-794072-0
OBSOLETE	BRASS, GOLD	NYLON, 94V-0, WHITE	-794072-2-
SUPERSEDE WITH 1-794072-0	BRASS, TIN LEAD	NYLON, 94V-0, WHITE	-794072-1-
PIN CONTACT MATERIAL AND FINISH		HOUSING MATERIAL AND COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN S CARPENTER 07JUN05	TE Connectivity	
DIMENSIONS: mm		CHK R JONES 6/7/05	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP'D R JONES 6/7/05	PRODUCT SPEC	
0. PLC ± -		APPLICATION SPEC		
1. PLC ± -		SIZE		
2. PLC ± 0.13		CAGE CODE		
3. PLC ± -		DRAWING NO		
4. PLC ± -		WEIGHT		
ANGLES ± -		A1 00779 C=794072		
MATERIAL		CUSTOMER DRAWING		
FINISH		SCALE 5:1 SHEET 1 of 1 REV F2		