



FPC

TE Internal #: 1-1734248-5

1 mm [.039 in] Centerline, Zero Insertion Force (ZIF), Vertical, Surface Mount, Stuffer Actuator, Gold Flash, 15 Position, FPC Connectors

[View on TE.com >](#)

Connectors > PCB Connectors > Wire-to-Board Connectors > FFC, FPC & Ribbon Connectors > FPC Connectors



Centerline (Pitch): 1 mm [.039 in]

Mating Retention Type: Zero Insertion Force (ZIF)

PCB Mount Orientation: Vertical

Termination Method to PCB: Surface Mount

FPC Actuator Type: Stuffer

Features

Housing Features

Centerline (Pitch)	1 mm [.039 in]
Housing Material	PA 9T

Mechanical Attachment

Mating Retention Type	Zero Insertion Force (ZIF)
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Retention	With
PCB Mount Alignment	Without

Configuration Features

PCB Mount Orientation	Vertical
Number of Positions	15
Compatible With Wire & Cable Type	FFC, FPC
Number of Rows	1

Termination Features

Termination Method to PCB	Surface Mount
---------------------------	---------------

Product Type Features

FPC Actuator Type	Stuffer
PCB Connector Assembly Type	PCB Mount Receptacle



Connector & Contact Terminates To	Printed Circuit Board, Flexible Printed Circuit (FPC)
-----------------------------------	---

Connector Product Type	Connector Assembly
------------------------	--------------------

Connector System	Flex-to-Board
------------------	---------------

Contact Features

Contact Mating Area Plating Material	Gold Flash
--------------------------------------	------------

Contact Current Rating (Max)	1 A
------------------------------	-----

Contact Shape & Form	Single Beam
----------------------	-------------

PCB Contact Termination Area Plating Material Thickness	.025 μm [1 μin]
---	--

Contact Layout	Inline
----------------	--------

Contact Base Material	Phosphor Bronze
-----------------------	-----------------

PCB Contact Termination Area Plating Material	Gold
---	------

Contact Type	Socket
--------------	--------

Contact Mating Area Plating Material Thickness	.025 μm [1 μin]
--	--

Other

EU RoHS Compliance	Compliant
--------------------	-----------

Electrical Characteristics

Operating Voltage	125 VDC
-------------------	---------

Body Features

Primary Product Color	Black
-----------------------	-------

Dimensions

Connector Width	4.6 mm[.181 in]
-----------------	-----------------

Accepts Flex Cable Thickness	.3 mm[.012 in]
------------------------------	----------------

Connector Height	7.7 mm[.303 in]
------------------	-----------------

Connector Length	22.4 mm[.882 in]
------------------	------------------

Usage Conditions

Operating Temperature Range	-20 – 85 $^{\circ}\text{C}$ [-4 – 185 $^{\circ}\text{F}$]
-----------------------------	--

Operation/Application

Circuit Application	Signal
---------------------	--------

Identification Marking

Circuit Identification Feature	Without
--------------------------------	---------

Packaging Features



Packaging Method	Tape
Packaging Quantity	1000

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Out of Scope
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Customers Also Bought



TE Part #4-1462037-6
IM06JR=IM RELAY 140mW 12V



TE Part #1-5103311-0
A/L LOW PRO HDR 50P RA BLACK



TE Part #4-641210-2
12P MTA156 HDR FLRA FB 30AU LF




TE Part #4-641208-2
12P MTA156 HDR ASSY FL ST LF




TE Part #1734248-9
1.0 FPC, ZIF V/T, SMT, 9P



TE Part #10184000-01
Sleep Tracking Sensor

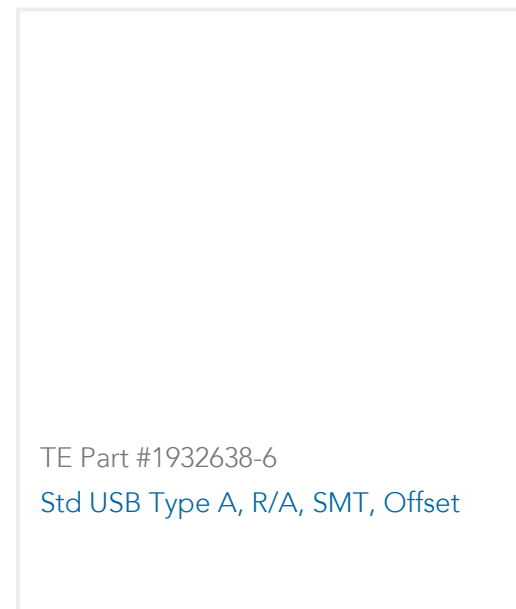

TE Part #1932638-6
Std USB Type A, R/A, SMT, Offset

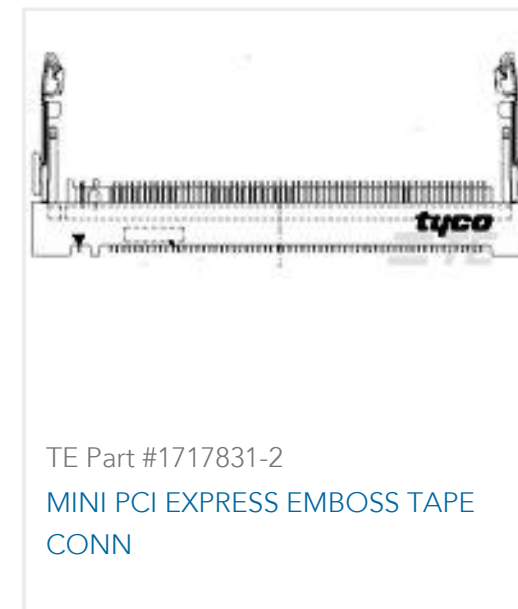

TE Part #1717831-2
MINI PCI EXPRESS EMBOSS TAPE
CONN

Documents

Product Drawings

1.0 FPC, ZIF V/T, SMT, 15P

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1-1734248-5_E_c-1-1734248-5-e.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-1734248-5_E_c-1-1734248-5-e.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-1734248-5_E_c-1-1734248-5-e.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

FPC Connector Family

English

[1-1773959-7-FPC-Connectors-CN](#)

English

Product Specifications

Product Specification

English

1-1734248-5

1 mm [.039 in] Centerline, Zero Insertion Force (ZIF), Vertical, Surface Mount, Stuffer
Actuator, Gold Flash, 15 Position, FPC Connectors

