
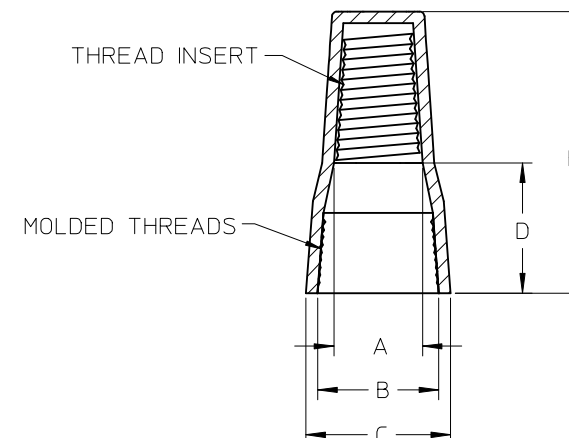



	10		9		8		7		6		5		4		3		2		19160			
	MATERIAL NUMBER	ENGINEERING NUMBER	COLOR	WIRE RANGE	WIRE RANGE MIN.	WIRE RANGE MAX.		VOLTAGE MAX.	DIM A	DIM B	DIM C	DIM D	DIM E									
F	191600039	TL-G	GREY	22-14	2#22	1#14 & 1#20		300	.15/3.8	.26/6.6	.34/8.6	.23/5.8	.60/15.2									
	191600040	TL-B	BLUE	22-14	2#22	3#16		300	.16/4.1	.28/7.1	.39/9.9	.23/5.8	.69/17.5									
	191600041	TL-O	ORANGE	22-14	1#18 & 1#20	4#16 & 1#20		600*	.20/5.1	.39/9.9	.48/12.2	.31/7.9	.87/22.1									
	191600042	TL-Y	YELLOW	22-10	3#20	1#10 & 2#14 & 1#16		600*	.24/6.1	.44/11.2	.55/13.97	.31/7.9	.95/24.1									
	191600043	TL-R	RED	22-8	3#18	3#10		600*	.30/7.6	.51/12.9	.65/16.5	.36/9.1	1.04/26.4									
																						F



SECTION D-D
SCALE 2:1

REF NOTES:

- 1.) WORKING TEMP. 105°C
- 2.) HOUSING MATERIAL: UL 94V-2
FLAME RETARDANT THERMOPLASTIC
- 3.) * = 1000V MAX. IN LIGHTING FIXTURES AND SIGNS.
- 4.) MOLEX UL FILE NO.: E32244
- 5.) MOLEX CSA FILE NO.: 700095

CHANGED TITLE EC NO: IPG2015-1469 DRWN: GJOJAS01 2015/02/18 CHKD: JMACNEIL 2015/02/18 APPR: JMACNEIL 2015/03/06	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 1:1	DESIGN UNITS INCH		THIRD ANGLE PROJECTION	REVISE ON CAD ONLY				
				mm	INCH	DIMENSION STYLE IN/MM		TITLE TWIST LOCK SPLICE SCREW-ON TYPE 					
		 -0	4 PLACES	± ---	± ---	DRAWN BY	DATE				 MOLEX INCORPORATED		
		 -0	3 PLACES	± ---	± ---	B.RUPERT	11/07/03						
			2 PLACES	± ---	± .02	CHECKED BY	DATE	SHEET NO. 1 OF 1					
			1 PLACE	± 0.5	± ---	J.PAWLIC	11/08/03						
				ANGULAR ± 1 °		APPROVED BY	DATE	MATERIAL NO.	DOCUMENT NO.				
				DRAFT WHERE APPLICABLE		R.DEROSS	11/09/03	SEE CHART	SD-19160-005				
				MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							