
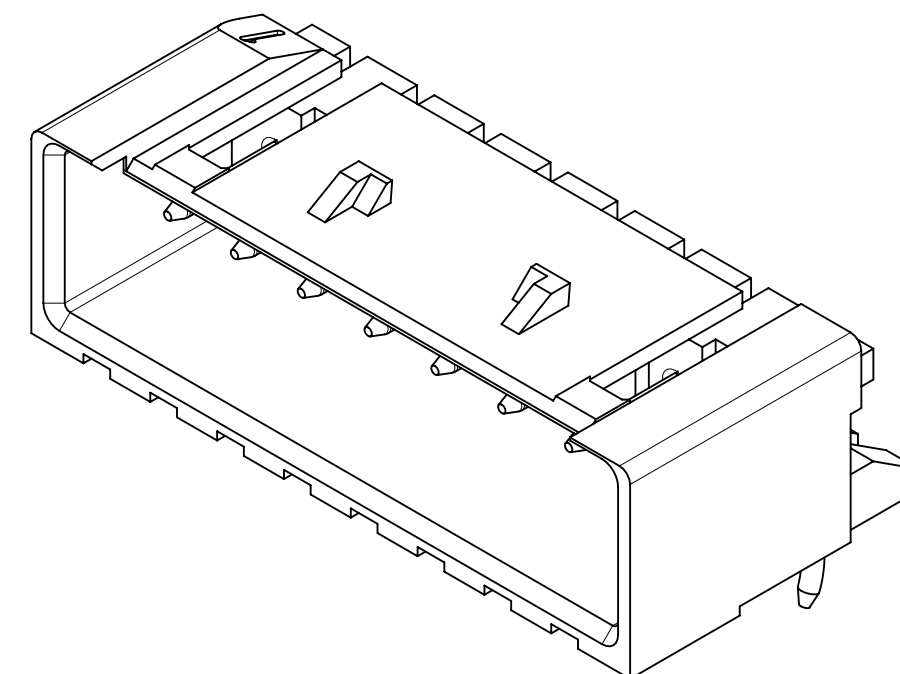
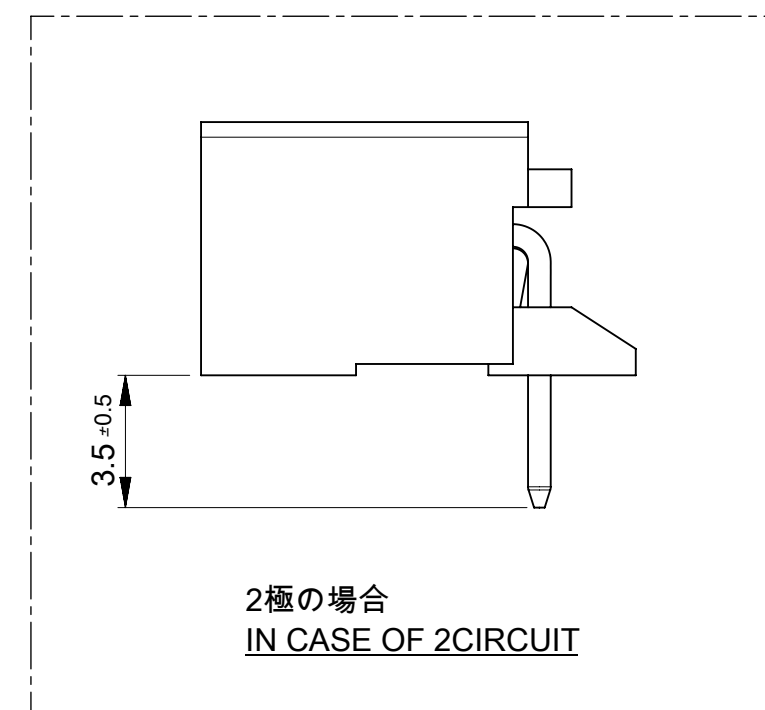
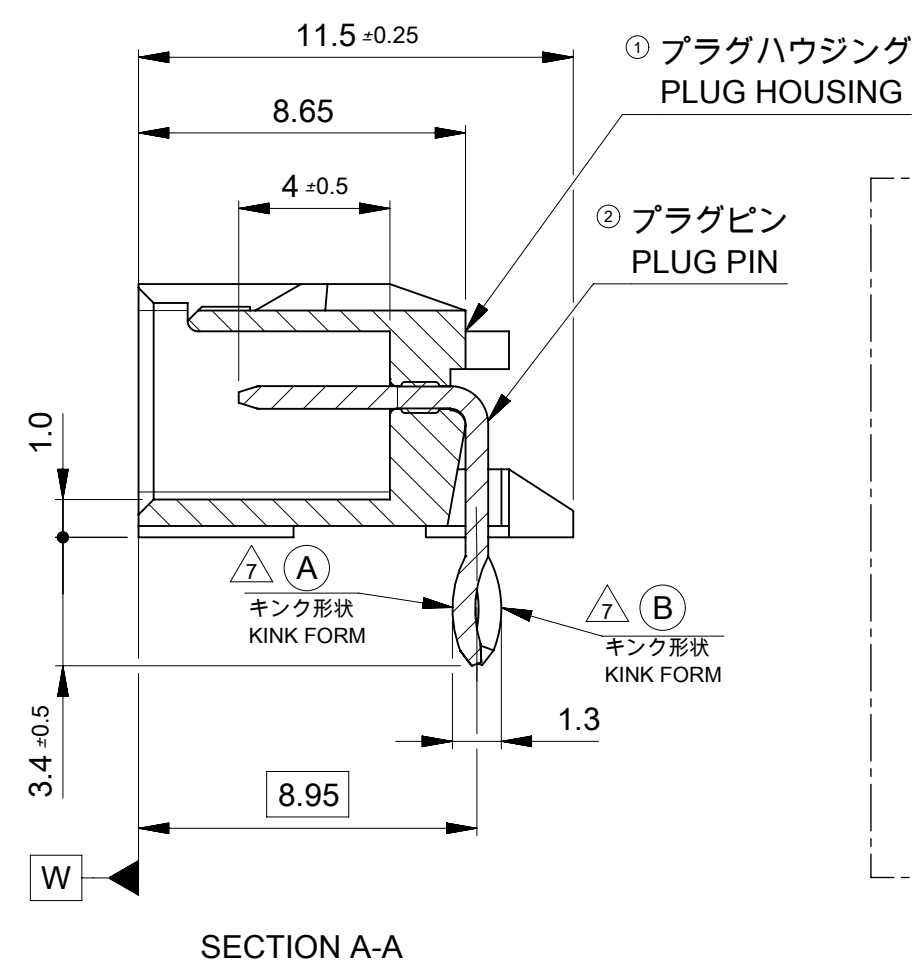
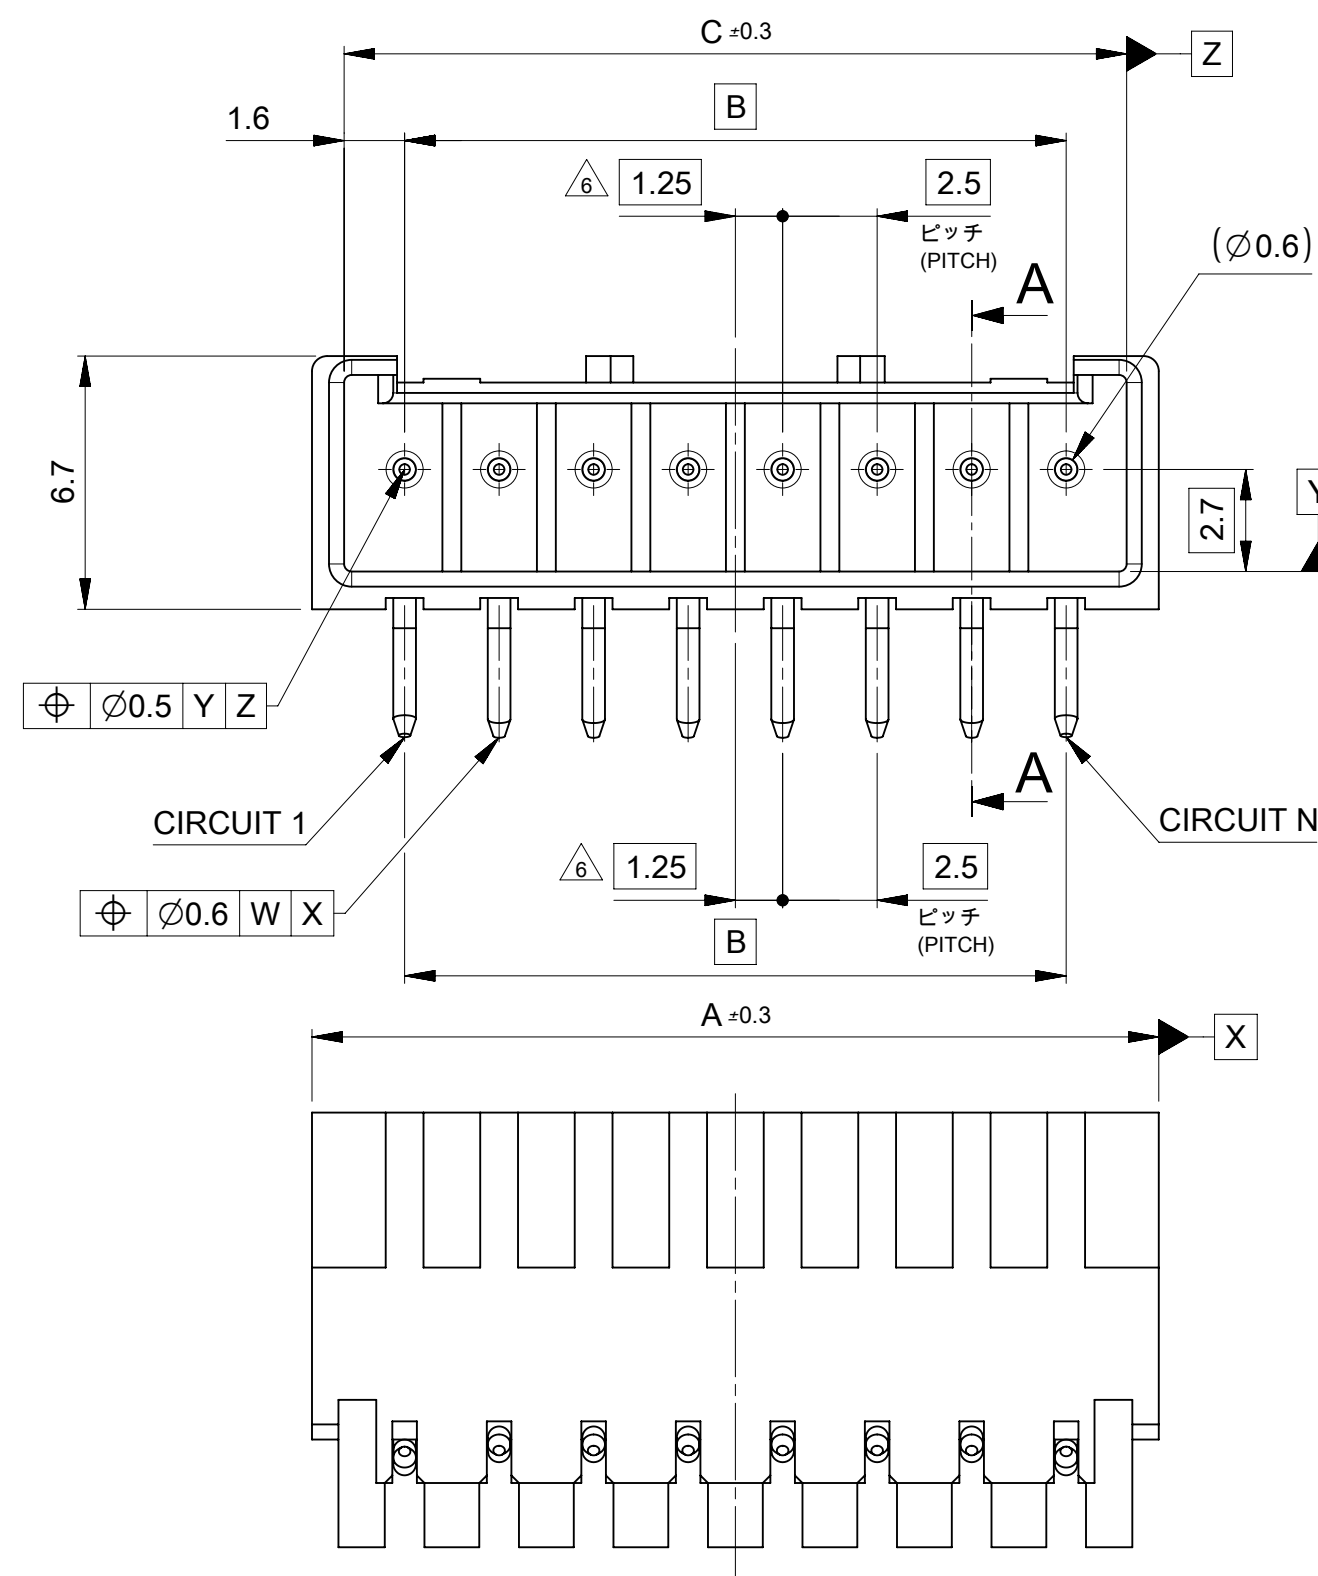


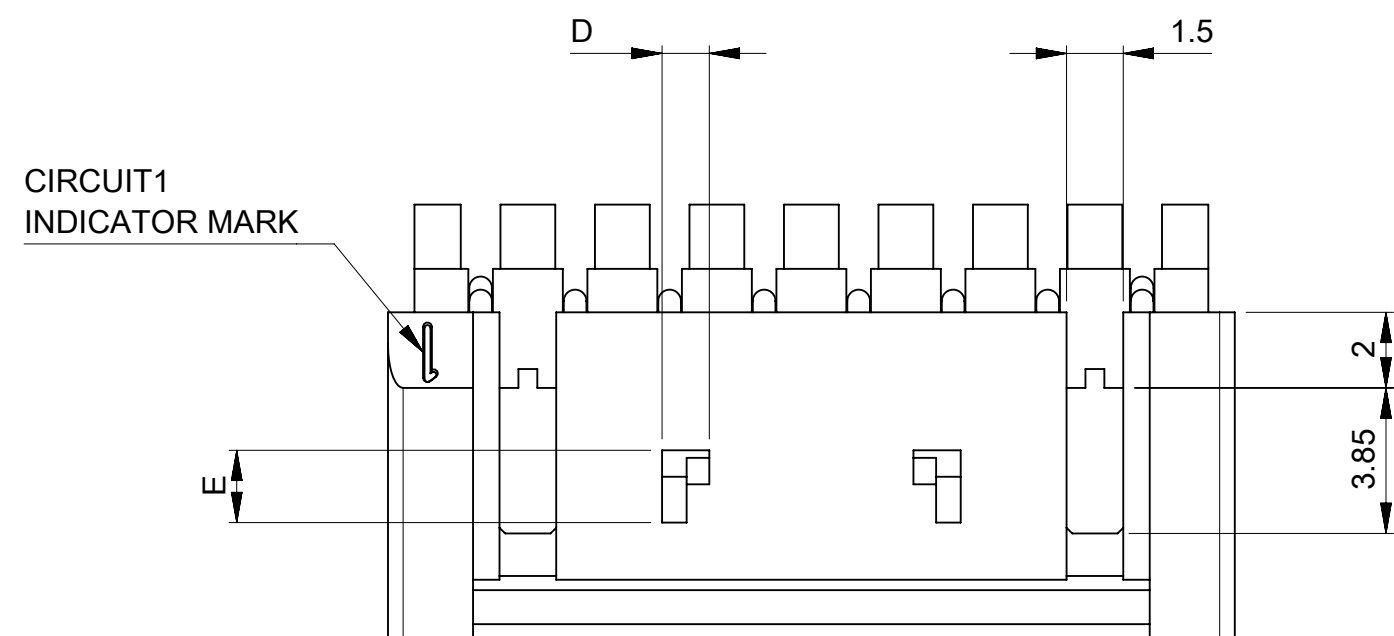


NOTES


- ① 材料及び仕上げ(めっき仕様) : TABLE 1参照
MATERIAL AND FINISHES : SEE TABLE 1
2. 製品仕様書 : 511630000-PS 000
PRODUCT SPECIFICATION:511630000-PS 000
3. 梱包仕様書 : SPK-53426-002 001
PACKAGING SPECIFICATION: SPK-53426-002 001
4. 嵌合相手 : 51163 シリーズ
MATES WITH:51163 SERIES
5. アプリケーション仕様書(コネクタ取扱い説明書) : 2166940000-AS PS 000
APPLICATION SPECIFICATION(CONNECTOR MANUAL) : 2166940000-AS PS 000
- ⑥ 偶数極に適合
APPLY FOR EVEN CIRCUIT
- ⑦ 2極はキンクを付加しない
3極以上のキンク形状は両サイドが (B)、その他の極は全て (A) 形状とする
KINK FORM
2 CIRCUIT:PINS TO BE NOT KINKED.
MORE THAN 2 CIRCUIT:PINS AT BOTH ENDS ARE KINK FORMED TO (B),
THE OTHER PINS ARE KINK FORMED TO (A).
8. GLOW WIRE TEST 準拠品
THIS PRODUCT IS GLOW WIRE TEST COMPATIBLE.

1.9	1.25	38.2	35	39.9	534269150	15
		35.7	32.5	37.4	534269140	14
		33.2	30	34.9	534269130	13
		30.7	27.5	32.4	534269120	12
		28.2	25	29.9	534269110	11
		25.7	22.5	27.4	534269100	10
		23.2	20	24.9	534269090	9
		20.7	17.5	22.4	534269080	8
		18.2	15	19.9	534269070	7
		15.7	12.5	17.4	534269060	6
	13.2	10	14.9	534269050	5	
	10.7	7.5	12.4	534269040	4	
	1	8.2	5	9.9	534269030	3
-	-	5.7	2.5	7.4	534269020	2
E	D	C	B	A	発注番号 ORDER No.	極数 CIRCUIT SIZE
					梱包形態：トレイ PACKAGE:TRAY	


1 TABLE 1

部品 PART		材料 MATERIAL				
A	① プラグハウジング PLUG HOUSING	ポリアミド ガラス含有 UL94 V-0 色 : ナチュラル(白) POLYAMIDE(PA),GLASS FILLED,UL94 V-0,COLOR:NATURAL(WHITE)				
	② プラグピン PLUG PIN	りん青銅 PHOSPHOR BRONZE				
		錫めっき : 1.0MICRO METER MINIMUM. MATTE TIN PLATING : 1.0MICRO METER MINIMUM.				
		銅めっき(下地めっき):0.5MICRO METER MINIMUM COPPER PLATING(UNDER PLATING):0.5MICRO METER MINIMUM.				
DOCUMENT STATUS		P1	RELEASE DATE	2020/11/20	05:18:32	


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
DIMENSION UNITS		SCALE		CURRENT REV DESC: EC NO: 649584 DRWN: RWATANABE01 2020/11/18 CHK'D: AIDA 2020/11/20 APPR: SAKIYAMA 2020/11/20 INITIAL REVISION: DRWN: RWATANABE01 2020/11/18 APPR: SAKIYAMA 2020/11/20			molex										
mm							NTS		MINI-LOCK 2.5 W/B SINGLE ROW RIGHT ANGLE PLUG ASSEMBLY								
GENERAL TOLERANCES (UNLESS SPECIFIED)																	
ANGULAR TOL ± 3.0 °																	
4 PLACES		± 0.2															
3 PLACES		± 0.2															
2 PLACES		± 0.2		PRODUCT CUSTOMER DRAWING													
1 PLACE		± 0.2															
0 PLACES		± 0.2															
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION 		DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
						A2-SIZE		53426		534260000-SD		PSD		001		A	
						MATERIAL NUMBER		CUSTOMER		SHEET NUMBER							
						GENERAL						1 OF 2					




2CIRCUIT



3CIRCUIT




4CIRCUIT




5~15CIRCUIT


ロック形状図
LOCK CONFIGURATION

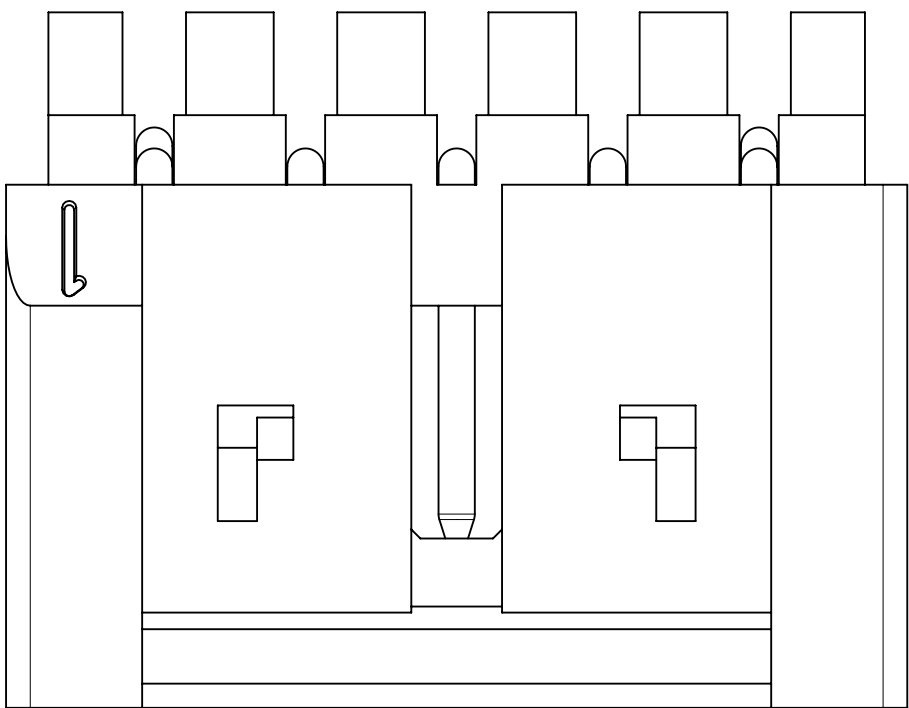

製品レイアウト
PRODUCT LAYOUT

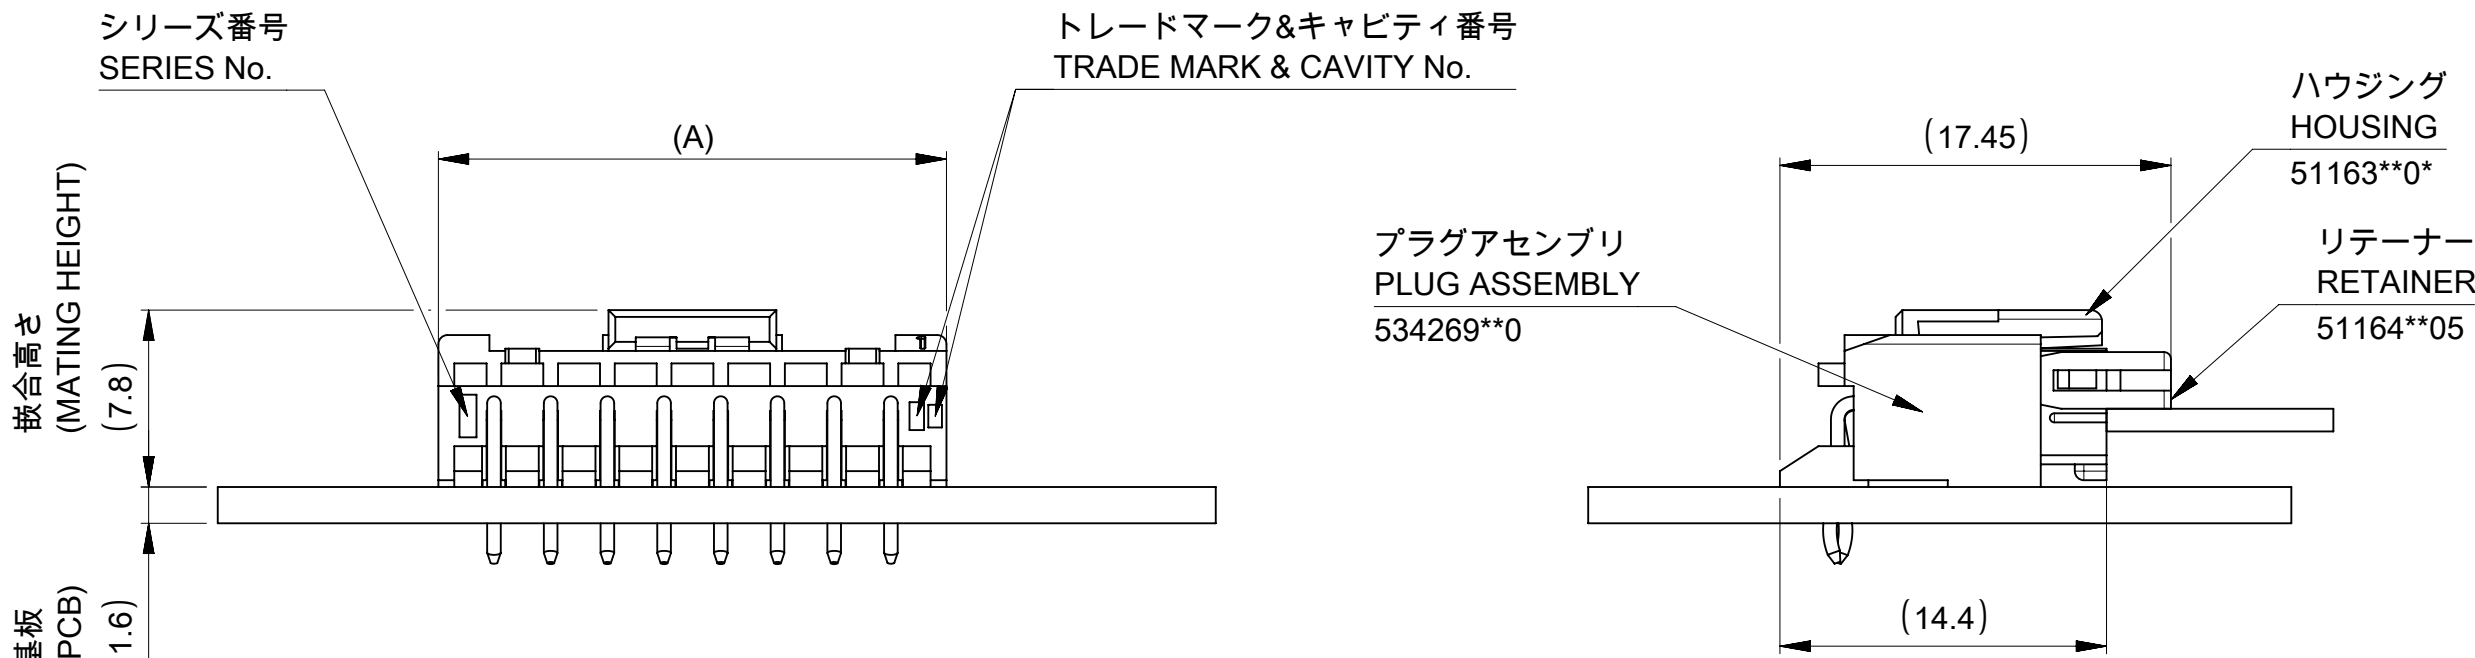

嵌合図
MATED CONNECTORS

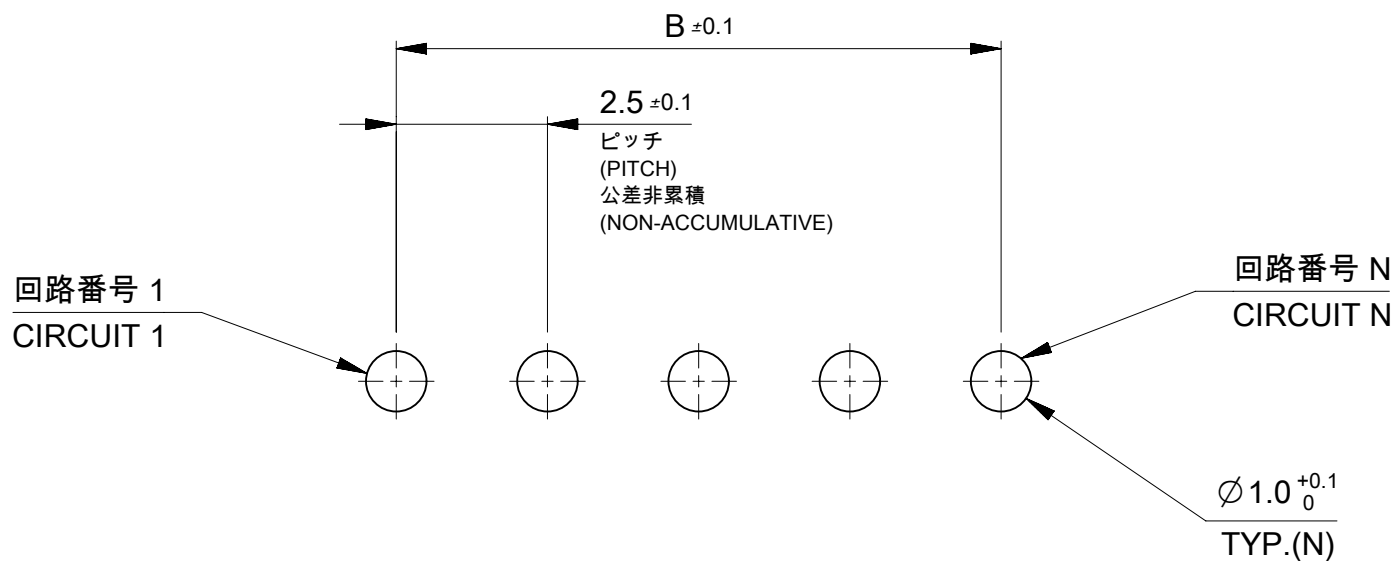

基板取付穴推奨寸法(マウント面)
RECOMMENDED PCB HOLE DIMENSION
(MOUNTING SIDE),(t=1.6)

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex				
mm		NTS										
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 649584 DRWN: RWATANABE01 2020/11/18 CHK'D: AIDA 2020/11/20 APPR: SAKIYAMA 2020/11/20 INITIAL REVISION: DRWN: RWATANABE01 2020/11/18 APPR: SAKIYAMA 2020/11/20				MINI-LOCK 2.5 W/B SINGLE ROW RIGHT ANGLE PLUG ASSEMBLY				
ANGULAR TOL ± 3.0 °								PRODUCT CUSTOMER DRAWING				
4 PLACES		± 0.2						DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
3 PLACES		± 0.2						534260000-SD		PSD	001	A
2 PLACES		± 0.2										
1 PLACE		± 0.2										
0 PLACES		± 0.2										
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER		
						A2-SIZE	53426		GENERAL	2 OF 2		

DOCUMENT STATUS	P1	RELEASE DATE	2020/11/20	05:18:32
-----------------	----	--------------	------------	----------