

104481-8 ✓ ACTIVE

AMPMODU | AMPMODU IV/V


TE Internal #: 104481-8

Socket Contact, Gold, 300 VAC, Discrete Wire, 32 – 28 AWG Wire Size, .03 – .09 mm<sup>2</sup> Wire Size, 59.2 – 177.62 CMA Wire Size, Crimp, AMPMODU IV/V

[View on TE.com >](#)



Connectors > Contacts > Connector Contacts

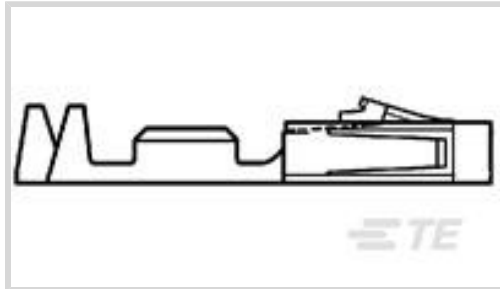

Contact Type: **Socket**

Contact Mating Area Plating Material: **Gold**

Operating Voltage: **300 VAC**

Compatible With Wire & Cable Type: **Discrete Wire**

Wire Size: **32 – 28 AWG**

## Features

### Industry Standards

Compatible With Approved Standards Products	UL E28476, CSA LR7189
---	-----------------------

### Product Type Features

Applied Pressure	Standard
------------------	----------

### Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

### Packaging Features

Packaging Method	Loose Piece
------------------	-------------

Packaging Quantity	500
--------------------	-----

### Dimensions

Compatible Insulation Diameter Range	.64 – 1.52 mm [.025 – .06 in]
--------------------------------------	-------------------------------

Wire Size	59.2 – 177.62 CMA
-----------	-------------------

### Electrical Characteristics

Termination Resistance	12 mΩ
------------------------	-------

Dielectric Withstanding Voltage (Max)	750 V
---------------------------------------	-------

Insulation Resistance	5000 MΩ
-----------------------	---------

Operating Voltage	300 VAC
-------------------	---------

### Contact Features



Mating Square Post Dimension	.64 mm[.025 in]
Contact Type	Socket
Contact Mating Area Plating Material	Gold
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	3 A

### Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

### Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

### Usage Conditions

Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
-----------------------------	----------------------------

### Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

### Other

EU RoHS Compliance	Not Compliant
EU ELV Compliance	Not Compliant

## Product Compliance


[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Pb (13% in Component Part) <b>Article Safe Usage Statements:</b> Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability







Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts

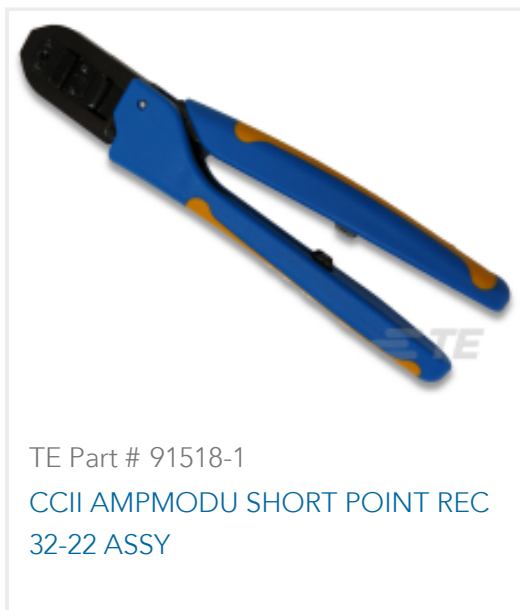

### Also in the Series | AMPMODU IV/V

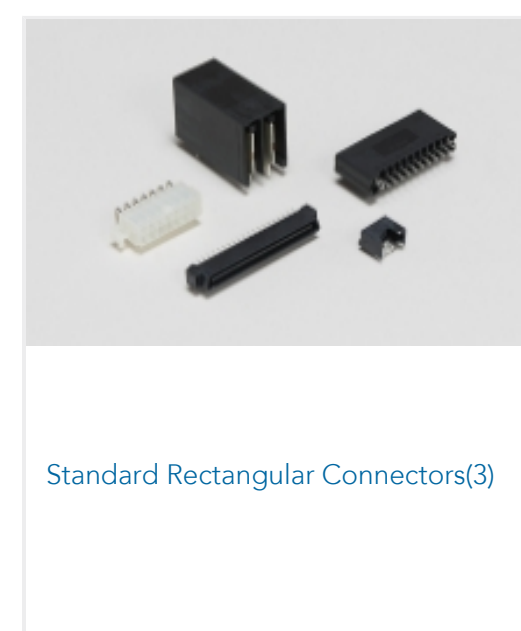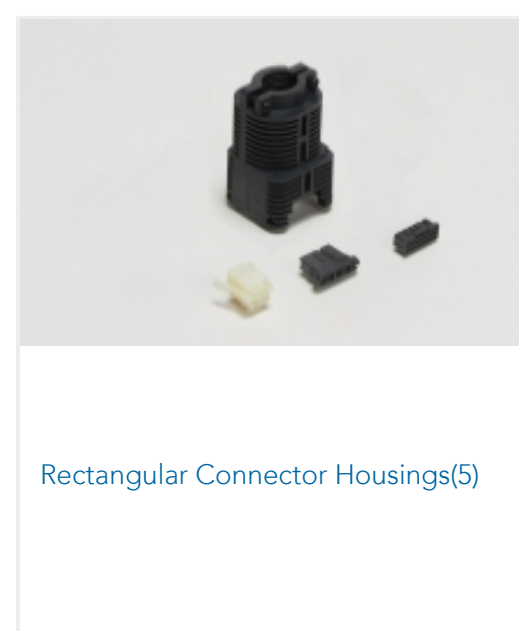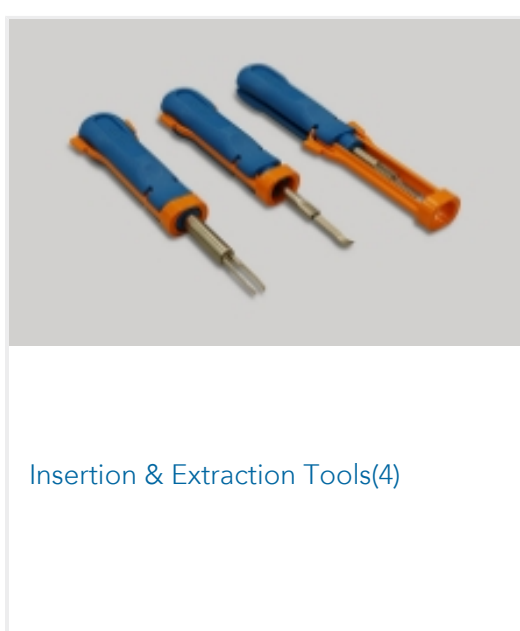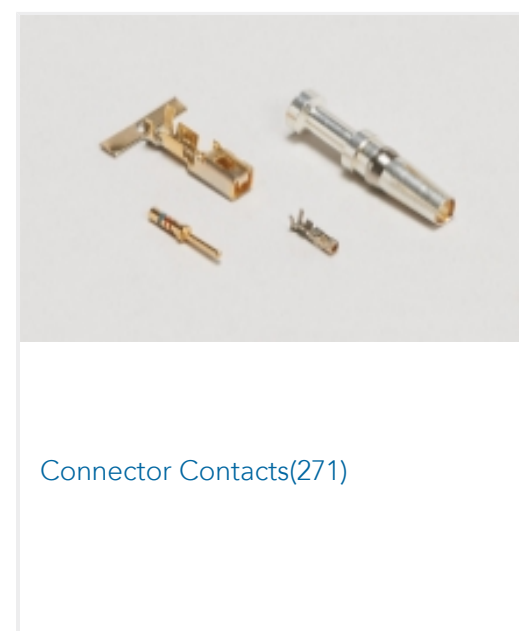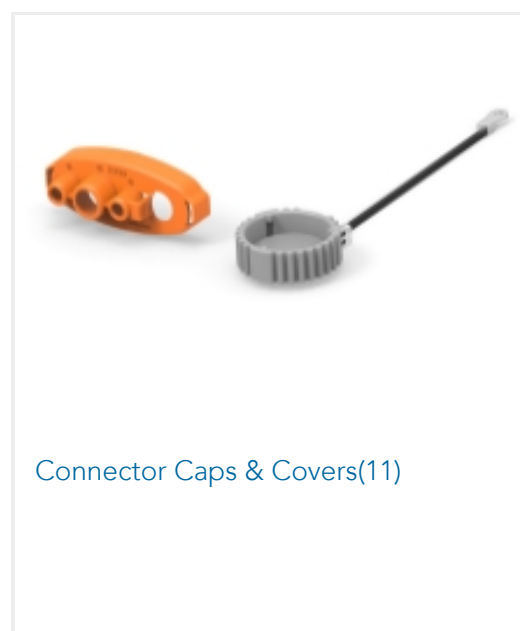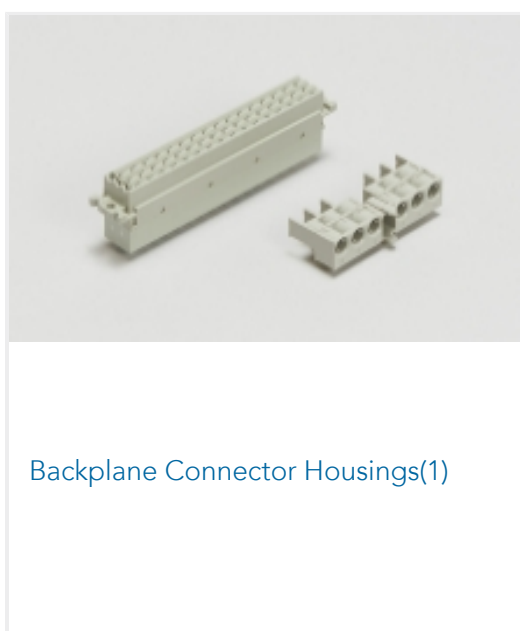



Wire-to-Board Connector Assemblies  
& Housings(394)

## Customers Also Bought



TE Part #926887-1  
UNIV.M-N-L.PIN



TE Part #2-350375-0  
MR SPLT GROMET .296 DIA BLK LF



TE Part #ANT-W63WS1-SMA  
Antenna Blade Wifi6/6E Swivel SMA




TE Part #CSJ-SGFB-200-MHF4  
SMA to MHF4 200mm 0.81 OD



TE Part #C96433-000  
NT-MIL-1/4-0-SP



TE Part #E2100407ATM  
E2100407ATM=RELAY

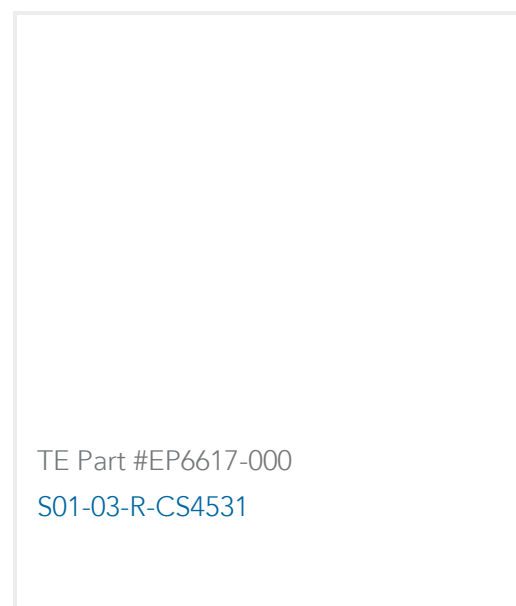

TE Part #EP6617-000  
S01-03-R-CS4531



TE Part #EG5594-000  
R85049/140-09BC-CS4095

## Documents

### Product Drawings

[SHORT POINT RECP CONT LP](#)

English

### CAD Files

Customer View Model

[ENG\\_CVM\\_104481-8\\_N.2d\\_dxf.zip](#)

English

[3D PDF](#)

English

Customer View Model

[ENG\\_CVM\\_104481-8\\_N.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_104481-8\\_N.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

104481-8

Socket Contact, Gold, 300 VAC, Discrete Wire, 32 – 28 AWG Wire Size, .03 – .09 mm<sup>2</sup>  
Wire Size, 59.2 – 177.62 CMA Wire Size, Crimp, AMPMODU IV/V



---

[Product Specifications](#)

[Application Specification](#)

English