

1735042-8 ✓ ACTIVE



## FPC

TE Internal #: 1735042-8

1 mm [.039 in] Centerline, Non ZIF, Vertical, Surface Mount, Tin, 8

Position, FPC Connectors

[View on TE.com >](#)

Connectors > PCB Connectors > Wire-to-Board Connectors > FFC, FPC & Ribbon Connectors > FPC Connectors



Centerline (Pitch): 1 mm [.039 in]

Mating Retention Type: **Non ZIF**

PCB Mount Orientation: **Vertical**

Termination Method to PCB: **Surface Mount**

Contact Mating Area Plating Material: **Tin**

## Features

### Housing Features

|                    |                |
|--------------------|----------------|
| Centerline (Pitch) | 1 mm [.039 in] |
| Housing Material   | Nylon GF       |

### Mechanical Attachment

|                         |             |
|-------------------------|-------------|
| Mating Retention Type   | Non ZIF     |
| Connector Mounting Type | Board Mount |
| PCB Mount Retention     | Without     |
| Mating Alignment        | With        |
| PCB Mount Alignment     | Without     |

### Configuration Features

|                                   |          |
|-----------------------------------|----------|
| PCB Mount Orientation             | Vertical |
| Number of Positions               | 8        |
| Compatible With Wire & Cable Type | FFC, FPC |
| Number of Rows                    | 1        |

### Termination Features

|  |  |
|--|--|
|  |  |
|--|--|

|                           |               |
|---------------------------|---------------|
| Termination Method to PCB | Surface Mount |
|---------------------------|---------------|

### Contact Features

|   |                  |
|---|------------------|
| Contact Mating Area Plating Material                    | Tin              |
| PCB Contact Termination Area Plating Material Finish    | Matte            |
| Contact Mating Area Plating Material Thickness          | 1 µm[39.37 µin]  |
| Contact Current Rating (Max)                            | 1 A              |
| PCB Contact Termination Area Plating Material Thickness | 1 µm[39.37 µin]  |
| Contact Shape & Form                                    | Single Beam      |
| Contact Layout  | Staggered Type A |
| Contact Base Material                                   | Phosphor Bronze  |
| PCB Contact Termination Area Plating Material           | Tin              |
| Contact Type  | Socket           |
| Contact Mating Area Plating Material Finish             | Matte            |

### Other

|                    |           |
|--------------------|-----------|
| EU RoHS Compliance | Compliant |
| EU ELV Compliance  | Compliant |

### Product Type Features

|                                   |                                |
|-----------------------------------|--------------------------------|
| Connector & Contact Terminates To | Flexible Printed Circuit (FPC) |
| Connector Product Type            | Connector Assembly             |
| Connector System                  | Flex-to-Board                  |
| PCB Connector Assembly Type       | PCB Mount Receptacle           |

### Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 125 VAC |
|-------------------|---------|

### Body Features

|                       |         |
|-----------------------|---------|
| Primary Product Color | Natural |
|-----------------------|---------|

### Dimensions

|                              |                |
|------------------------------|----------------|
| Accepts Flex Cable Thickness | .3 mm[.012 in] |
| Connector Width              | 4 mm[.157 in]  |
| Connector Height             | 5.6 mm[.22 in] |
| Connector Length             | 9 mm[.393 in]  |

### Usage Conditions

|                             |                          |
|-----------------------------|--------------------------|
| Operating Temperature Range | -20 – 85 °C[-4 – 185 °F] |
|-----------------------------|--------------------------|

### Operation/Application

|                     |        |
|---------------------|--------|
| Circuit Application | Signal |
|---------------------|--------|

### Identification Marking

|                                |      |
|--------------------------------|------|
| Circuit Identification Feature | With |
|--------------------------------|------|

### Packaging Features

|                    |             |
|--------------------|-------------|
| Packaging Quantity | 800         |
| Packaging Method   | Tape & Reel |

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

|   |   |
|---|---|
| EU RoHS Directive 2011/65/EU                  | Compliant   |
| EU ELV Directive 2000/53/EC                   | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JUNE 2024 (241)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.  |
| Solder Process Capability                     | Reflow solder capable to 245°C  |



#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts



## Customers Also Bought

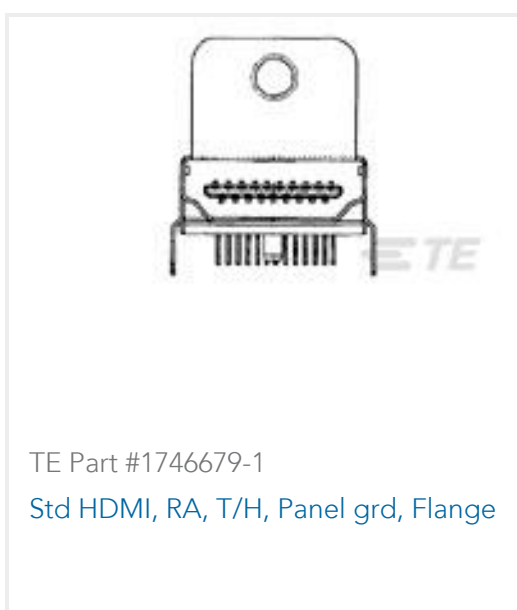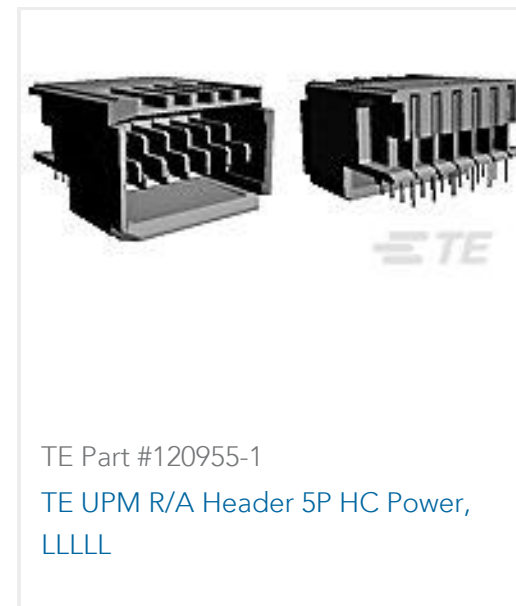

## Documents

### Product Drawings

1MM FFC SMT V ASSY 8P EMBOSS

English

### CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1735042-8\_M.2d\_dxf.zip



English

Customer View Model

[ENG\\_CVM\\_CVM\\_1735042-8\\_M.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1735042-8\\_M.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

### Datasheets & Catalog Pages

[1-1773959-7-FPC-Connectors-CN](#)

English

---

### Product Specifications

[Product Specification](#)

English