

()

()





Amphenol
FCI

()

© 2016 APCI

()

D

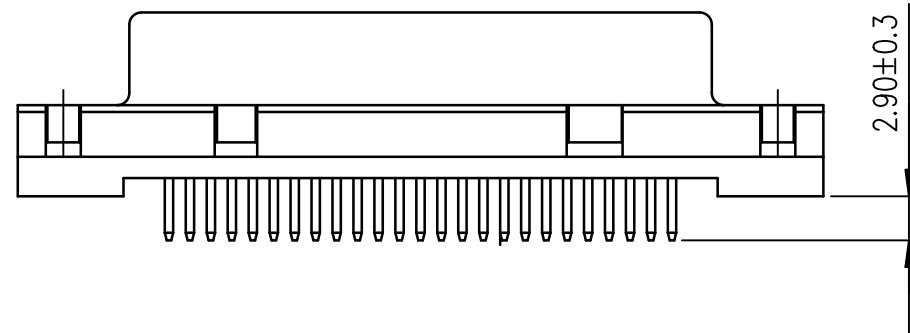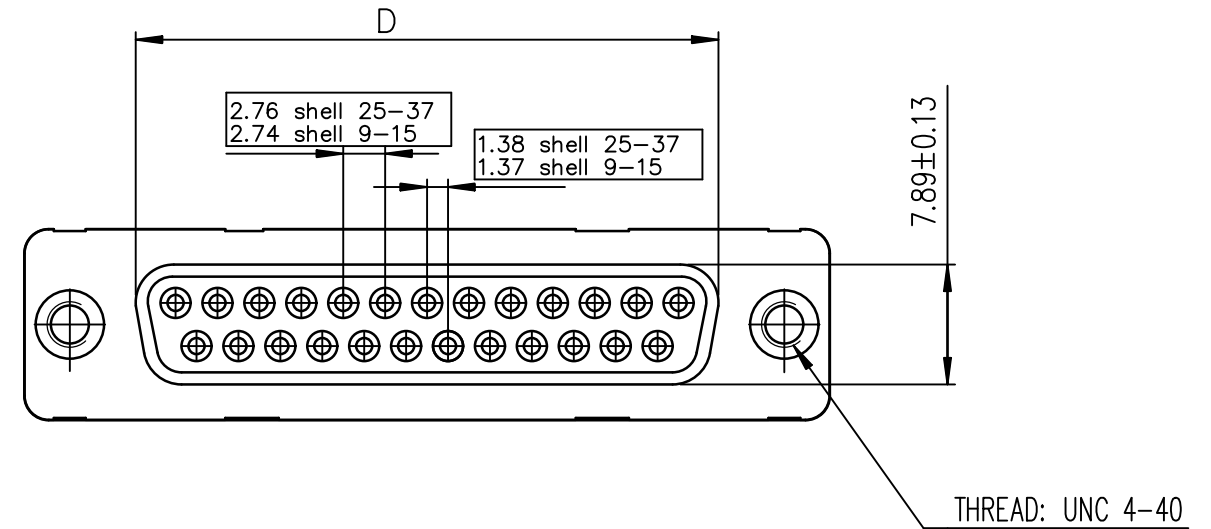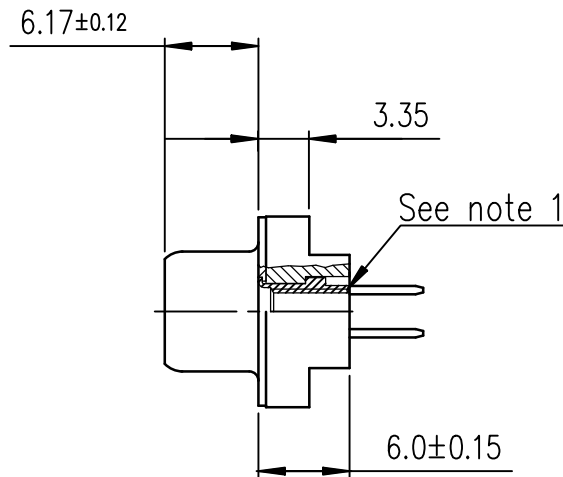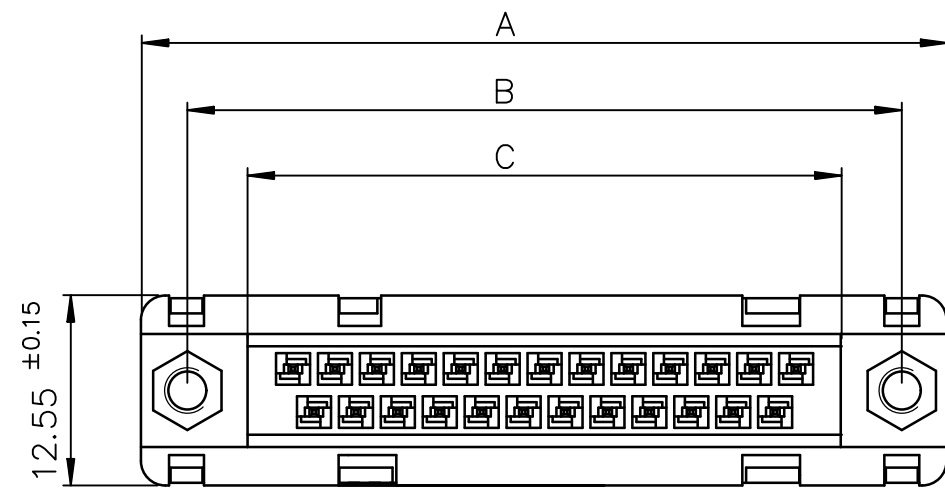


PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S24A.PX00LF
15	39.14	33.32	25.18	24.54	19.18	D15S24A.PX00LF
25	53.03	47.04	39.12	38.25	33.12	D25S24A.PX00LF
37	69.32	63.50	55.68	54.71	49.68	D37S24A.PX00LF

4 - 200 MATING CYCLES
6 - 500 MATING CYCLES

PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

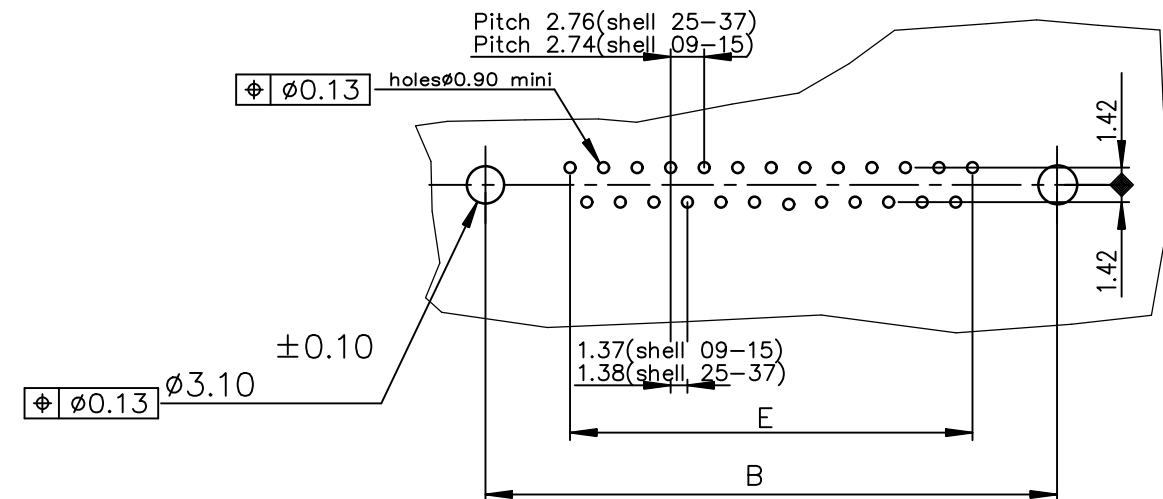

Notes:

1) The nut can protrude above the surface of insulator but maintaining the footprint dimension 6.0±0.15 mm.

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

mat'l. code SEE NOTES				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection MM	product family D-SUB											
ltr	ecn no	dr	date	tolerances unless otherwise specified		MM	title FEMALE CONNECTOR STD EUROPE STRAIGHT SOLDER TYPE FOR PCB 1.6mm											
F	ELX-I-281390	AB	2026-03-10	angles	linear													
				0°±2°														
				dr	JOUBERT	1996-09-10	Amphenol FCI											
				enr	GREGAR M	2026-03-10												
				chr	GREGAR M	2026-03-10												
				app	ALEX BABU	2026-03-10												
sheet index	revision	F																
	sheet	1																