


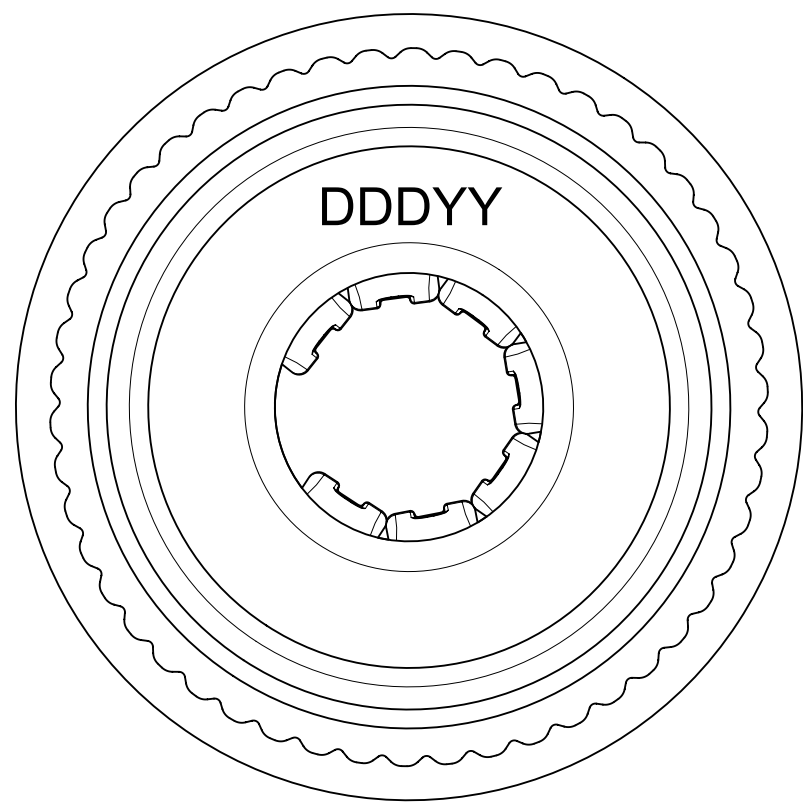
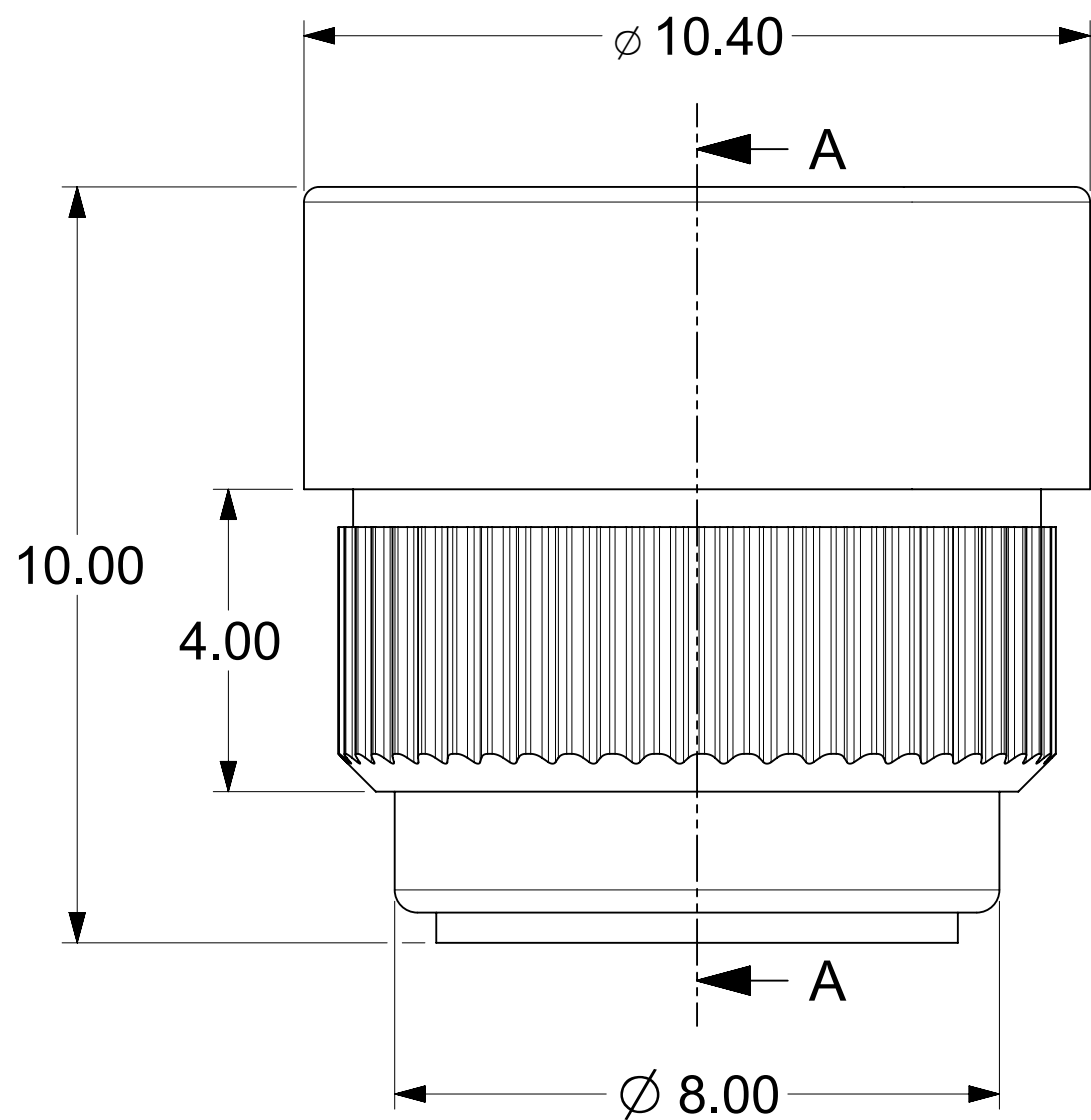
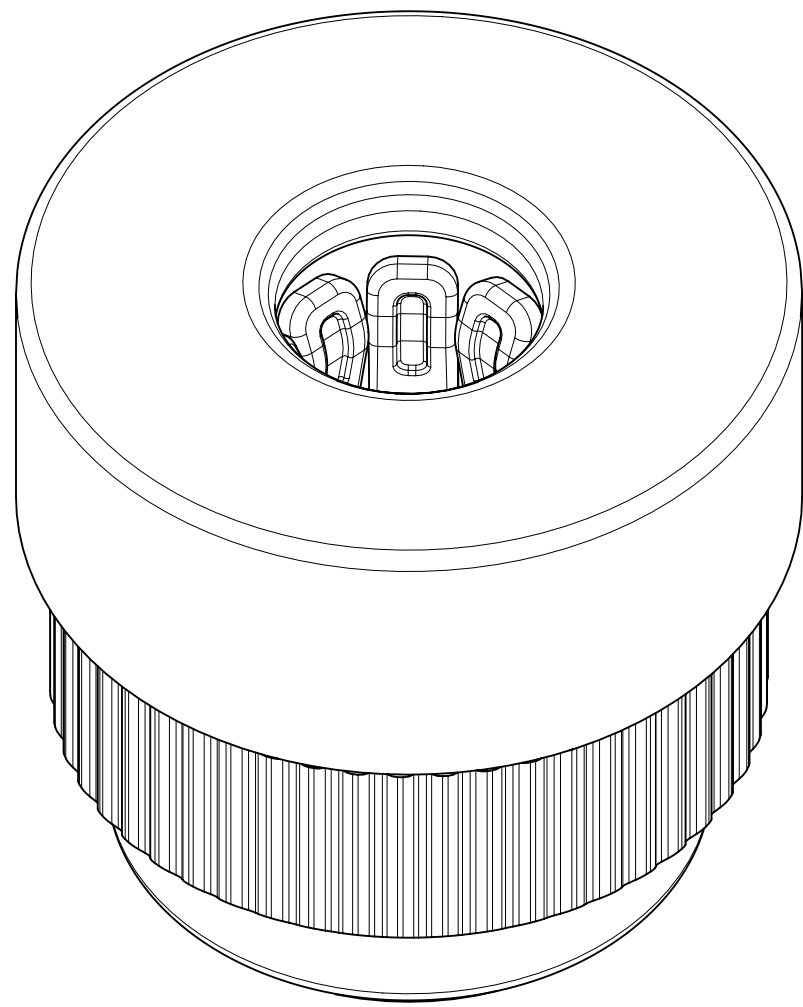


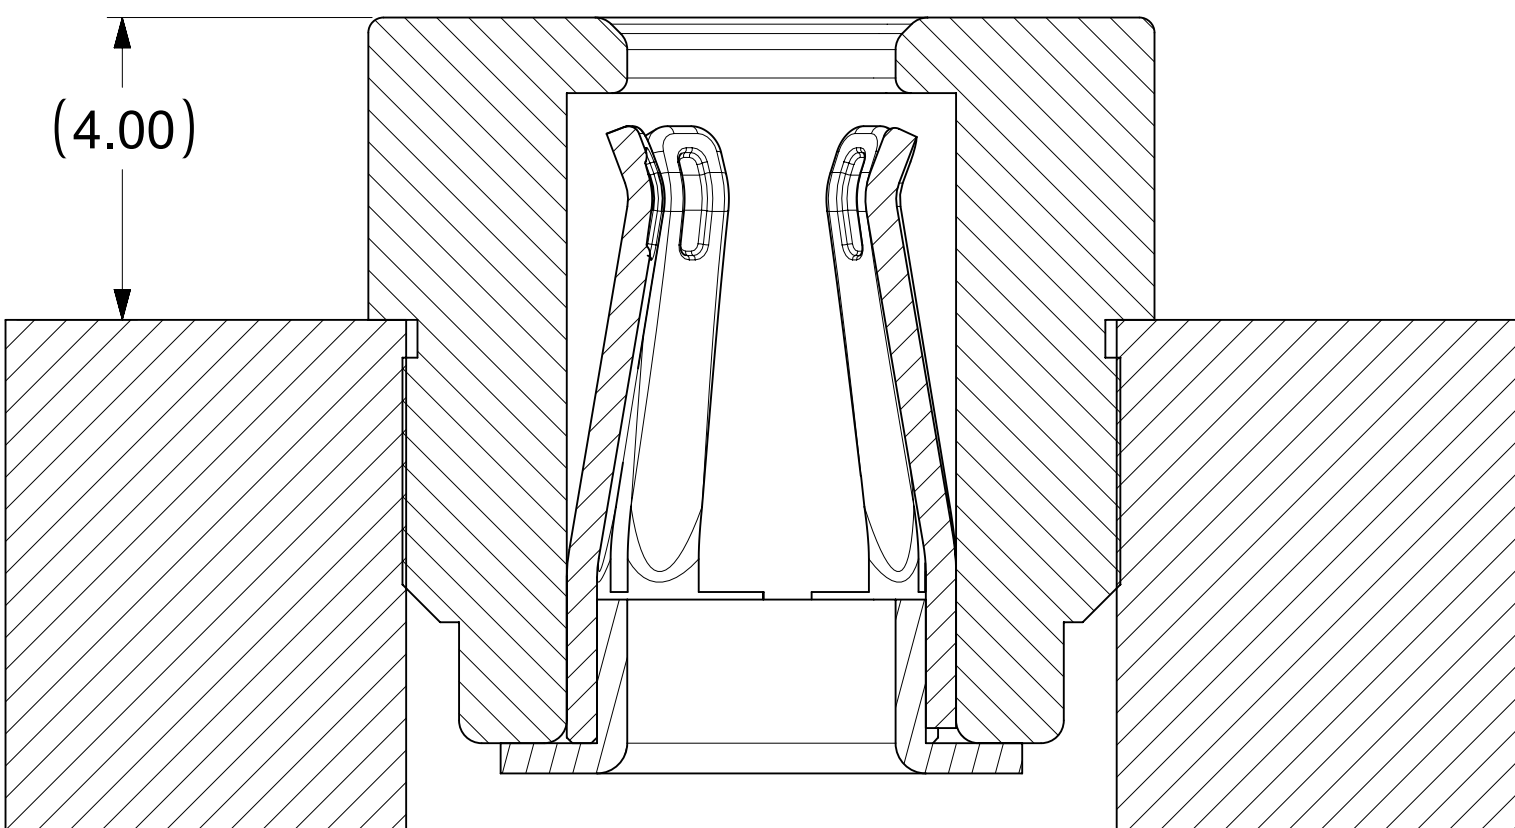

RECOMMENDED DRILL (ON BUSBAR)

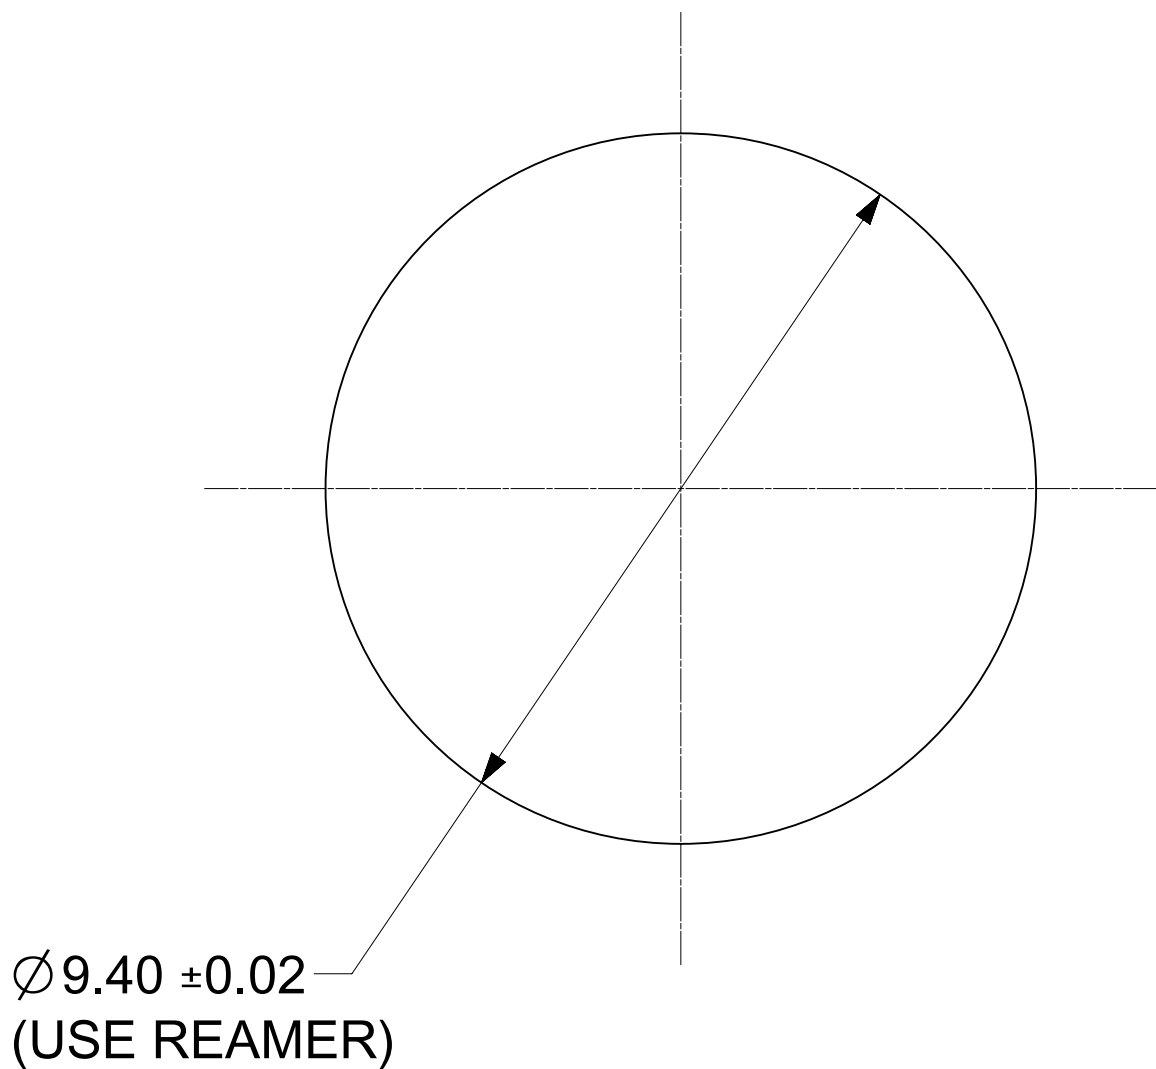

SECTION A-A

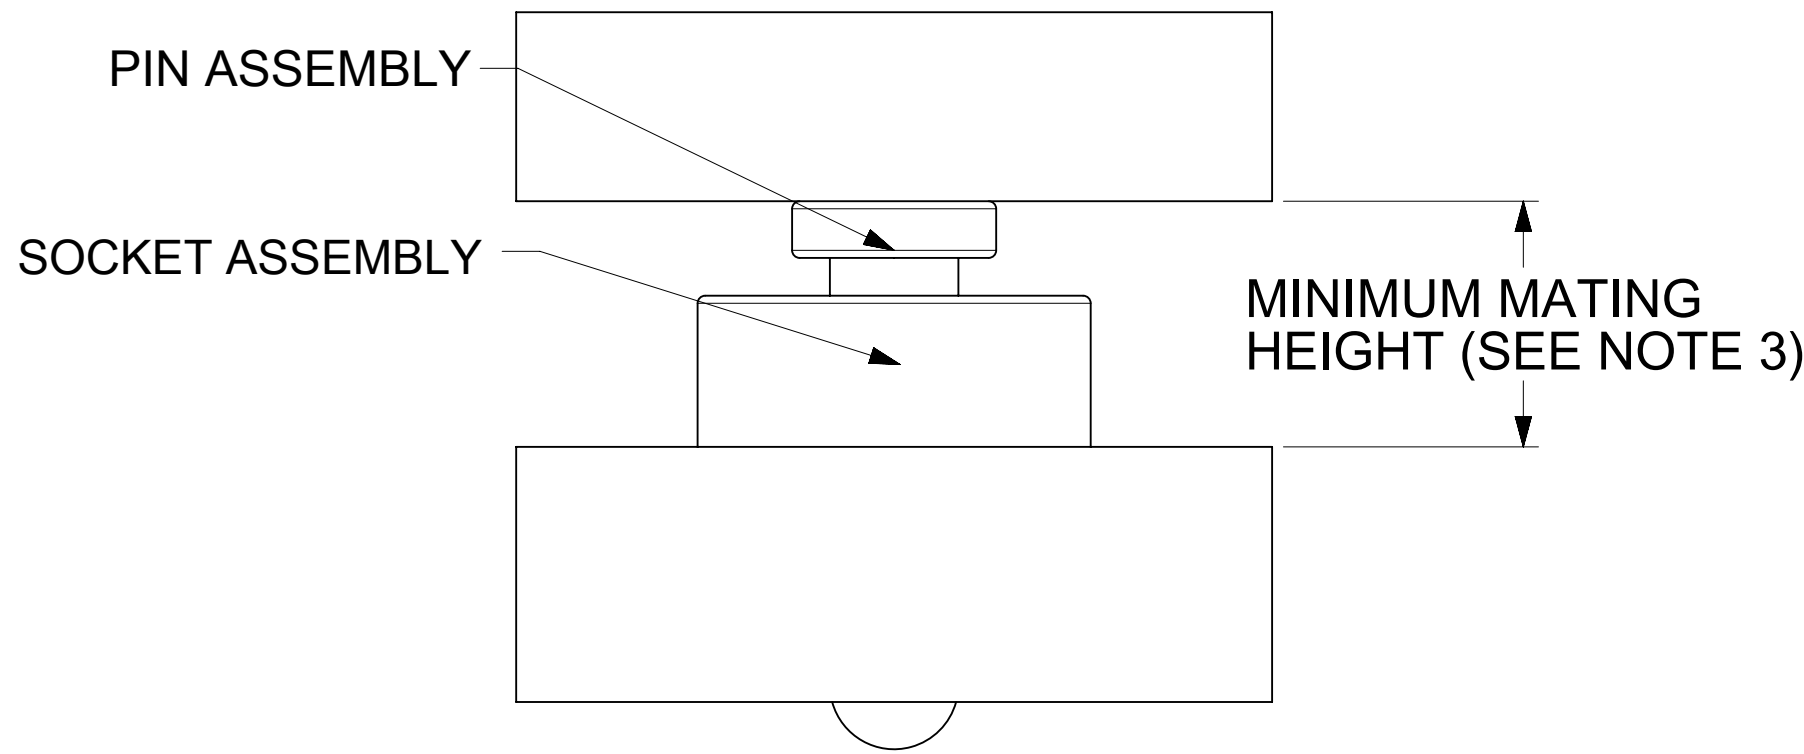

MATING PROFILE

- NOTES:
- MATERIALS: COPPER ALLOY
RETENTION CAP: STAINLESS STEEL
 - PLATING:
 - CONTACT AREA: GOLD.
 - REST: SILVER WITH TARNISH INHIBITOR
 - MATES WITH THE STANDARD PIN DRAWINGS:
 - 3.4MM SMT DRAWING 2032631134-SD, MIN. MATE DISTANCE 6.5MM
 - 3.4MM PRESS FIT DRAWING 2032630034-SD, MIN. MATE DISTANCE 6.75MM
 - PRODUCT SPECIFICATION: 2043130018-PS
 - APPLICATION SPECIFICATION: 2043130018-AS.
SEE APPLICATION SPEC FOR SOLDERING INFORMATION.
 - PACKAGING SPECIFICATION: 2043180018-PK.
 - SILVER COMPONENTS WILL BE SUPPLIED TARNISH FREE
BUT MAY TARNISH OVER TIME.
 - DATE CODE TO BE LASER MARKED APPROXIMATELY WHERE SHOWN
USING DDYY FORMAT

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED THE VIEWS			molex		
mm		5:1							
GENERAL TOLERANCES (UNLESS SPECIFIED)				3.4MM CST SOCKET STAND PRESS-FIT					
ANGULAR TOL ± °									
4 PLACES		±		EC NO: 716736			PRODUCT CUSTOMER DRAWING		
3 PLACES		±		DRWN: SOURAJ					

DOCUMENT STATUS	P1	RELEASE DATE	2022/10/11	14:42:21
-----------------	----	--------------	------------	----------