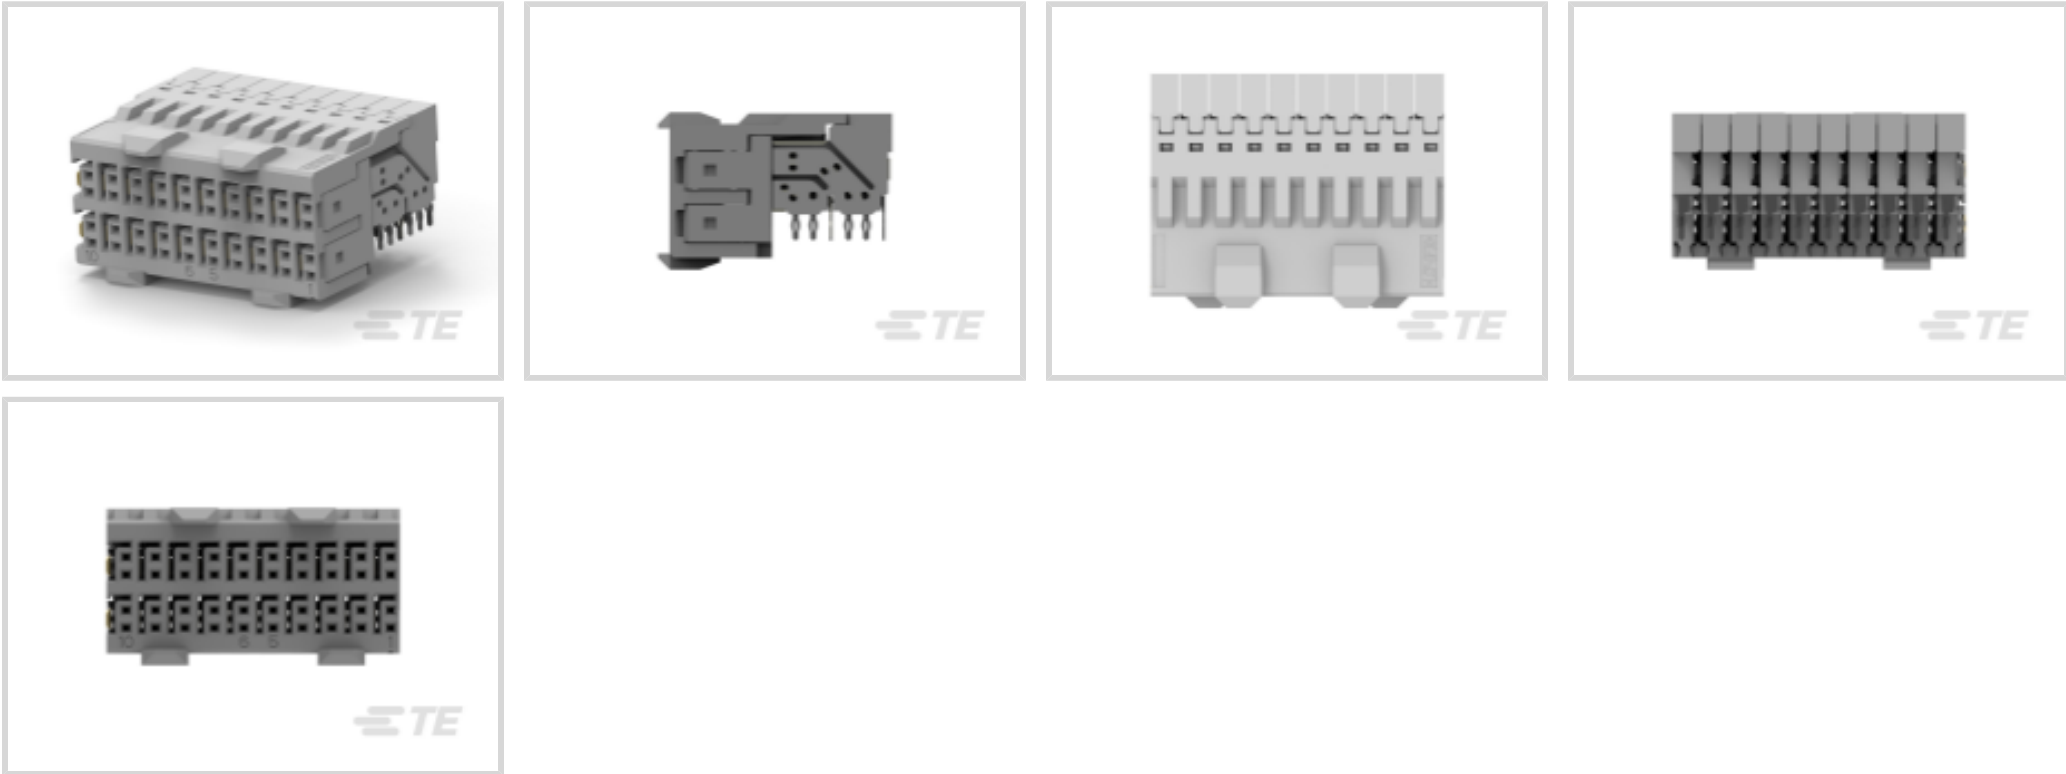




Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors



EU RoHS Compliance: **Not Compliant**
EU ELV Compliance: **Compliant with Exemptions**
Number of Positions: **40**
Row-to-Row Spacing: **1.5 mm [.059 in]**
Mating Alignment: **With**

Features

Other

EU RoHS Compliance	Not Compliant
EU ELV Compliance	Compliant with Exemptions

Product Type Features

Connector & Contact Terminates To	Printed Circuit Board
Connector System	Board-to-Board
PCB Connector Assembly Type	PCB Mount Receptacle
Shroud Style	Fully Shrouded

Configuration Features

Number of Pairs	20
Number of Ground Positions	20
Number of Signal Positions	40
Pairs per Column	2
Card Slot Centerline	20.3 mm[.8 in]
Number of Positions	40



Number of Rows	4
Number of Columns	10
PCB Mount Orientation	Right Angle
Guide Location	Unguided

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Signal Characteristics

Data Rate	≤12 Gb/s
-----------	----------

Body Features

Shield Material	Phosphor Bronze
Primary Product Color	Gray

Contact Features

Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Contact Layout	Matrix
Contact Mating Area Plating Material	Gold
Contact Base Material	Copper Nickel Silicon
Contact Type	Receptacle
Contact Current Rating (Max)	.7 A

Termination Features

Termination Method to PCB	Through Hole - Press-Fit
Termination Post & Tail Length	2.2 mm[.086 in]

Mechanical Attachment

Mating Alignment	With
Mating Alignment Type	Polarization
Connector Mounting Type	Board Mount

Housing Features

Housing Material	Polyester - GF
Centerline (Pitch)	2.5 mm[.098 in]

Dimensions

Connector Width	18.9 mm[.744 in]
Connector Height	11.35 mm[.446 in]
Connector Length	24.9 mm[.98 in]



Row-to-Row Spacing	1.5 mm[.059 in]
--------------------	-----------------

Usage Conditions

Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Tube
------------------	------

Product Compliance

For compliance documentation, visit the product page on TE.com>

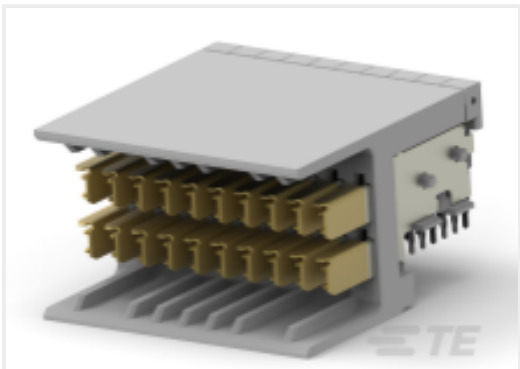
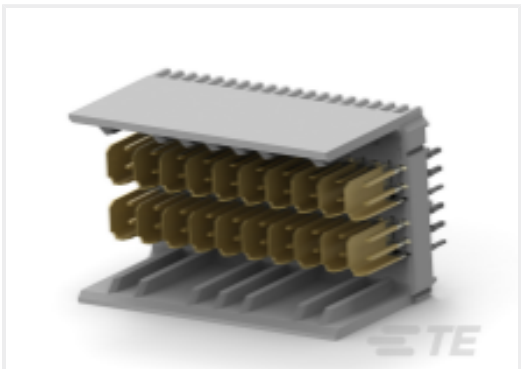
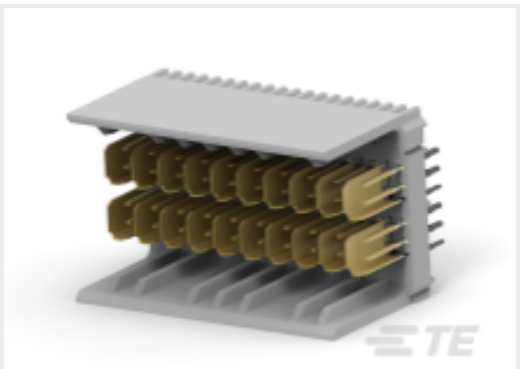
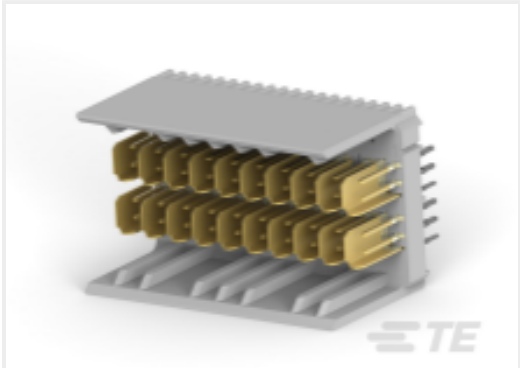


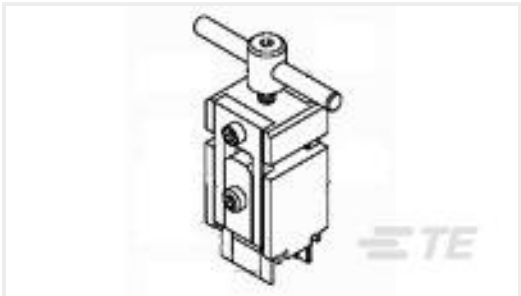
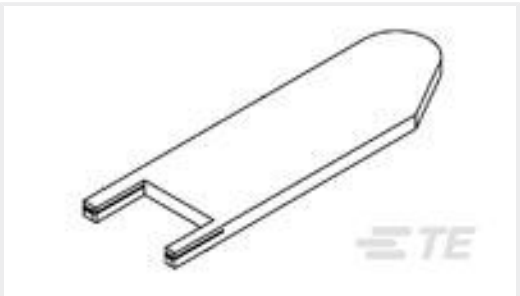
EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Pb (13% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

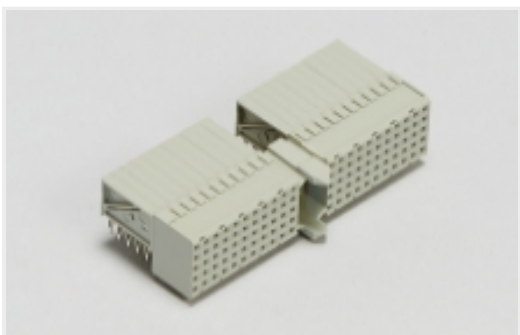
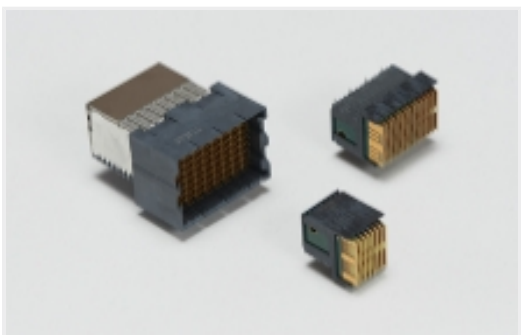
This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts

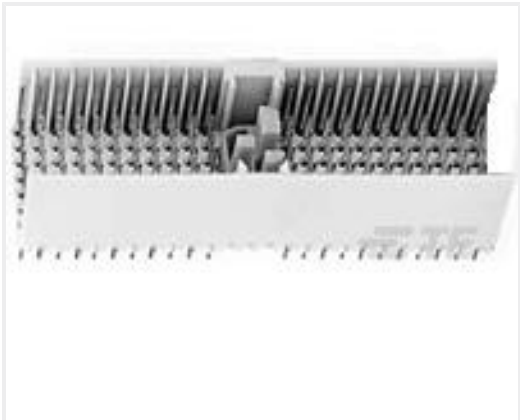
 TE Part # 6469169-1 HMZD 2PR RA HDR 40P	 TE Part # 6469076-1 HM-ZD 2PR HDR ASSY 1.8MM	 TE Part # 6469025-1 HM-ZD 2PR HDR 40P 2.5MM	 TE Part # 6469025-2 HM-ZD 2PR HDR 40P 3.7MM
 TE Part # 1469025-1 HM-ZD 2PR HDR 40P 2.5MM	 TE Part # 91350-1 SEATING TOOL,HMZD RCPT, 2 PAIR	 TE Part # 6469076-2 HM-ZD 2PR HDR ASSY 1.8MM	 TE Part # 6469314-1 2 PAIR HM ZD HDR ASSY, SEQU, LF
 TE Part # 1469323-1 2 PR HEADER ASSY, 40 POSN, PAC	 TE Part # 1469205-1 HMZD 2PAIR, 25MM MODULE, 2.5MM	 TE Part # 1469314-1 2 PAIR HM ZD HEADER ASSY, SEQU	 TE Part # 1469648-1 HM-ZD 2PR HDR 40P QINGDAO PROD.
 TE Part # 1469734-1 HM-ZD 2PR HDR 40P SEQ, LF	 TE Part # 1583224-1 TOOL,REMOVAL,HMZD RECEPT. HOUS	 TE Part # 1583249-1 TOOL,REMOVAL,HMZD CHICLET,2PR.	 TE Part # 6469054-1 HM-ZD 2PR HDR SELECT LOAD

Also in the Series | Z-PACK HM-Zd

 Hard Metric Backplane Connectors(1)	 High Speed Backplane Connectors(46)	 Insertion & Extraction Tools(1)
--	---	--



Customers Also Bought



TE Part #100668-1
Z-PACK M.ASSY.154P.



TE Part #640452-2
02P MTA100 HDR ASSY SQ STR



TE Part #9-146258-0
80 MODII HDR DRST B/A .100CL



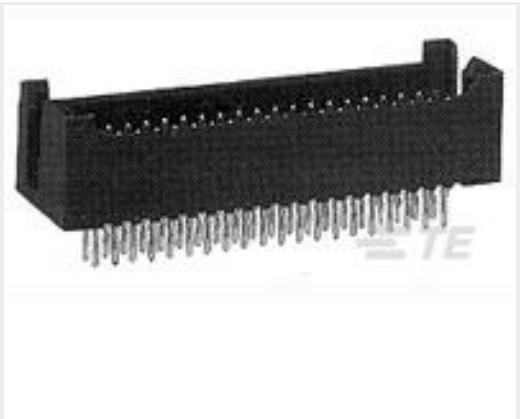
TE Part #120955-1
TE UPM R/A Header 5P HC Power, LLLLL



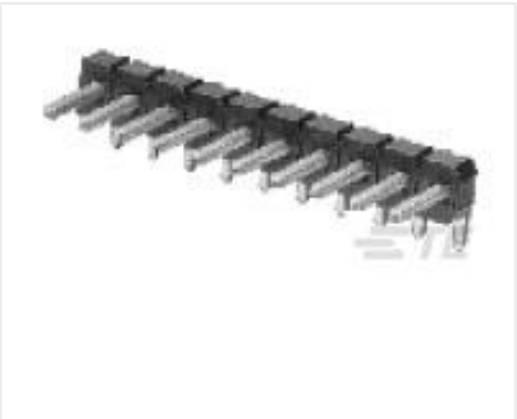
TE Part #1-2071556-2
OJS-SH-105HEF,00000



TE Part #CONMMCX002
MMCX Jack 50 Ohm PCB Through Hole



TE Part #5-102567-6
50 MODII 2PC HDR DR SHRD .100, ROHS



TE Part #2-826947-0
MOD-2 PIN HDR.1X20P



TE Part #2041517-1
MINI USB, RCPT,V/T,DIP, B TYPE,30u" Au"



TE Part #6-2337992-8
RJ45 JACK MAG. POE 1GB LED 1X1

Documents

Product Drawings

HM-ZD 2PR RECP 40P

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1469028-1_F_c-1469028-1-f.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1469028-1_F_c-1469028-1-f.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1469028-1_F_c-1469028-1-f.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



Product Specifications

Application Specification

English