

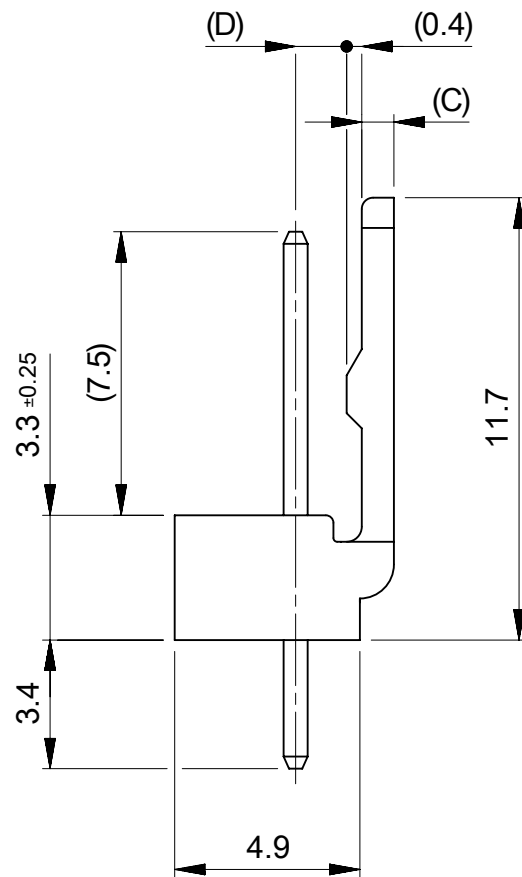
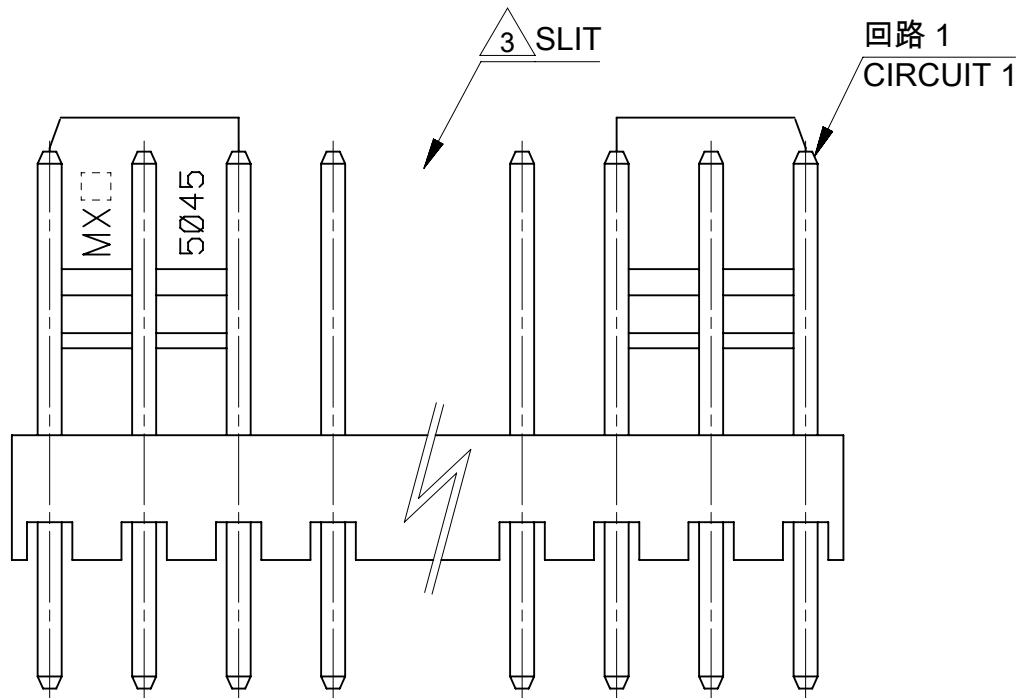


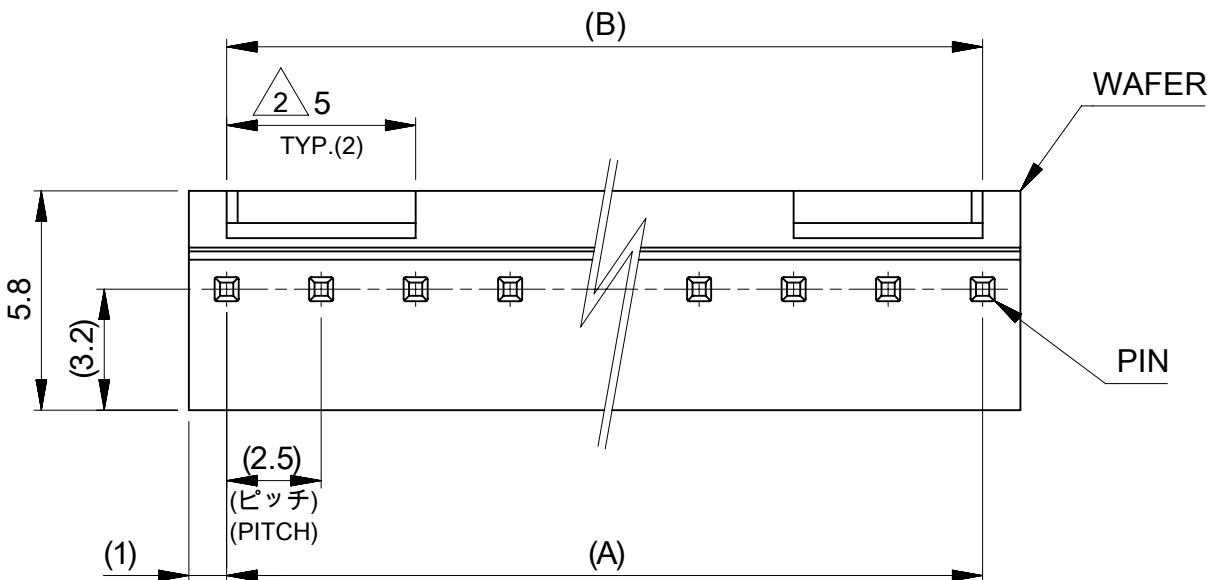

注記
NOTES:

- 材料(MATERIAL)
ウェハー : ポリアミド, UL94V-0 (色: アイボリー)
WAFER: POLYAMIDE, UL94V-0 (COLOR: IVORY)
ピン: □0.635 黄銅、銅下地錫めっき
PIN: □0.635 BRASS, TIN OVER COPPER PLATING
2 6極以上に適合。
TO BE APPLIED FOR 6 CKT. AND ABOVE.
3 5極以下はロック部スリットなし。
NO SLIT IS PROVIDED FOR 5 CKT.AND LESS THAN 5 CKT.

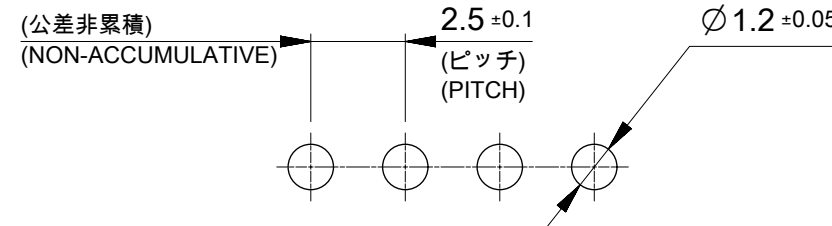

基板取付穴推奨寸法
RECOMMENDED P.C. BOARD HOLE DIM.

1.35	0.85	35	35	22041151	5045-15A	15
1.35	0.85	32.5	32.5	22041141	5045-14A	14
1.35	0.85	30	30	22041131	5045-13A	13
1.35	0.85	27.5	27.5	22041121	5045-12A	12
1.35	0.85	25	25	22041111	5045-11A	11
1.35	0.85	22.5	22.5	22041101	5045-10A	10
1.35	0.85	20	20	22041091	5045-09A	9
1.35	0.85	17.5	17.5	22041081	5045-08A	8
1.35	0.85	15	15	22041071	5045-07A	7
1.35	0.85	12.5	12.5	22041061	5045-06A	6
1.35	0.85	10	10	22041051	5045-05A	5
1.35	0.85	7.5	7.5	22041041	5045-04A	4
1.2	1	5	5	22041031	5045-03A	3
1.2	1	2.5	2.5	22041021	5045-02A	2
(D)	(C)	(B)	(A)	ORDER NO.	ENG. NO.	CKT.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC: REVISED				molex							
mm		5:1													
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 758980 DRWN: HHUSSIN2023/07/18 CHK'D: SAKIYAMA2024/03/13 APPR: AIDA2024/03/14 INITIAL REVISION: DRWN: KKOHAMA2000/03/27 APPR: NUKITA2013/06/13											
ANGULAR TOL ± 3.0 °															
4 PLACES		± 0.4													
3 PLACES		± 0.4													
2 PLACES		± 0.4													
1 PLACE		± 0.4													
0 PLACES		± 0.4													
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						A3-SIZE		5045		SEE CHART		GENERAL MARKET		1 OF 1	
MINI-LATCH 2.5 HEADER ASSEMBLY VT WITH LOCK TIN PLATING										PRODUCT CUSTOMER DRAWING					
DOCUMENT NUMBER								DOC TYPE		DOC PART		REVISION			
SD-5045-NA								PSD		001		N			