

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0151660177

Status:


Active

Overview:

FFC Cable Jumpers, Premo-Flex Flat-Flexible Cable Jumpers

Description:

0.50mm Pitch Premo-Flex FFC Jumper, Same Side Contacts (Type A), 229.00mm Cable Length, Tin (Sn) Plating, 16 Circuits

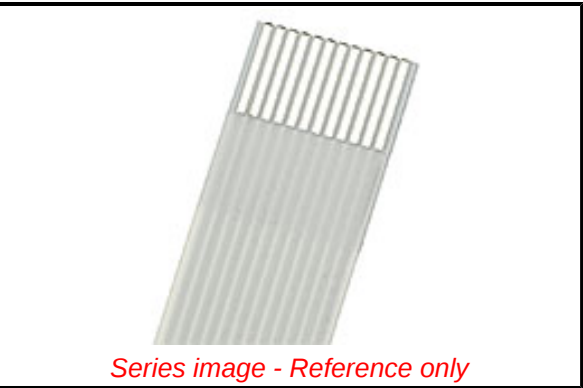

Series image - Reference only

Documents:

[Drawing \(PDF\)](#)

[Product Specification PS-15166-001-001 \(PDF\)](#)

[Datasheet \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

|                                    |                                                           |
|------------------------------------|-----------------------------------------------------------|
| <b>General</b>                     |                                                           |
| Product Family                     | Cable                                                     |
| Series                             | 15166                                                     |
| Comments                           | Contacts on the same side, Type A                         |
| Crimp Quality Equipment            | Yes                                                       |
| Overview                           | FFC Cable Jumpers, Premo-Flex Flat-Flexible Cable Jumpers |
| Product Name                       | Premo-Flex FFC Jumper                                     |
| Taxonomy                           | Flexible Printed Circuit (FPC)                            |
| UPC                                | 884982846692                                              |
| <b>Physical</b>                    |                                                           |
| Cable Length                       | 229.00mm                                                  |
| Circuits (Loaded)                  | 16                                                        |
| Contact Layout Type                | A (same side)                                             |
| Material - Plating Mating          | Tin                                                       |
| Net Weight                         | 1.000/g                                                   |
| Packaging Type                     | Bag                                                       |
| Pitch - Mating Interface           | 0.50mm                                                    |
| Temperature Range - Operating      | -40° to +105°C                                            |
| Wire Size AWG                      | N/A                                                       |
| Wire/Cable Type                    | Flat Flex Cable                                           |
| <b>Electrical</b>                  |                                                           |
| Current - Maximum per Contact      | 0.5A                                                      |
| Voltage - Maximum                  | 60V AC                                                    |
| <b>Material Info</b>               |                                                           |
| <b>Reference - Drawing Numbers</b> |                                                           |
| Product Specification              | PS-15166-001-001                                          |
| Sales Drawing                      | SD-15166-001-001                                          |

**EU ELV**

Not Relevant

**EU RoHS**

Compliant

**China RoHS**

REACH SVHC

Not Contained Per -

D(2022)4187-DC (10

June 2022)

**Halogen-Free**

Status

Not Low-Halogen

For more information, please visit

Contact US

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

15166 Series

Mates With

Easy-On FFC/FPC Connector: . 527451633

, 527461633 , 525591633 , 525591634

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION