




Terminals & Splices > Quick Disconnects

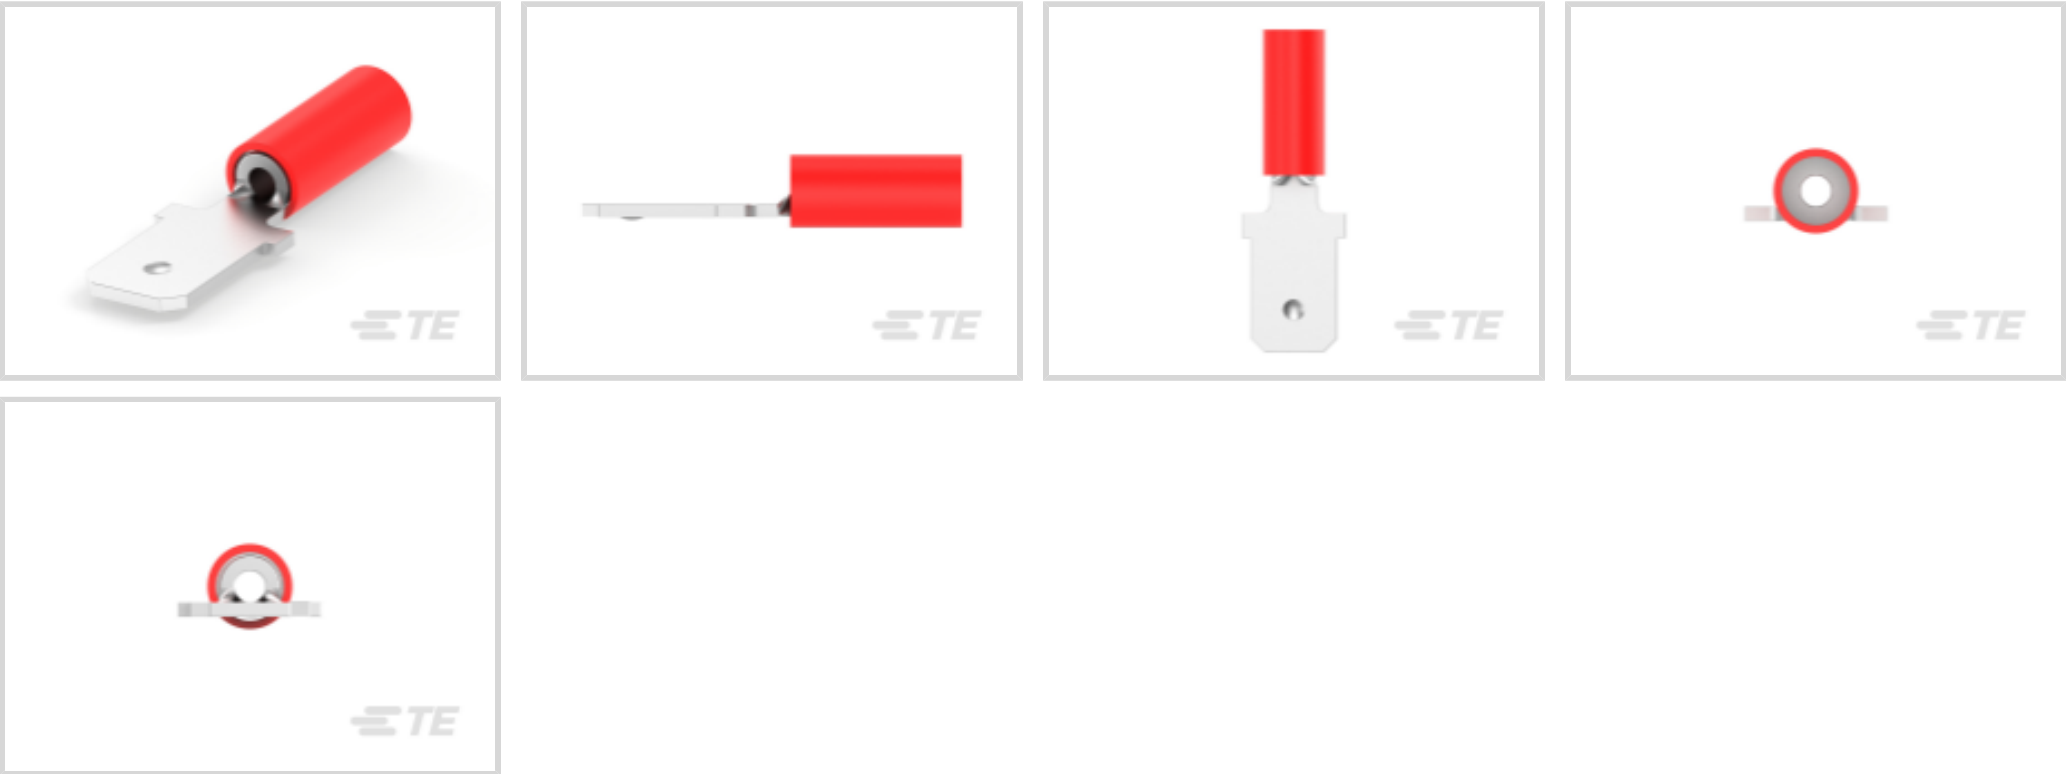

Quick Disconnect Terminal Type: **Tab**
Wire Size: **592 – 3260 CMA**
Mating Tab Width: **6.35 mm [.25 in]**

Features

Contact Features

Quick Disconnect Terminal Type	Tab
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Copper Alloy
Terminal Plating Material	Tin
Crimp Type	Compression
Barrel Type	Closed

Dimensions

Wire Size	592 – 3260 CMA
Product Length	23.11 mm[.91 in]
Compatible Insulation Diameter Range	3.68 mm[.145 in]

Packaging Features

Packaging Method	Reel
Packaging Quantity	5000



Usage Conditions

Insulation Option	Partially Insulated
Operating Temperature Range	105 °C[221 °F]

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant
Barrel Color	Red

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 59824-1
TETRA-CRIMP PIDG PG FASTON 22-10 ASSY

TE Part # 47386
DAHT PG PIDG 26-16 ASSY

TE Part # 58433-3
PRO CR ASSY, RBY IS9252

TE Part # 58423-1
DIE, RBY IS9252

TE Part # 169404
CERTI-LOK DIE

Customers Also Bought

TE Part #2-34162-1
TERMINAL,PG R 16-14 1/4

TE Part #2-34150-1
PG R 22-16 COMM 22-18 MIL 1/4

TE Part #2-521055-2
ULTRAFAST 250 ASSY TAB 22-18 AWG TPBR

TE Part #62026-1
187 FASTON REC 20-16 AWG TPBR

TE Part #61944-1
250 FASTON REC 18-14 AWG BR

TE Part #2-520261-2
ULTRA-FAST 187 ASY REC 22-18 TPBR

TE Part #63130-3
SPLICE REC. 1500-5000 .020 TPBR

TE Part #794956-1
VAL-U-LOK SKT BR SN 22-18AWG



Documents

Product Drawings

[TAB,PIDG TERMI-BK 22-16](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_66023-4_U.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_66023-4_U.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_66023-4_U.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_66023-4_K.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_66023-4_K.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_66023-4_K.2d_dxf.zip](#)

English

[3D PDF](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.