


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/10/09	
A		REVISED SPEC. & DIM.	05/25/12	
B		ADDED DRAWING	12/25/18	AY/RC1






60, 64 PIN

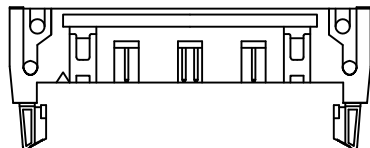


20, 24, 26, 30, 34, 40, 50 PIN



10, 14, 16 PIN

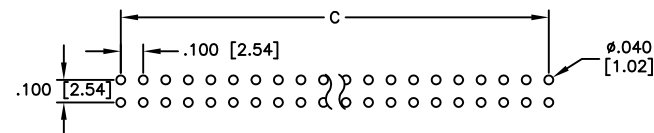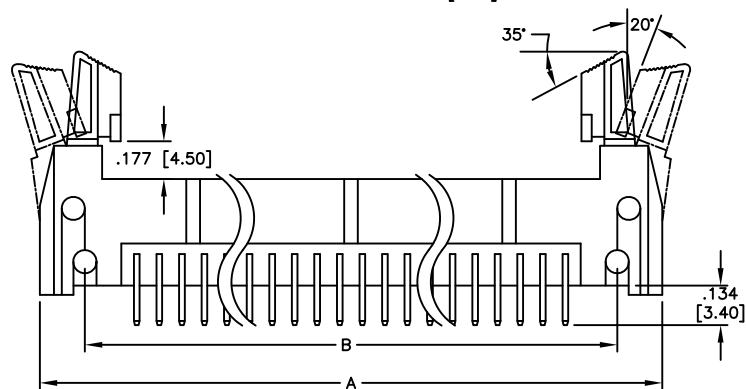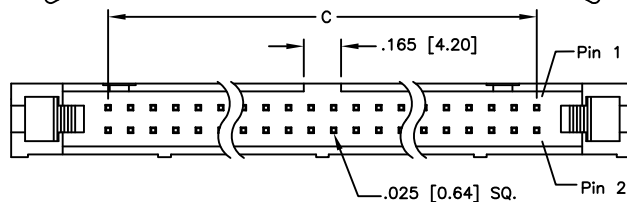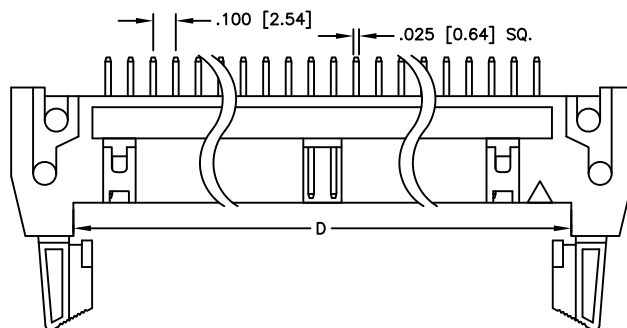

RECOMMENDED PCB LAYOUT

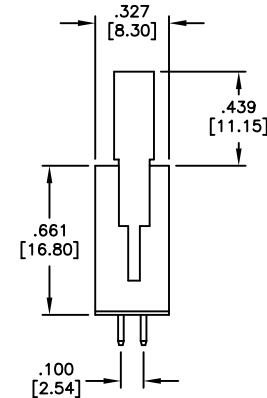

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0, Color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 1 Amp

Contact Resistance: 10 mohm max

Insulation resistance: 1000 Mohm min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 10, 14, 16, 20, 24, 26, 30, 34, 40, 50, 60, 64

A = .100 [2.54] x No. of Spaces + .856 [21.74]

B = .100 [2.54] x No. of Spaces + .458 [11.64]

C = .100 [2.54] x No. of Spaces

D = .100 [2.54] x No. of Spaces + .307 [7.79]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

INCHES HOLES

APPROVALS		DATE
DRAWN	DY	9/10/09
CHECKED		
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
LATCH BOX HEADER, STRAIGHT
SHORT EJECTOR LATCHES

SIZE X	PART NO. MHR-XX-VUAS	REV.P B
-----------	-------------------------	------------

REF: S00059T SCALE: NTS SHEET 1 OF 1