


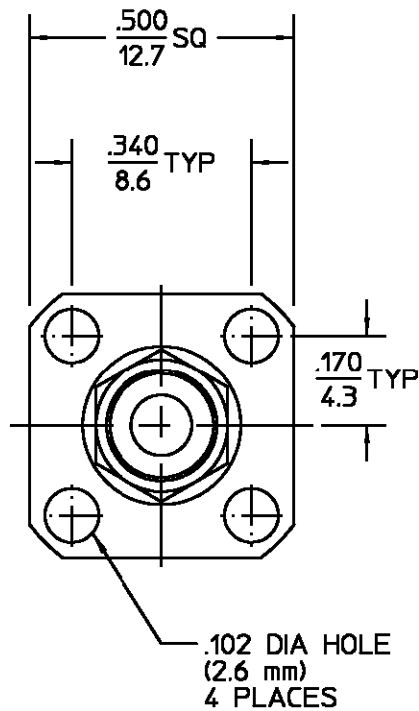

DESIGNED FOR USE WITH RG-196 CABLE	
CABLE ENTRY DIAMETER MINIMUM	
SLEEVE	.032
CONTACT	.016

HOUSING CLAMP NUT SLEEVE	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	GOLD PLATE PER MIL-G-45204
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
GASKET	VITON "A" PER MIL-R-83248	N/A
SHRINK TUBING	HEAT SHRINKABLE POLYOLEFIN COMPOUND MIL-I-23053/11	N/A
FERRULE	COPPER OR BRASS ALLOY ROCKWELL F65 MAXIMUM	GOLD PLATE PER MIL-G-45204
REAR DIELECTRIC	NYLON	N/A
COMPONENT	MATERIAL	FINISH
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN BY <i>M.M.</i> DATE 10/27/94 CHECKED BY APPD BY <i>RAC</i> 12/6/95	AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599
FRAC. DEC. ANGLES * 1/64 * .005 * 1°	USE ASS'Y PROCEDURE NO. AP <u>20-059</u> 408-04806	TITLE OSM 4 HOLE FLANGE MOUNT CABLE JACK CRIMP ATTACHMENT
These drawings and speci- fications are the property of M/A COM Interconnect Div. and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale o f item(s) without written permission.	SIZE B	CODE IDENT NO. 26805
	SCALE 3 : 1	2036-5016-00
		REV 01
		SHEET 1 OF 1

AMP PART # 1052030-1
SHEET 1 OF 1 REV A