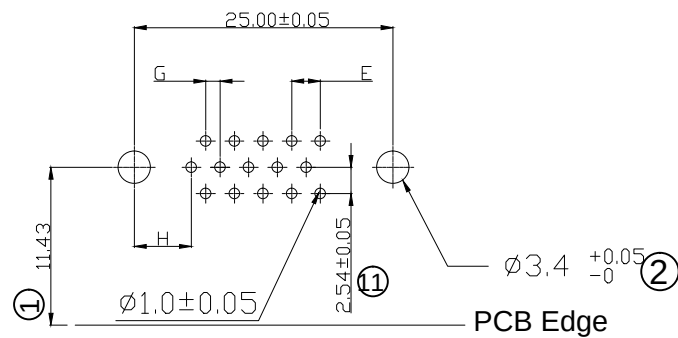
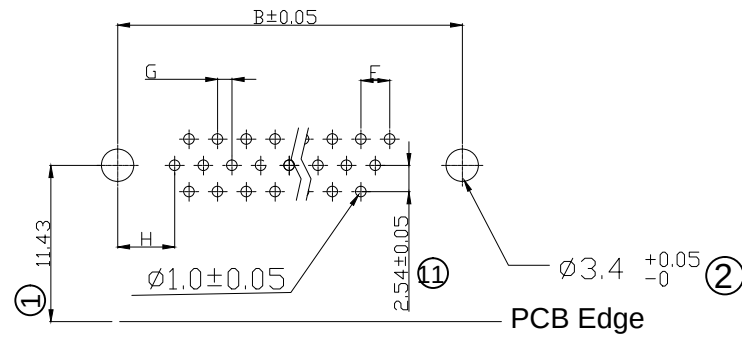
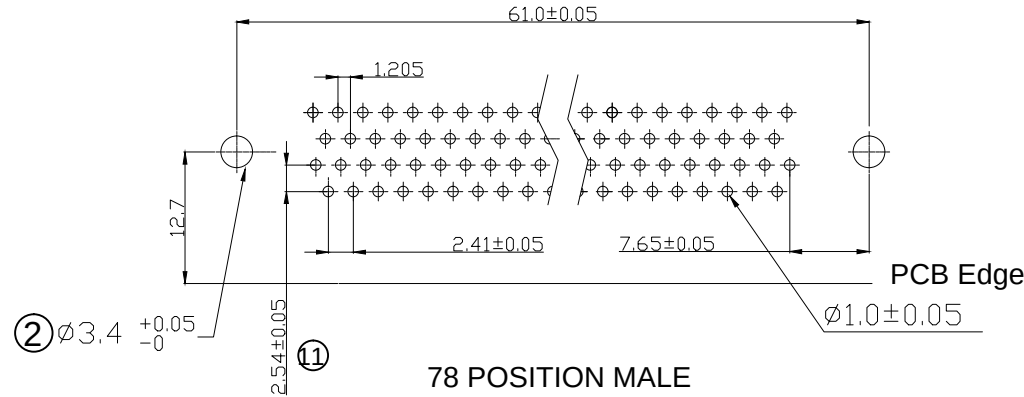
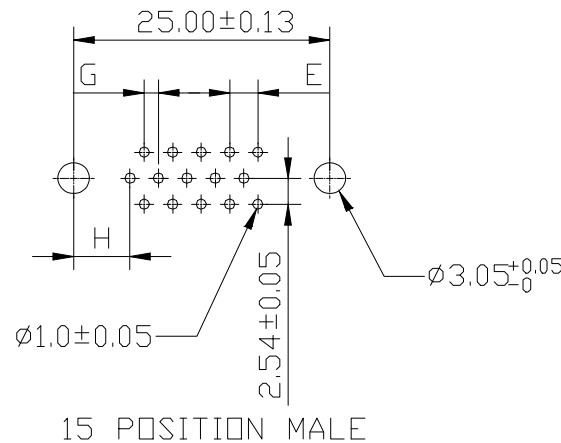
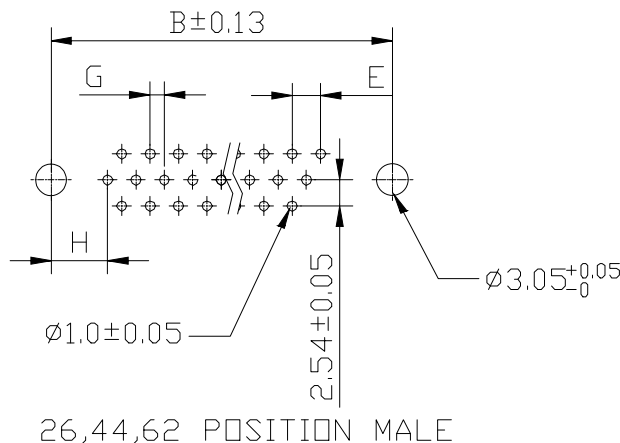
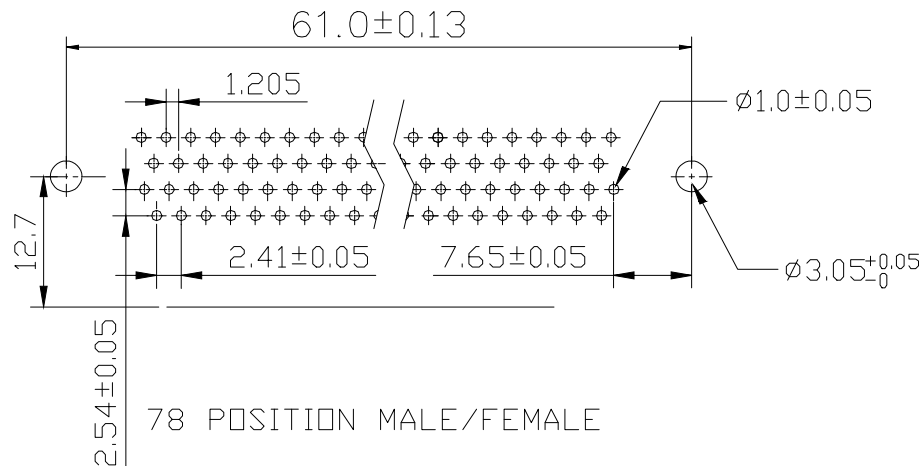
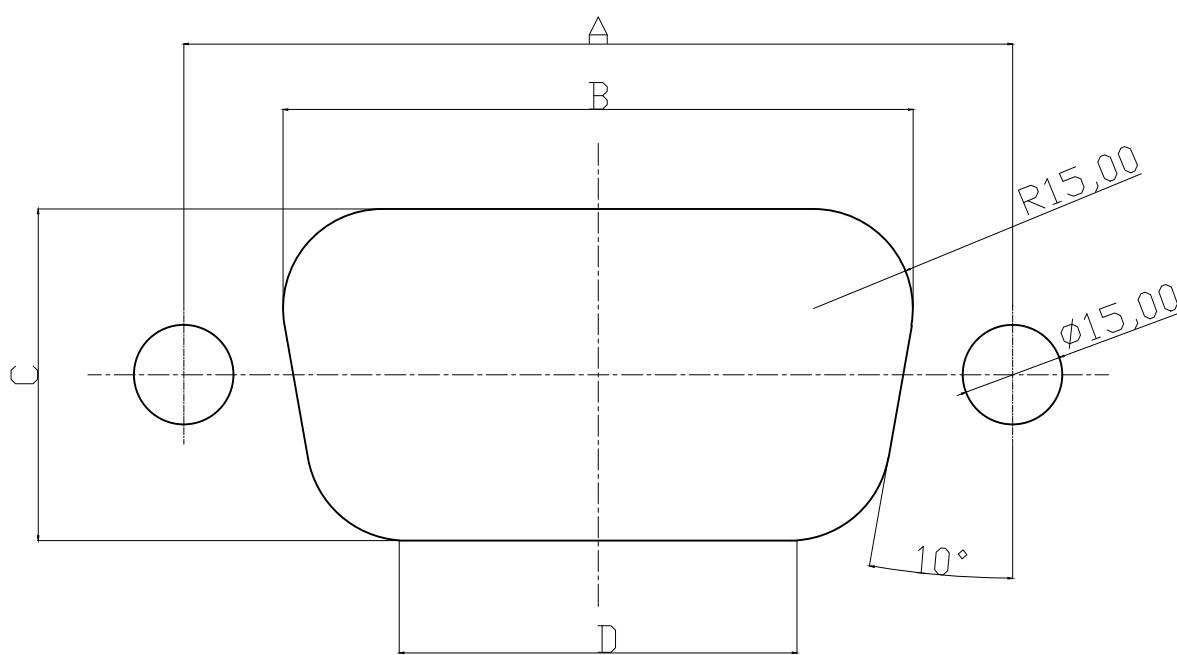


	1	2	3	4	5	6	7																																				
A	Male							A																																			
B	P.C.B LAYOUT PATTERN							B																																			
C								C																																			
D	⑨ P.C.B LAYOUT PATTERN for Without Screwlock							D																																			
E								E																																			
F	Dimensions <table><tr><th>Positions</th><th>A</th><th>B</th><th>C</th><th>E</th><th>G</th><th>H</th></tr><tr><td>15</td><td>30.81</td><td>24.99</td><td>16.92</td><td>2.29</td><td>1.145</td><td>7.04</td></tr><tr><td>26</td><td>39.20</td><td>33.30</td><td>25.25</td><td>2.29</td><td>1.145</td><td>6.88</td></tr><tr><td>44</td><td>53.05</td><td>47.04</td><td>38.96</td><td>2.29</td><td>1.145</td><td>6.88</td></tr><tr><td>62</td><td>69.40</td><td>63.50</td><td>55.42</td><td>2.41</td><td>1.205</td><td>7.00</td></tr></table>							Positions	A	B	C	E	G	H	15	30.81	24.99	16.92	2.29	1.145	7.04	26	39.20	33.30	25.25	2.29	1.145	6.88	44	53.05	47.04	38.96	2.29	1.145	6.88	62	69.40	63.50	55.42	2.41	1.205	7.00	F
Positions	A	B	C	E	G	H																																					
15	30.81	24.99	16.92	2.29	1.145	7.04																																					
26	39.20	33.30	25.25	2.29	1.145	6.88																																					
44	53.05	47.04	38.96	2.29	1.145	6.88																																					
62	69.40	63.50	55.42	2.41	1.205	7.00																																					
G	RoHS compliant Unit: mm		Scale	Free	⑭	Add the UL E-No.	21.07.2025	Peter		Date	Name	Customer-No.	G																														
TOLERANCE			⑬	correct p/n T to T3 & T3 to T	03.12.2018	Hellwig	Drawn	15.08.2012	Lucas																																		
X.			±0.38	⑫	Change T1 to T and update TS & T3	20.08.2018	Xavier	Approved	21.07.2025	Peter	ASSMANN WSW-No. A-HDx xx A-KG/x		H																														
X.X			±0.25	⑪	Update row pitch of PCB layout	20.08.2018	Xavier				Drawing-No.	ASS 4897 CO		rev14																													
X.XX			±0.13	⑩	Add the plating 15u"Au	06.08.2018	Winnie	ASSMANN WSW components A company of BCS		Replace	Sheet 2/5																																
DIM			TOL	⑨	Update	26.06.2018	Xavier																																				
X.°			±3°	Id.	Modification	Date	Name																																				
X.X°			±1.0°																																								
H	Angle	TOL																																									
	1	2	3	4	5	6	7	SV4086																																			

		1		2		3		4		5		6		7																																												
A B C D E F	Female															A B C D E F																																										
	⑪ Without Screwlock																																																									
	⑪ Without Screwlock																																																									
	<table><tr><th colspan="7">Dimensions</th></tr><tr><th>Positions</th><th>A</th><th>B</th><th>D</th><th>E</th><th>G</th><th>H</th></tr><tr><td>15</td><td>30.81</td><td>24.99</td><td>16.33</td><td>2.29</td><td>1.145</td><td>7.04</td></tr><tr><td>26</td><td>39.20</td><td>33.30</td><td>24.70</td><td>2.29</td><td>1.145</td><td>6.88</td></tr><tr><td>44</td><td>53.05</td><td>47.04</td><td>38.40</td><td>2.29</td><td>1.145</td><td>6.88</td></tr><tr><td>62</td><td>69.40</td><td>63.50</td><td>54.80</td><td>2.41</td><td>1.205</td><td>7.00</td></tr></table>																Dimensions							Positions	A	B	D	E	G	H	15	30.81	24.99	16.33	2.29	1.145	7.04	26	39.20	33.30	24.70	2.29	1.145	6.88	44	53.05	47.04	38.40	2.29	1.145	6.88	62	69.40	63.50	54.80	2.41	1.205	7.00
	Dimensions																																																									
	Positions	A	B	D	E	G	H																																																			
15	30.81	24.99	16.33	2.29	1.145	7.04																																																				
26	39.20	33.30	24.70	2.29	1.145	6.88																																																				
44	53.05	47.04	38.40	2.29	1.145	6.88																																																				
62	69.40	63.50	54.80	2.41	1.205	7.00																																																				
Product Specification Material Insulator :Glass-Filled Thermoplastic PBT,UL94V-0 rated ,Black ⑧ Contact : Copper alloy, Plating: refer to table1 Shell : Steel,100u" Tin Over 50u" min Copper Clinch Nut: Brass, 100u" min Nickel Plated. Boardlock :Brass, 100u" min Nickel Plated. Screwlock :Brass, 100u" min Nickel Plated. Electrical Contact Resistance :20 milliohms Max at 1 AMP DC. Insulation Resistance :1000 magohms at 500 VDC Dielectric Withstanding Voltage : 1000 VAC/rms 60Hz for 1 minute Current Rating :3 AMP Volatge Rating :250 VAC/rms 60Hz ⑧ Operating Temperature: -55°C ~ +105°C ⑭ A-HDF xx A-KG/T UL E-No.: E198287 ⑭ A-HDF xx A-KG/T3 UL E-No.: E198287																																																										
G H		RoHS compliant Unit: mm		Scale	Free	⑭	Add the UL E-No.	21.07.2025	Peter		Date	Name	Customer-No.		G																																											
				TOLERANCE		⑬	correct p/n T to T3 & T3 to T	03.12.2018	Hellwig	Drawn	15.08.2012	Lucas	ASSMANN WSW-No. A-HDx xx A-KG/x																																													
				X.	±0.38	⑫	Change T1 to T and update TS & T3	20.08.2018	Xavier	Approved	21.07.2025	Peter																																														
				X.X	±0.25	⑪	Update row pitch of PCB layout	20.08.2018	Xavier				Drawing-No. ASS 4897 CO rev14																																													
				X.XX	±0.13	⑩	Add the plating 15u"Au	06.08.2018	Winnie	ASSMANN WSW components A company of BCS																																																
				DIM	TOL	⑨	Update	26.06.2018	Xavier			Replace		Sheet 3/5																																												
				X.°	±3°																																																					
				X.X°	±1.0°																																																					
Angle	TOL	Id.	Modification	Date	Name																																																					
1		2		3		4		5		6		7		SV4086																																												

	1	2	3	4	5	6	7																															
A	 Recommended Panel Cut-Out <table><tr><th>POSITION</th><th>A</th><th>B</th><th>C</th><th>D</th></tr><tr><td>15</td><td>24.99</td><td>20.47</td><td>10.67</td><td>12.01</td></tr><tr><td>26</td><td>33.30</td><td>28.80</td><td>10.67</td><td>20.35</td></tr><tr><td>44</td><td>47.04</td><td>42.52</td><td>10.67</td><td>34.06</td></tr><tr><td>62</td><td>63.50</td><td>59.08</td><td>10.67</td><td>50.62</td></tr><tr><td>78</td><td>61.00</td><td>56.34</td><td>14.10</td><td>46.90</td></tr></table>							POSITION	A	B	C	D	15	24.99	20.47	10.67	12.01	26	33.30	28.80	10.67	20.35	44	47.04	42.52	10.67	34.06	62	63.50	59.08	10.67	50.62	78	61.00	56.34	14.10	46.90	A
POSITION								A	B	C	D																											
15								24.99	20.47	10.67	12.01																											
26								33.30	28.80	10.67	20.35																											
44								47.04	42.52	10.67	34.06																											
62								63.50	59.08	10.67	50.62																											
78	61.00	56.34	14.10	46.90																																		
B	B																																					
C	C																																					
D	D																																					
E	E																																					
F	F																																					
G	RoHS compliant Unit: mm		Scale	Free	⑭	Add the UL E-No.	21.07.2025	Peter		Date	Name	Customer-No.		G																								
TOLERANCE			⑬	correct p/n T to T3 & T3 to T	03.12.2018	Hellwig	Drawn	15.08.2012	Lucas																													
X.			±0.15	⑫	Change T1 to T and update TS & T3	20.08.2018	Xavier	Approved	21.07.2025	Peter																												
X.X			±0.10	⑪	Update row pitch of PCB layout	20.08.2018	Xavier				ASSMANN WSW-No. A-HDx xx A-KG/x																											
H			X.XX	±0.05	⑩	Add the plating 15u"Au	06.08.2018	Winnie	ASSMANN WSW components A company of BCS			Drawing-No.		rev14	H																							
DIM			TOL	⑨	Update	26.06.2018	Xavier	ASS 4897 CO																														
X.°			±3°	Id.	Modification	Date	Name																															
X.X°			±1.0°																																			
	Angle	TOL								Replace	Sheet 5/5																											
	1	2	3	4	5	6	7	SV4086																														