




APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/23/13	
A		REVISED SHAPE.	7/24/13	
B		REVISED DIM.	2/17/14	AY/MY
C		REVISED SPEC.	2/24/20	AY/KL

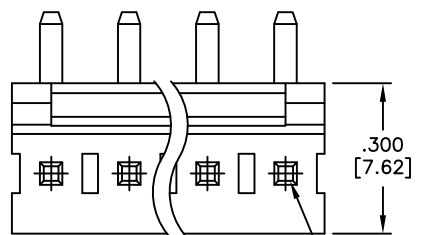

PIN 1

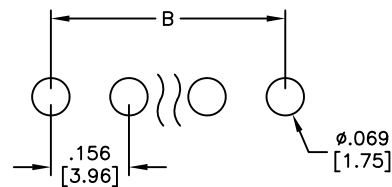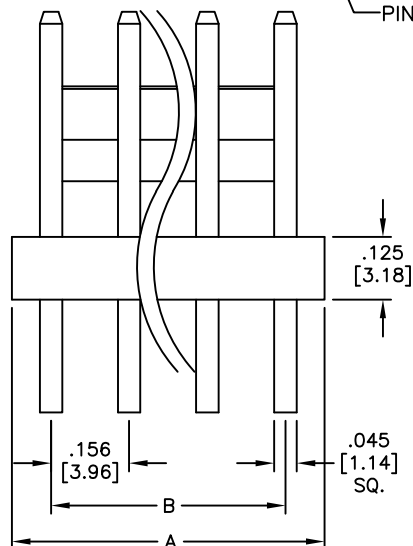

RECOMMENDED PCB LAYOUT

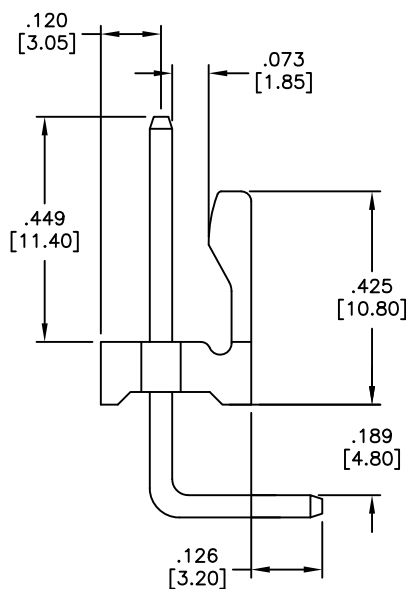

SPECIFICATIONS:

Material:

Insulator: Ny66, rated UL 94V-0

Insulator color: White

contact: Brass

Plating:

Tin over Nickel underplate overall

Electrical:

Current rating: 7.0 Amp

Contact Resistance: 20 mohms max.

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC/DC

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 2 thru 20

A = .156 [3.96] x No. of Positions

B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	AY	7/23/13
CHECKED	LW	7/23/13
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.156 [3.96] HEADER, REVERSE RIGHT ANGLE

SIZE X	PART NO. LHD-XX-TRB-V0	REV. C
REF: S00019C	SCALE: NTS	SHEET 1 OF 1