

SPECIFICATIONS:

ELECTRICAL:

INSULATION RESISTANCE:	1,000 Ω MIN.
DIELECTRIC WITHSTANDING VOLTAGE:	1,000 VAC FOR 1 MIN
CURRENT RATING:	5 AMPS
WORKING VOLTAGE:	250V
OPERATING TEMPERATURE:	-55°C TO +105°C

MATERIALS:

CONTACTS:	GOLD PLATED COPPER ALLOY
INSULATOR:	PA9T UL94 V-0 RATED
	260° PROCESS TEMP MAX
SHELL:	NICKEL PLATED STEEL
BRACKET:	NICKEL PLATED ZINC ALLOY
BOARD LOCK:	TIN PLATED COPPER ALLOY
SCREW LOCK:	NICKEL PLATED COPPER ALLOY

179-YYY-613R571

SERIES —
POSITIONS

009
015
025
037

HARDWARE OPTIONS


57 = 4-40 STAND OFFS/BOARD LOCKS

PLATING OPTIONS



1 = SELECTIVE (GF MATING AREA / TIN PLATED TAILS)

A = 30u" GOLD MATING AREA/GOLD FLASH TAILS

9 = 30u" GOLD MATING AREA/TIN TAILS

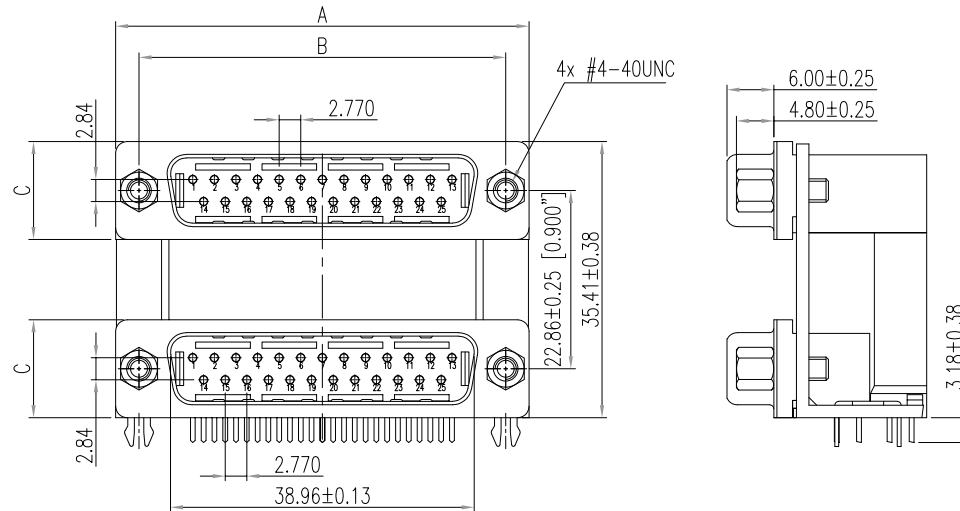

25 PIN
SHOWN

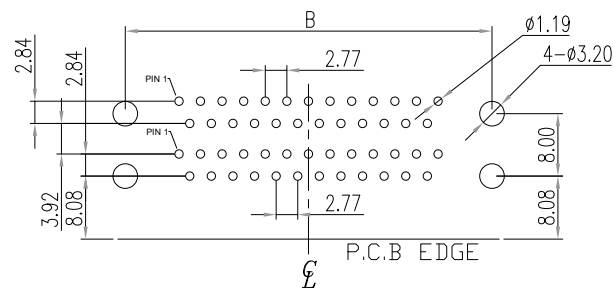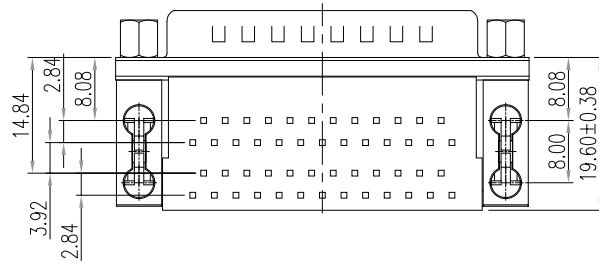

RECOMMENDED P.C.B LAYOUT

DIMENSIONS(mm)			
SIZE	A ±.38	B ±.25	C ±.38
9	30.81	24.99	12.55
15	39.19	33.32	12.55
25	53.04	47.04	12.55
37	69.32	63.50	12.55

UNITS = mm [inch]

DO NOT SCALE FROM DRAWING

DRAWN:

C. SMITH

DATE:

03/30/2007

SCALE:

NTS

SHEET

OF

REV

7

DWG NO.

179-YYY-613R571

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

NorComp