

PRODUCT NUMBER
10087120-YXXLF

LATCHING
0= WITHOUT LATCH
1= STANDARD LATCH
2= LOW PROFILE LATCH






INDICATES THE PRODUCT IS RoHS
COMPATIBLE, SEE NOTE 9



PIN STYLE	SIZE
06	2x3
08	2x4
10	2x5
14	2x7
16	2x8
18	2x9
20	2x10
26	2x13
30	2x15
34	2x17
40	2x20
44	2x22
50	2x25
60	2x30
64	2x32

PLATING :
0.05μm Au FULL PLATED
OVER 1.27μm Ni MIN

NOTES:

- HOUSING MAT'L : GLASS FILLED THERMOPLASTIC. UL94V-0 COLOR: GREY
- PIN MATERIAL : BRASS
- PRODUCT PACKAGED IN TUBES
- 40N MIN LATCH RETENTION FORCE AT FIRST EXTRACTION
- TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS PER ROW
EXAMPLE : 8 POS N x 2.54 = 20.32mm
- NO CENTRAL SLOT ON POSITIONS 6 & 8
- NO LEFT POLARIZATION ON POSITIONS 06, 08, 10, 14.
- NO GROOVE ON POSITIONS 06, 08, 10, 14, 30, 34
- RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - PLATING:
 - "LF" MEANS THE PRODUCT IS LEAD-FREE, 2μm MINIMUM MATTE TIN OVER 1.27μm MINIMUM NICKEL UNDERPLATE.
 - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C ±5°C SOLDER BATH TEMPERATURE FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MIN THICK CIRCUIT BOARD.
 - LABELING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - LEGAL STATEMENT: SEE GS-22-008.

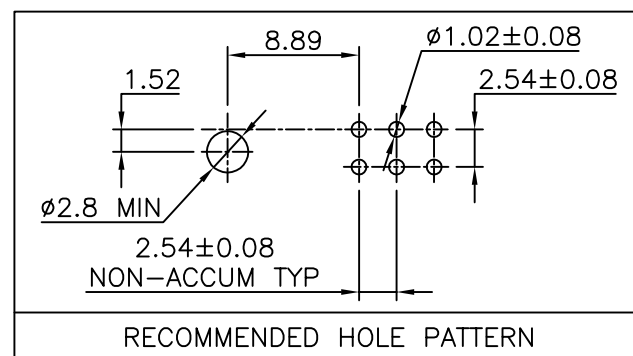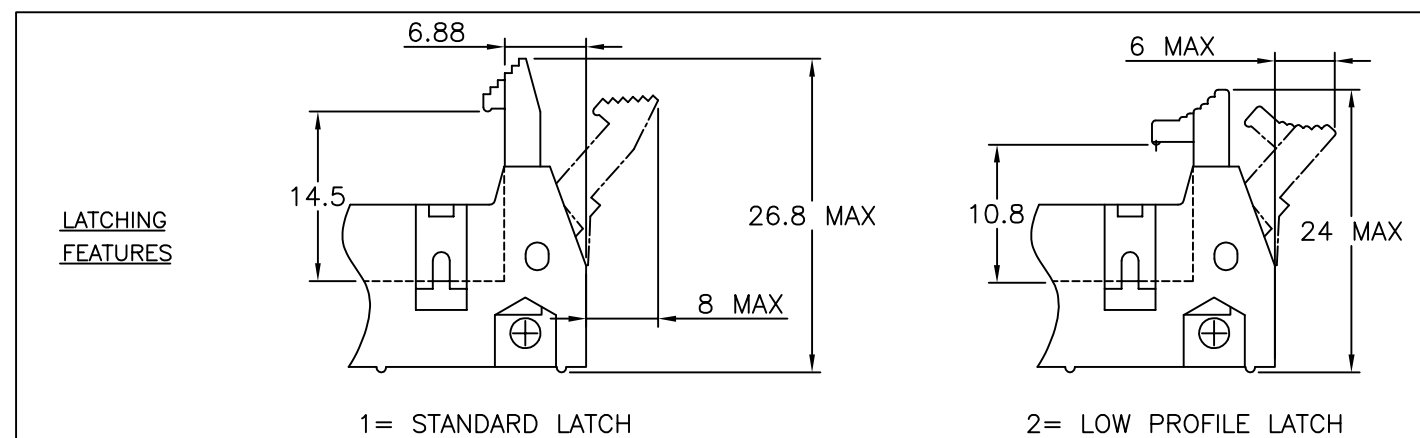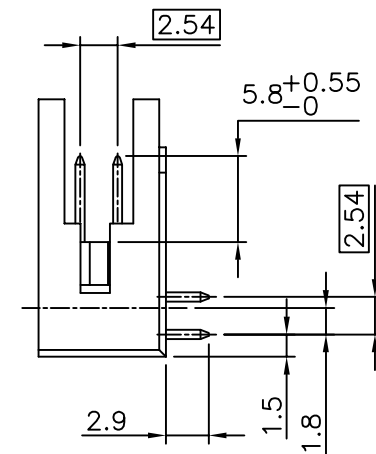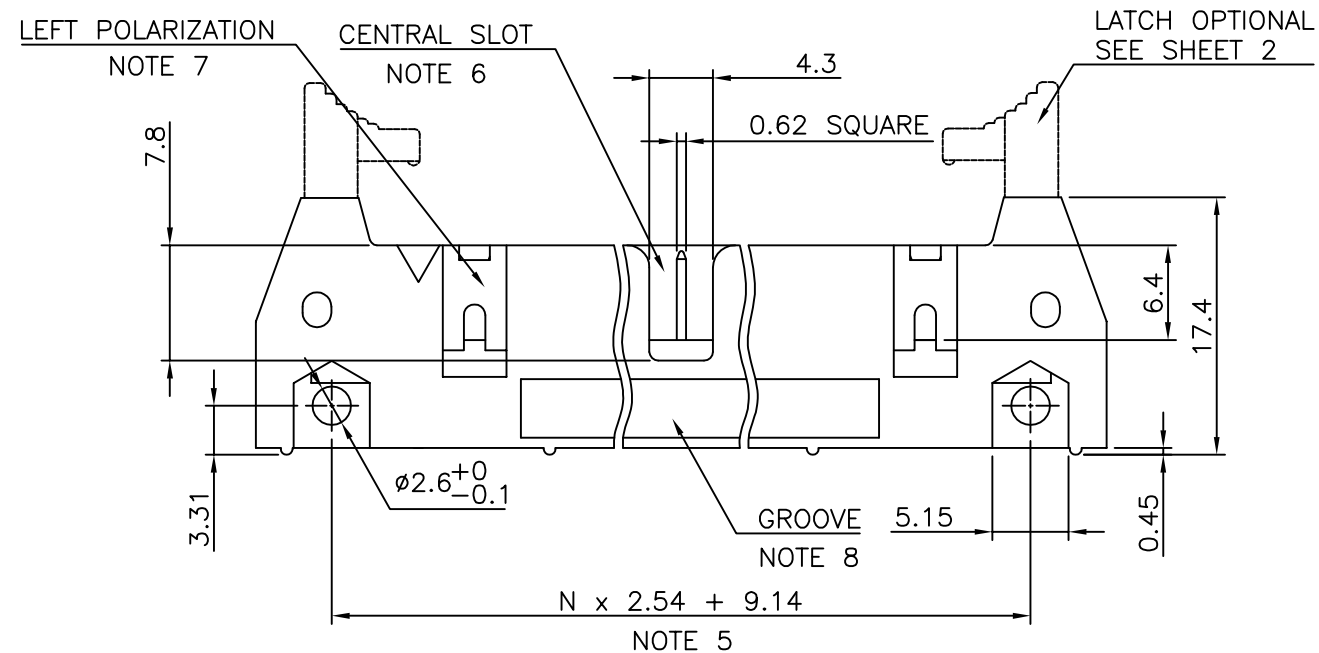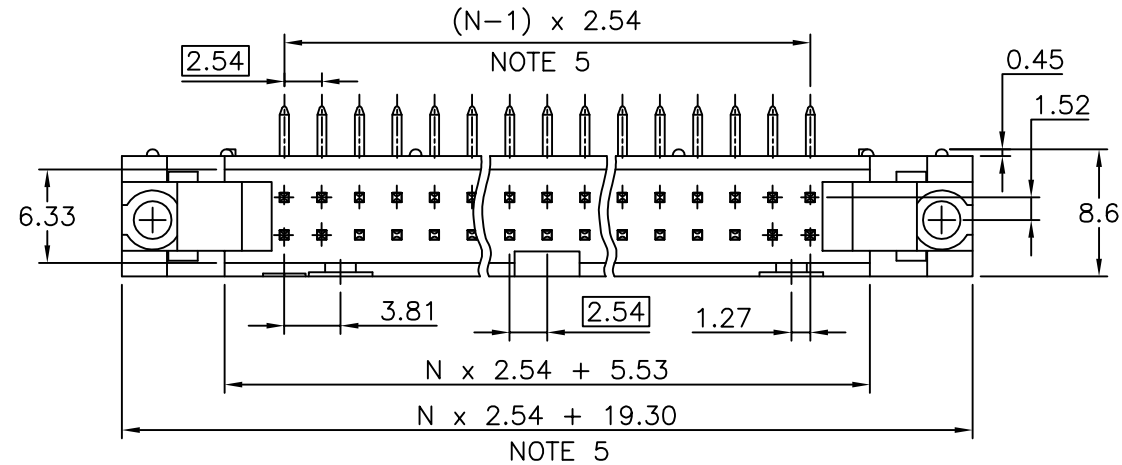

mat'l. code				surface ISO 1302 ☒		tolerance ISO 406 ISO 1101		projection 		product family QUICKIE									
ltr	ecn no	dr	date	tolerances unless		otherwise specified			title QKIE HEADER RA 0.05μm Au										
A	F08-0149	LMU	08.03.27	angles	linear	.X ±0.3			scale 2:1										
						.XX ±0.13													
						.XXX ±0.05													
				dr	J.COMPAGNON		08.03.07		dwg no		sheet 1 of 1				size				
				engr	L.MULIN		08.03.07		10087120		A3								
				chr															
				appd	L.MULIN		08.03.07		type		CUSTOMER Drawing								
sheet index		revision																	
		sheet																	