
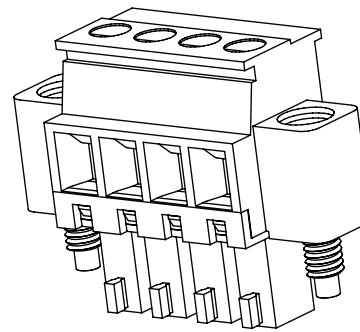
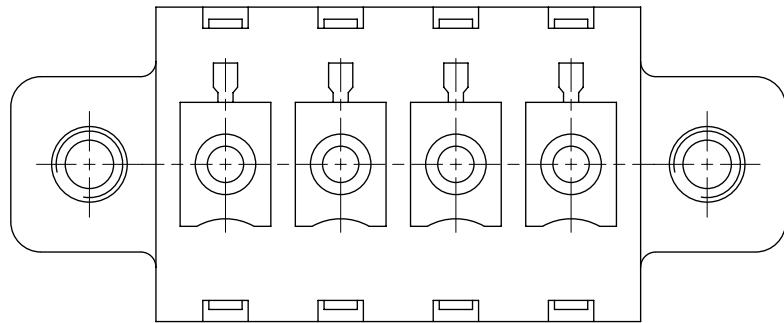
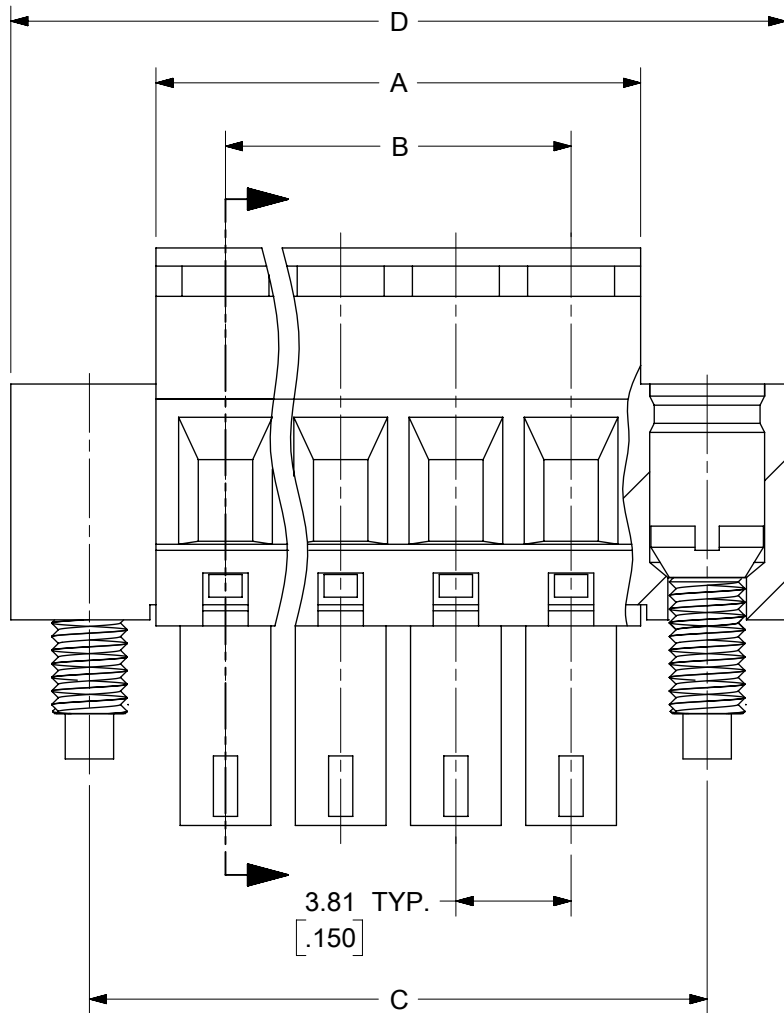
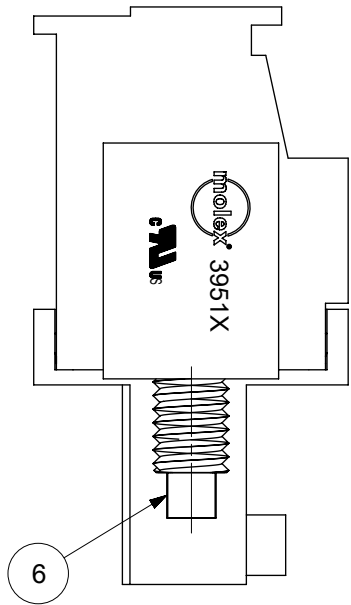


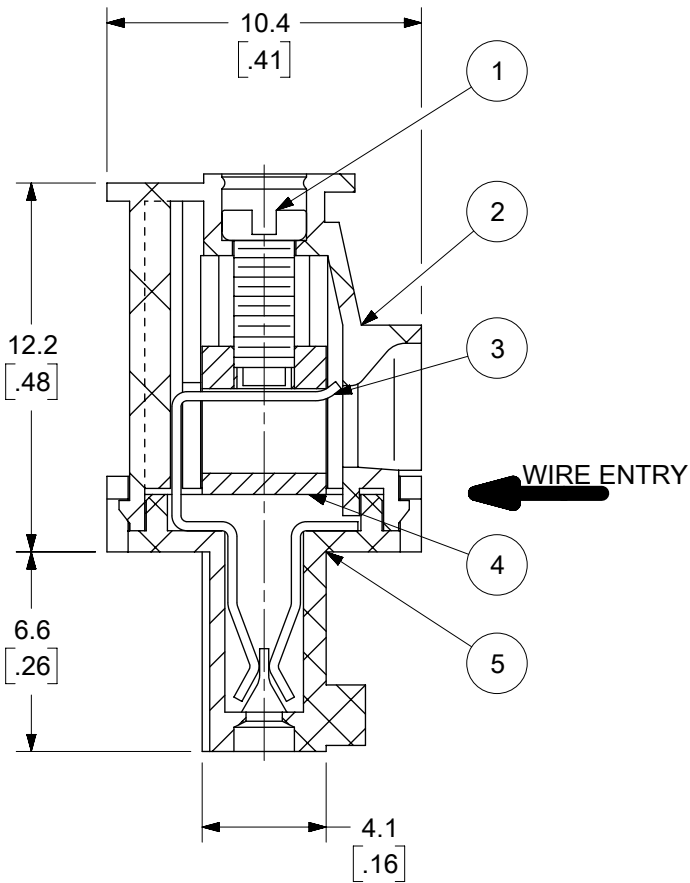

4 CIRCUIT SHOWN

SPECIFICATIONS:

1. MATERIAL:

- (1). SCREW: ZINC PLATED STEEL
- (2). BODY: PA 66 (UL94-V0)
- (3). TERMINAL: TIN PLATED PHOSPHOR BRONZE
- (4). CAGE: NICKEL PLATED BRASS
- (5). COVER: PA 66 (UL94-V0)
- (6). SCREW: ZINC PLATED STEEL

2. PRODUCT SPECIFICATION: PS-39500-001

3. WIRE RANGE: 30 - 16 AWG

4. TORQUE: 2 IN-LBS.

5. WIRE STRIP LENGTH: 6.50/.256

6. NUMBER OF CIRCUIT POSITIONS AVAILABLE = 2 THROUGH 20

TOLERANCES			
MM	TOL	INCH	TOL
0-6	±0.25	0-.24	±.010
>6-30	±0.40	>.24-1.18	±.016
>30-120	±0.50	>1.18-4.76	±.020
>120	±0.80	>4.76	±.031

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
⏏ = 0 ⏏ = 0 ⏏ = 0		DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED MATERIAL/PLATING NOTES FOR ITEMS 1-6. UPDATED MOLEX LATEST TITLE BLOCK				molex							
		MM/INCH		4:1													
		GENERAL TOLERANCES (UNLESS SPECIFIED)															
DIVISIONAL SYMBOLS				MM		INCH		EC NO: 833839 DRWN: MARUTD2025/09/02 CHK'D: DACHAMMER2025/09/10 APPR: HKNEELAND2025/09/15				3.81MM EURO TERM BLOCK VERT. PLUG FRONT WIRE ENTRY, MOUNTING ENDS					
		4 PLACES		± --- ± ---													
		3 PLACES		± --- ± SEE CHART													
		2 PLACES		± SEE CHART ± SEE CHART													
		1 PLACE		± SEE CHART ± ---													
		0 PLACES		± --- ± ---													
		ANGULAR TOL		± ---		INITIAL REVISION: DRWN: LROTHAUS2006/01/09 APPR: JPAWLICK2006/01/10				DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER			
						B-SIZE		39517		SEE SHEET-2		GENERAL MARKET		1 OF 2			

DOCUMENT STATUS	P1	RELEASE DATE	2025/09/15	21:55:16
-----------------	----	--------------	------------	----------

