




REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
A		PROPOSAL	MAR.11/16	L.CHAN

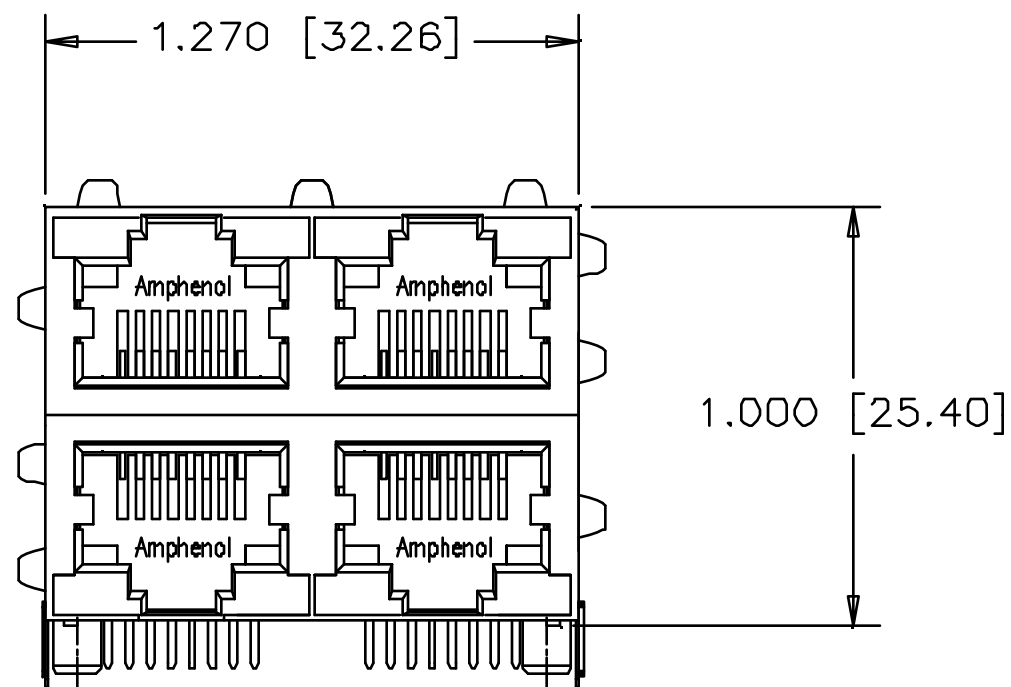


FRONT VIEW

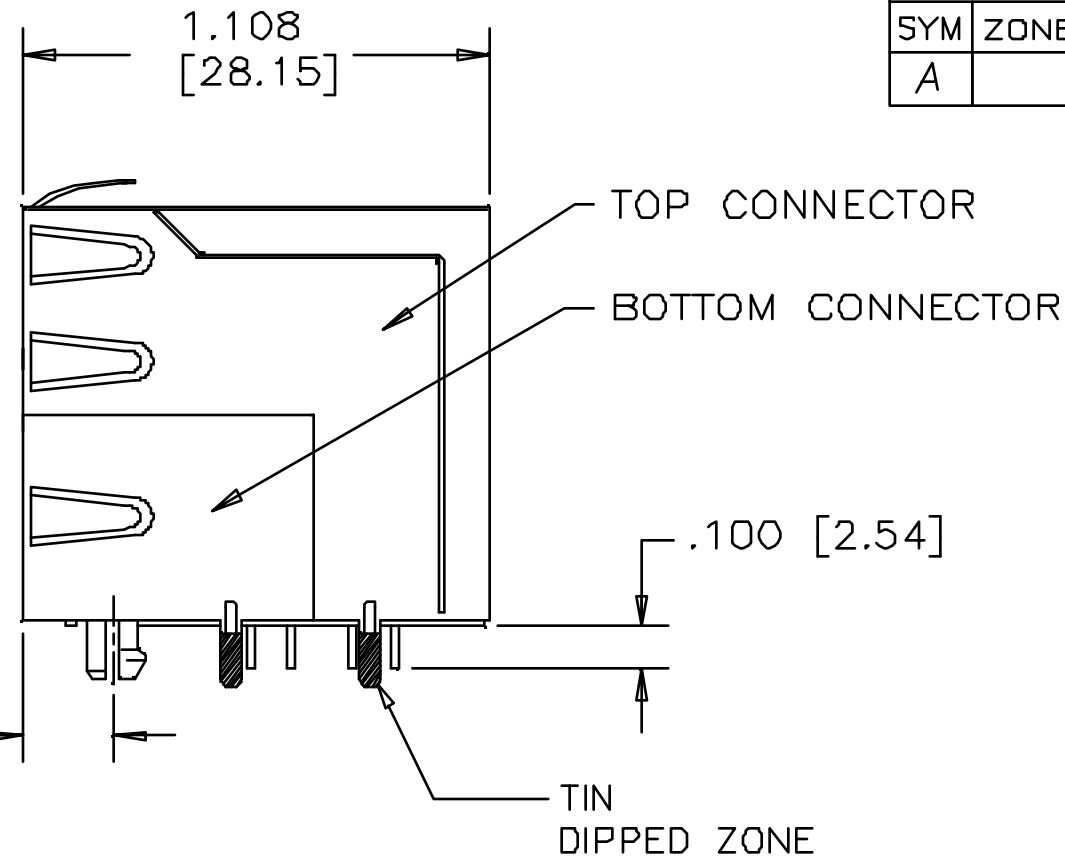

SIDE VIEW

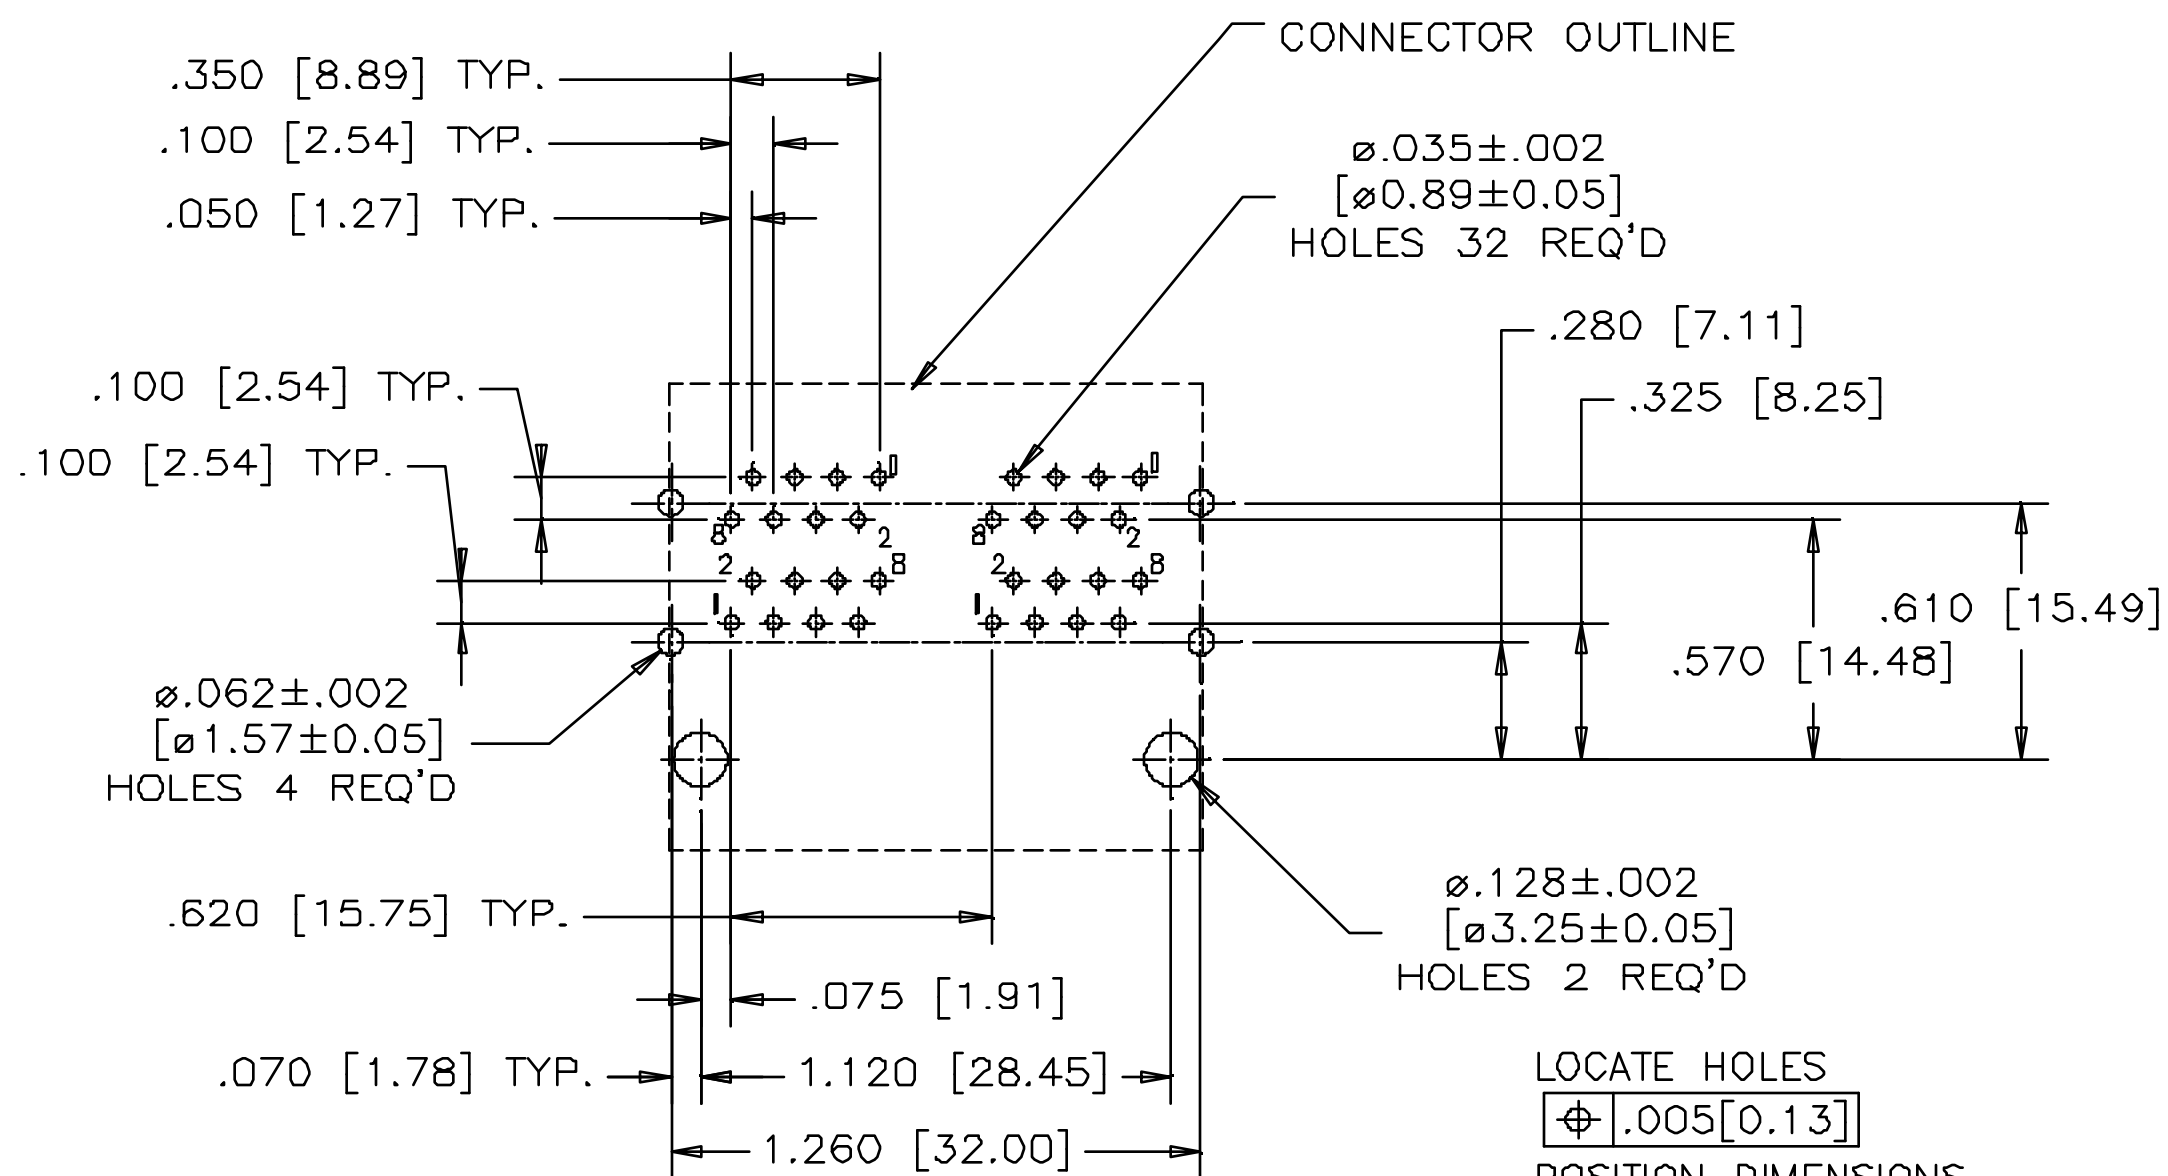

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

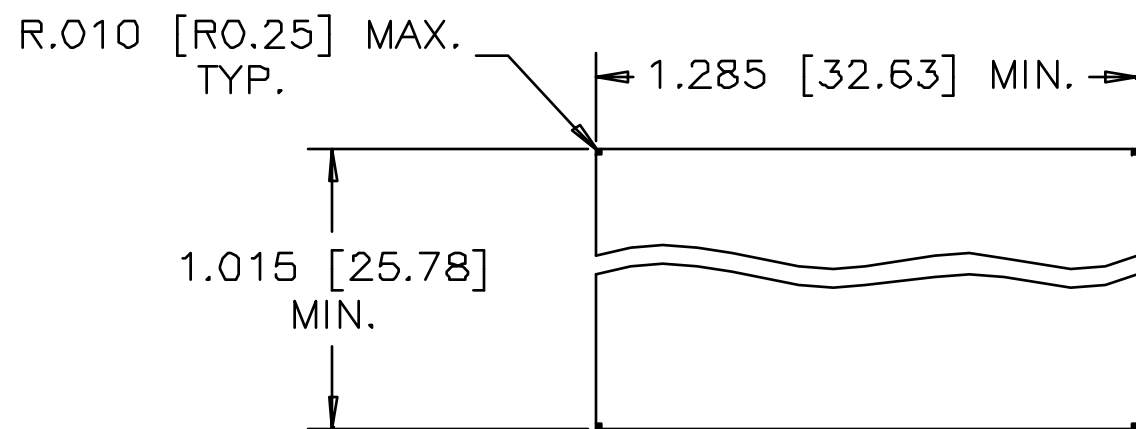

RECOMMENDED PANEL LAYOUT

MATERIALS

CONTACTS: PHOSPHOR BRONZE, SELECTIVELY PLATED WITH 50 MICROINCHES MIN. GOLD ON MATING AREAS. 50 MICROINCHES MIN. NICKEL OVERALL. 100 MICROINCHES MIN. MATTE TIN OR GOLD FLASH ON TAILS.

HOUSING: HIGH TEMPERATURE THERMOPLASTIC FLAMMABILITY RATING UL 94V-0, BLACK

SHIELD: COPPER ALLOY.
PLATING: NICKEL WITH TIN DIPPED PCB TAILS.

RECOMMENDED SOLDERING TEMPERATURE:

WAVE SOLDER, PEAK TEMPERATURE 260°C FOR 10 SEC.

AMPHENOL PART NO.: RJSAE-X380-04

GOLD PLATING OPTION:
D=6u" GOLD PLATING
G=15u" GOLD PLATING
J=30u" GOLD PLATING
5=50u" GOLD PLATING

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

DRAWN JACK.GUO	DATE MAR.11/16	Amphenol Canada Corp.		
DESIGNED		TITLE		
CHECKED LCHAN	MAR.11/16	STACKABLE, 2X2 PORT, MODULAR JACK 8 POSITION, 8 CONTACTS, SHIELDED, WITHOUT LEDS - RoHS COMPLIANT		
I. E. APPRD.		DWG DRAWING NO.		
Q. A. APPRD.		P-RJSAE-X380-04		
DWG. APPRD.		REV. A		
ENG. REL NO.		SCALE	WT. -----	SURF. -----
REF.				
DIMENSIONS ARE IN INCHES [mm]	CODE ID. NO. 03554			SHEET 1 OF 1