

()

()


Amphenol
FCi

()

© 2016 APCI

()



D

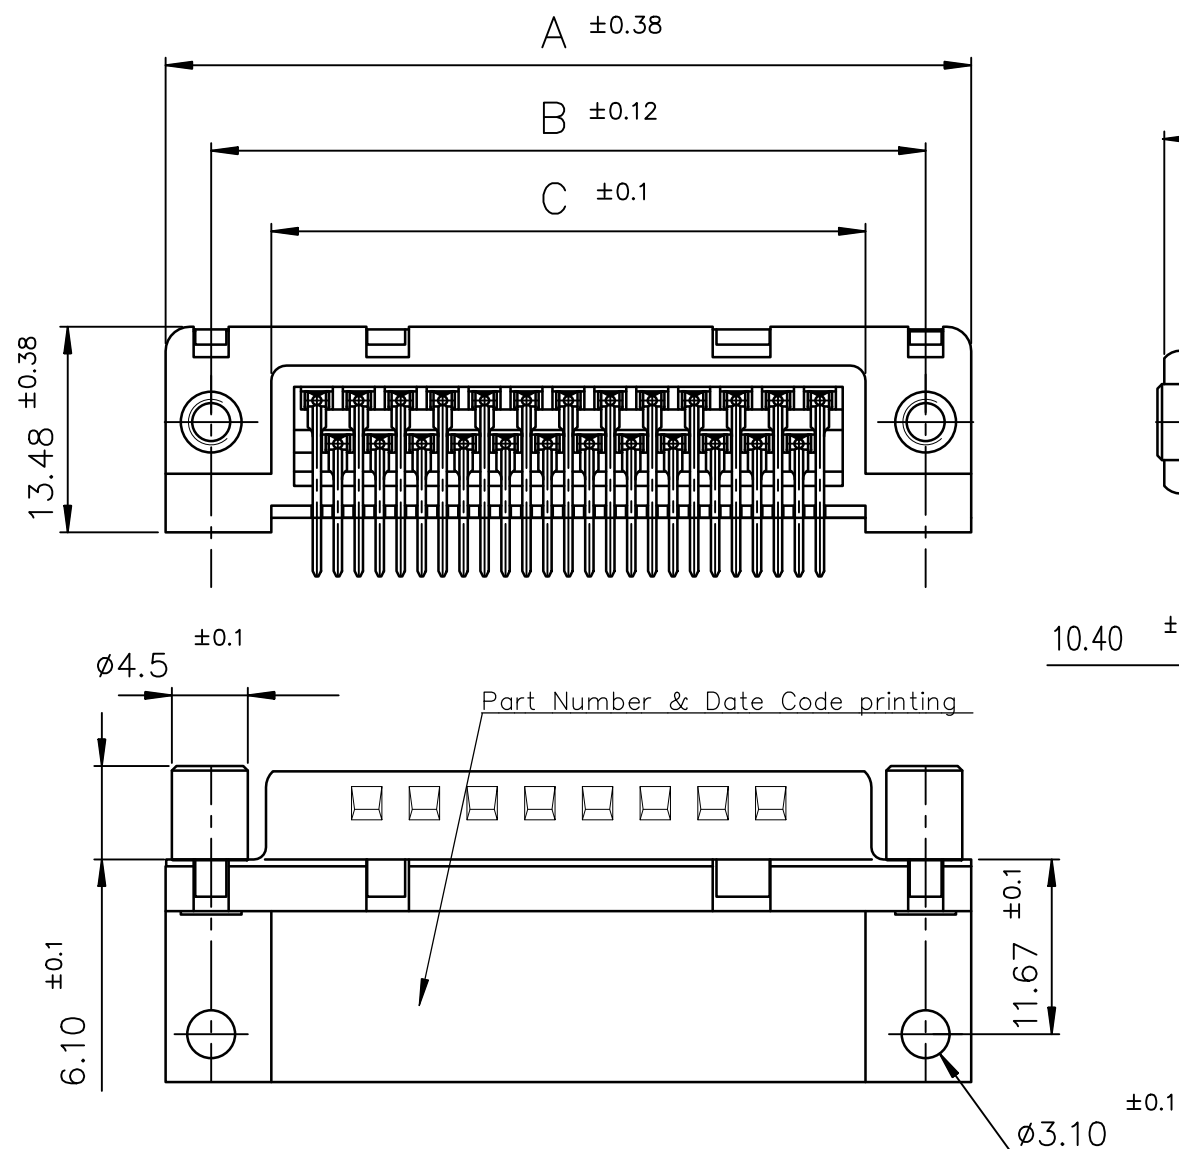


PART NUMBER

SHELL	A ± 0.38	B ± 0.12	C ± 0.10	D ± 0.25	G ± 0.25	E ± 0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	5.90	10.96	D09P13A*PV00LF
15	39.14	33.32	25.18	25.12	5.90	19.18	D15P13A*PV00LF
25	53.03	47.04	39.12	38.84	5.70	33.12	D25P13A*PV00LF
37	69.32	63.50	55.68	55.30	5.70	49.68	D37P13A*PV00LF

4 - 200 MATING CYCLES
6 - 500 MATING CYCLES

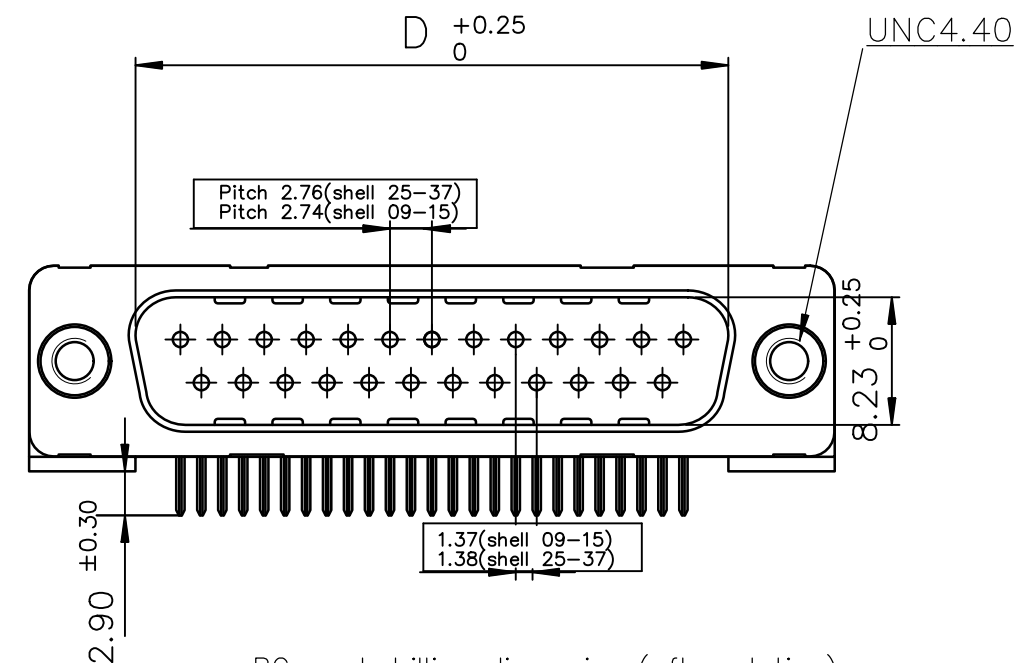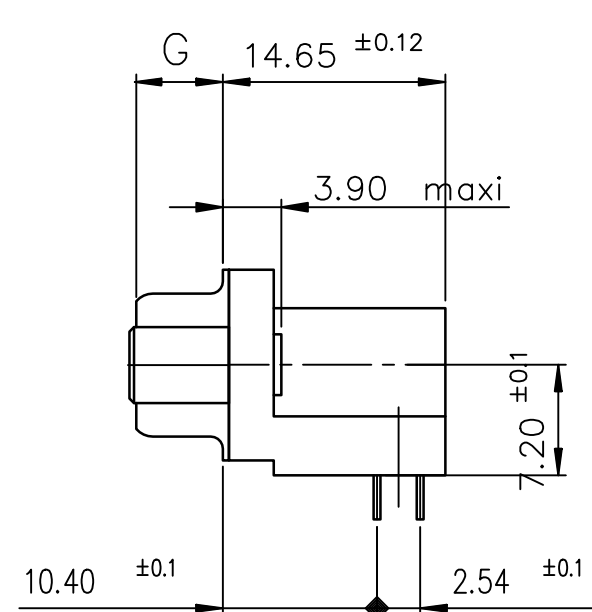

PC card drilling dimensions(after plating)
(thickness 1.60 ± 0.20 mm)

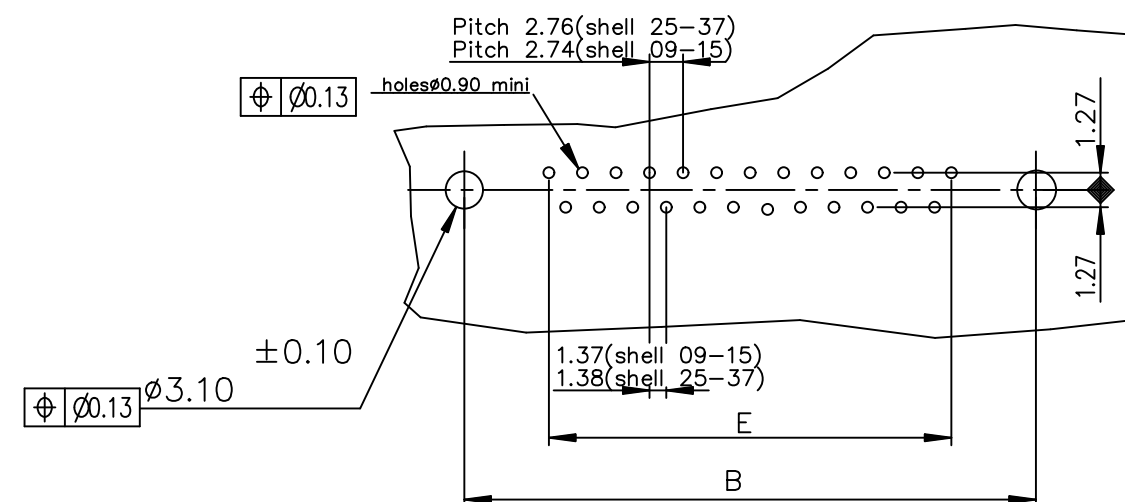

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

mat'l. code SEE NOTES				surface ISO 1302 ☒	tolerance ISO 406 ISO 1101	projection 	product family D-SUB			
ltr	ecn no	dr	date	tolerances unless otherwise specified			title			
D	ELX-I-21807	AB	2015-08-31	angles	.0 ± 0.3		DELTA-D MALE RIGHT ANGLE WITH FEMALE SCREW			
E	ELX-I-281390	GM	2026-03-10	linear	.00 ± 0.10	MM				
				0 $\pm 2^\circ$	.000 ± 0.100	scale 2:1	dwg no sheet 1 of 1 size			
				dr	JOHN SLEEBA 1996-09-10	Amphenol FCi	C01-8646-0484 A3			
				enr	GREGAR M 2026-03-10					
				chr	GREGAR M 2026-03-10					
				app	ALEX BABU 2026-03-10		type Product Customer Drawing			
sheet index	revision	E								
	sheet	1								