

4


3

2

1

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H3	REVISED PER ECR-25-255998	15SEP2025	SA	DSC

 WIRE RANGE	 Listed	 LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

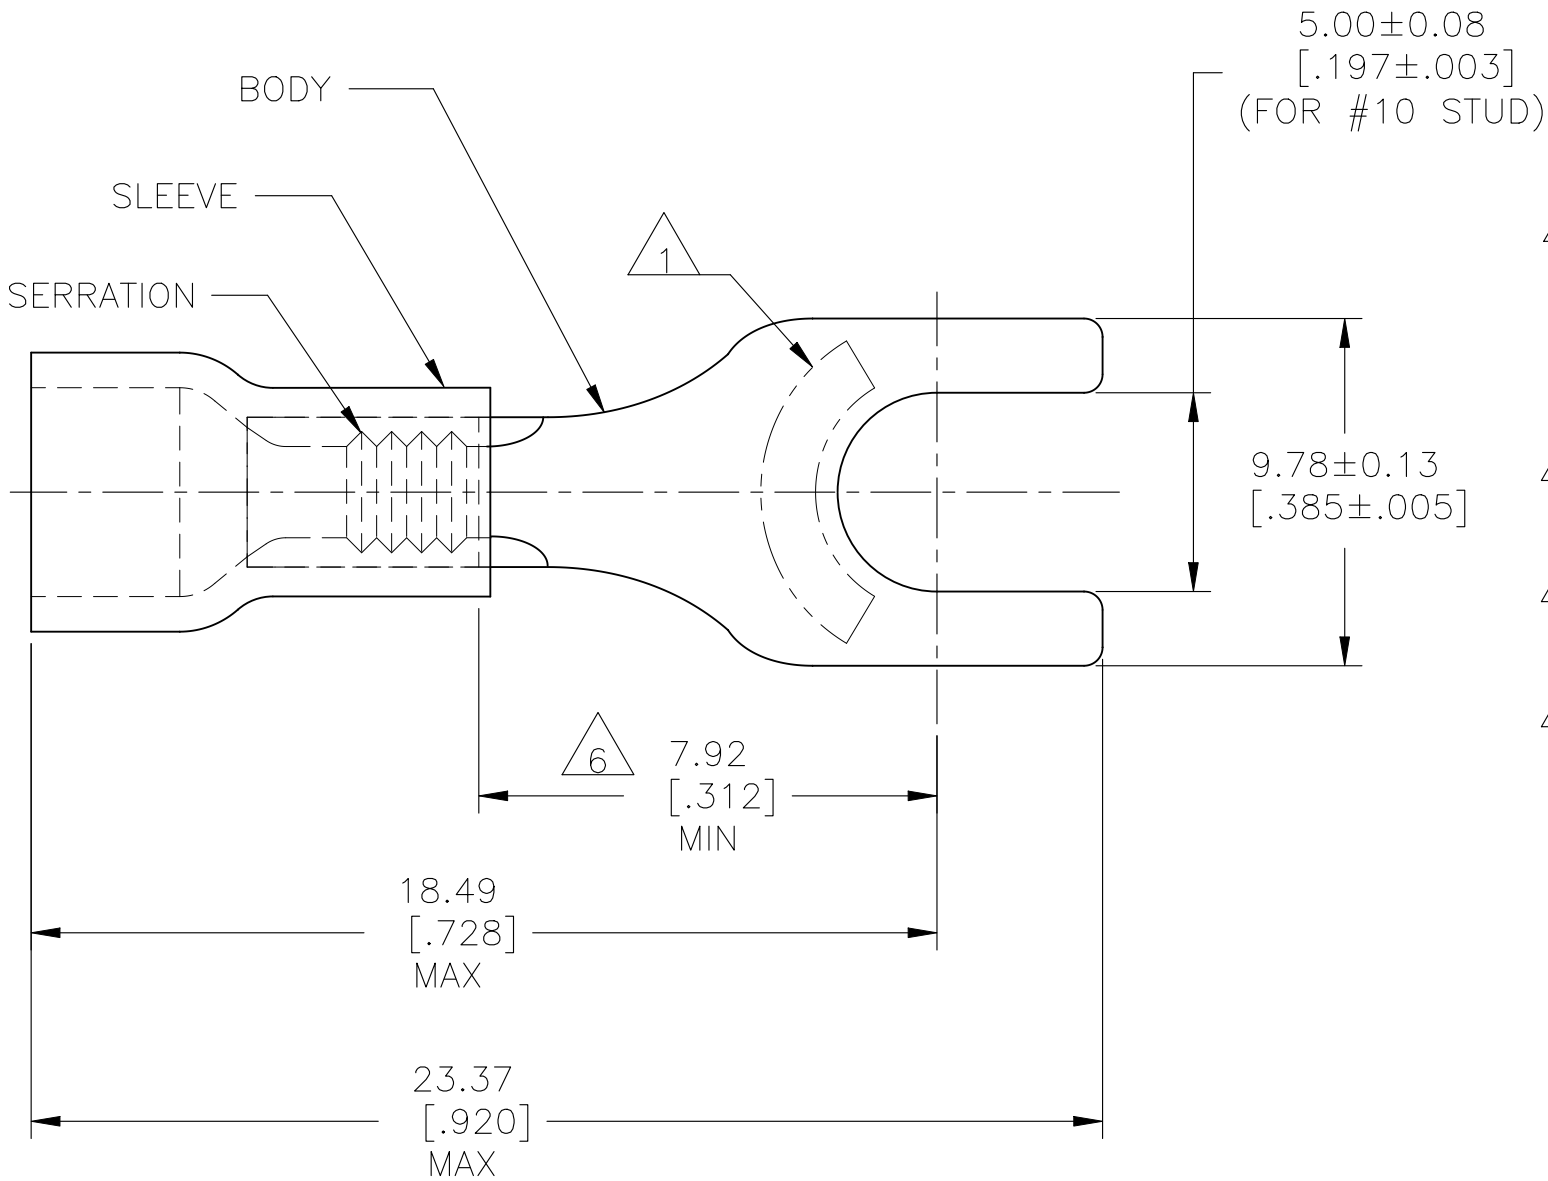


- 1 STAMP AMP 16-14* LOCATE APPROX AS SHOWN.
- 2 WIRE INSULATION DIA: 3.00-4.90 [.118-.193].
- 3 TONGUE MATERIAL THICKNESS: 0.79±0.05 [.031±.002].
- 4 MATERIAL: BODY - CU PER ASTM B152
SLEEVE - PVC, COLOR - BLUE.
- 5 FINISH: BODY - TIN PLATE PER ASTM B545,
0.00254[.000100] MIN EXT. THICKNESS.
- 6 APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE.

100	LOOSE PIECE, BOX	8-34167-1
1 KIT = 250 PIECES	LOOSE PIECE	6-34167-0
5000	ON TAPE, REEL	2-34167-1
1000	LOOSE PIECE	34167
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	VOLTAGE RATING: 600V MAX (1000V FIXTURE OR SIGN)
FOR ORDER ENTRY	1-800-526-5142	CIRCULAR MIL AREA: 1.04-2.62mm²[2,050-5,180] SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G VINSON 07NOV94		TE Connectivity					
		CHK M ELLIS 07NOV94							
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME TERMINAL, SPADE, PLASTI-GRIP, WIRE SIZE: 16-14 AWG					
		0 PLC ± -							
		1 PLC ± -							
		2 PLC ± 0.20 [.008]							
		3 PLC ± -		SIZE A3					
		4 PLC ± -					CAGE CODE 00779		
		ANGLES ± -							
				RESTRICTED TO —					
MATERIAL 		FINISH 					CUSTOMER DRAWING		
				SHEET 1 OF 1					
							REV H3		