
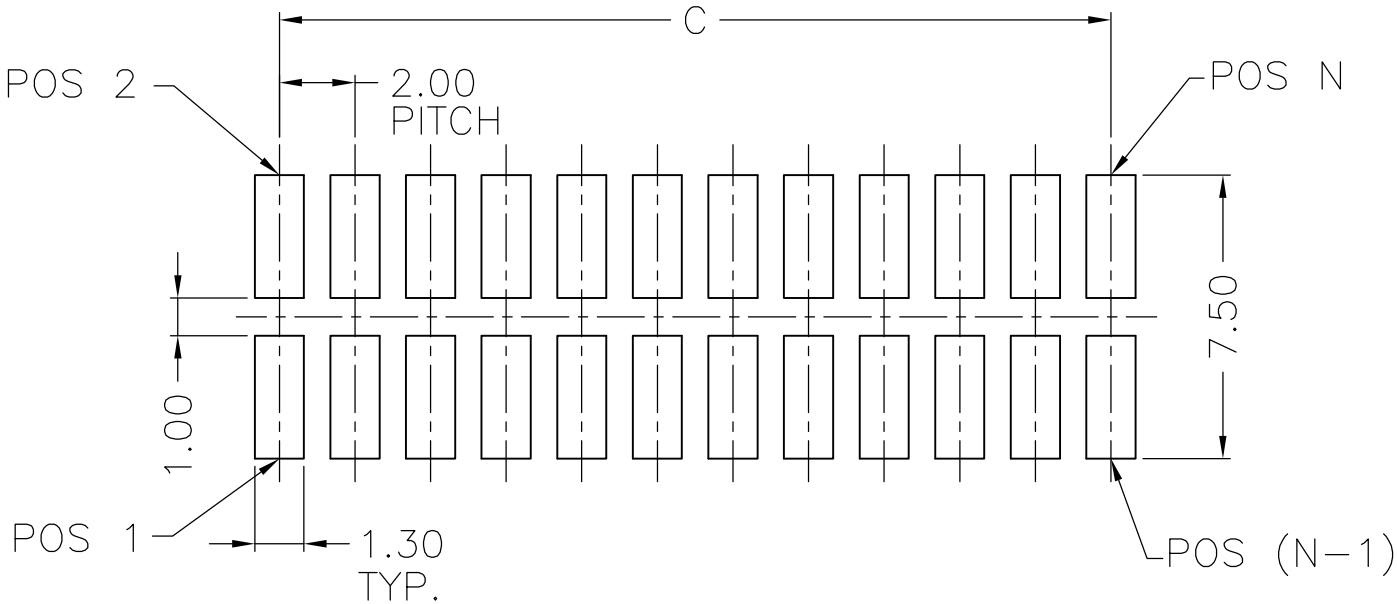
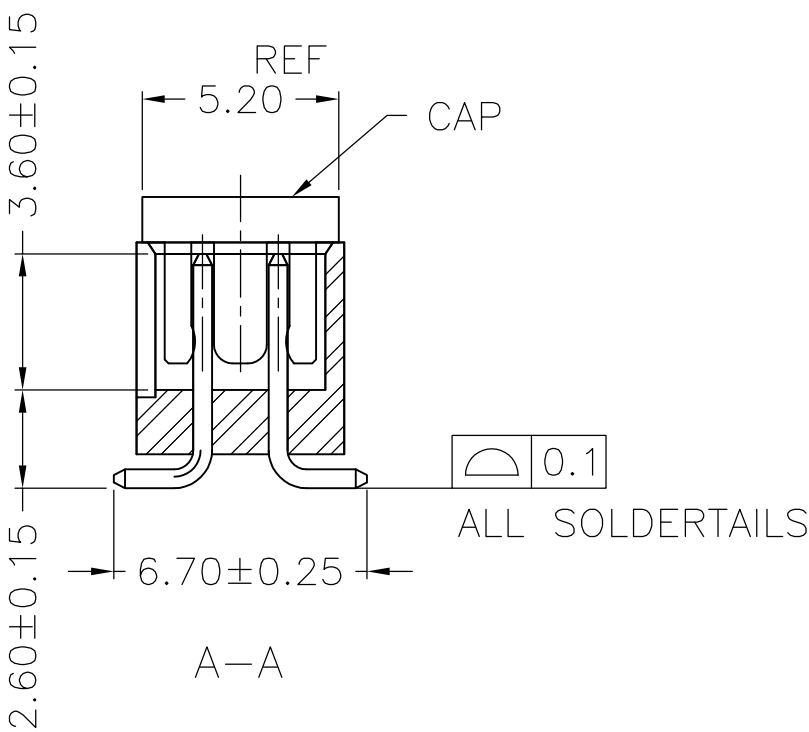
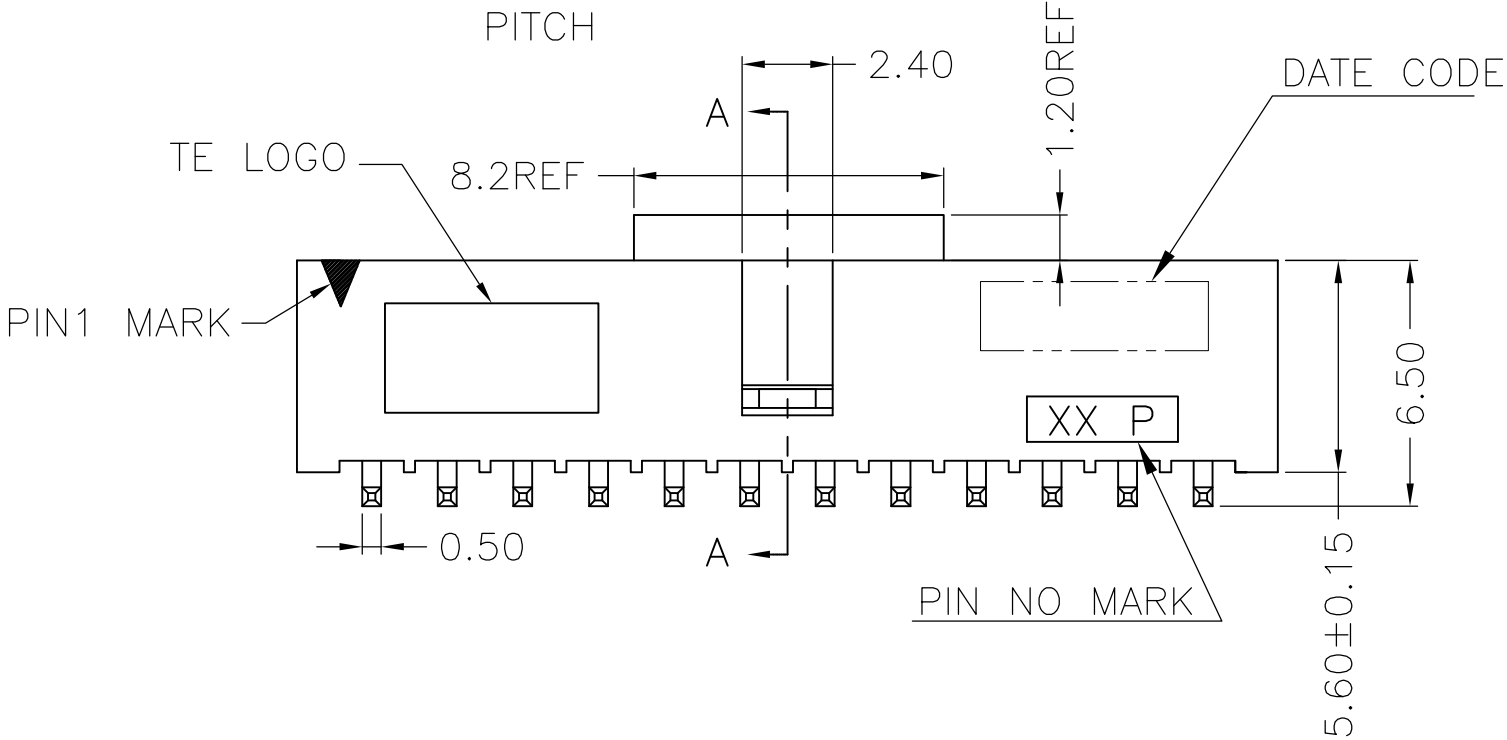


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—		B1	REVISED PER ECO-13-012238	31JUL2013	KH	JO

- NOTE:
1. MATERIAL:
HOUSING: PA9T (NYLON 9T), UL 94V-0, COLOR: BLACK.
CONTACT: PHOSPHOR BRONZE
CAP: PA6T (NYLON 6T), UL 94V-0, COLOR: BLACK.
2. FINISH:
CONTACT: Au 0.762um [30u"] MIN. AT THE CONTACT AREA.
MATTE Tin 2.54um [100u"] MIN. AT THE SOLDER TAIL AREA.
Ni 1.27 um [50u"] MIN. UNDER PLATED ALL OVER
3. REFLOW SOLDER CAPABLE TO 260°C PER TE TEST SPEC.
109-201, CONDITION B.






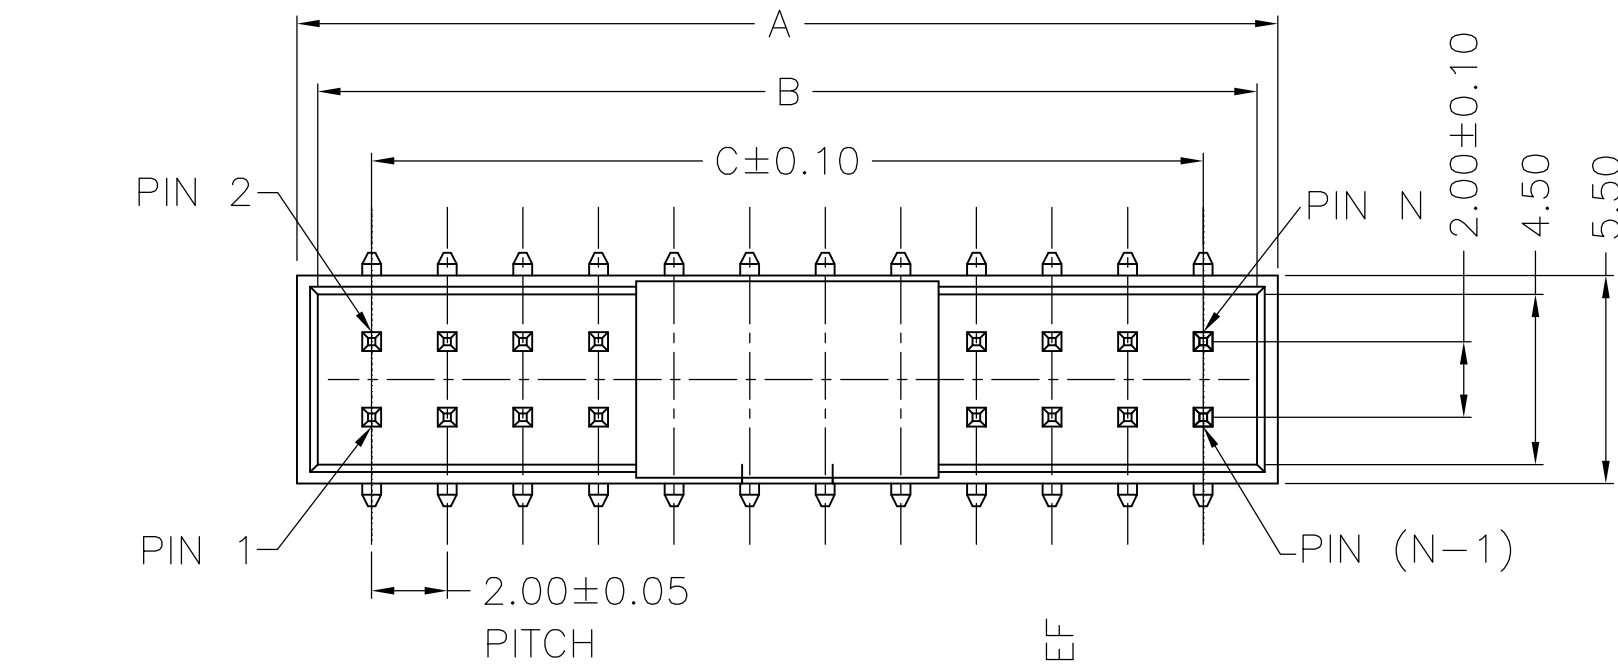


RECOMMENDED PCB LAYOUT
TOLERANCE ±0.05

48.0	50.85	51.95	50	5-2041068-0
46.0	48.85	49.95	48	4-2041068-8
44.0	46.85	47.95	46	4-2041068-6
42.0	44.85	45.95	44	4-2041068-4
40.0	42.85	43.95	42	4-2041068-2
38.0	40.85	41.95	40	4-2041068-0
36.0	38.85	39.95	38	3-2041068-8
34.0	36.85	37.95	36	3-2041068-6
32.0	34.85	35.95	34	3-2041068-4
30.0	32.85	33.95	32	3-2041068-2
28.0	30.85	31.95	30	3-2041068-0
26.0	28.85	29.95	28	2-2041068-8
24.0	26.85	27.95	26	2-2041068-6
22.0	24.85	25.95	24	2-2041068-4
20.0	22.85	23.95	22	2-2041068-2
18.0	20.85	21.95	20	2-2041068-0
16.0	18.85	19.95	18	1-2041068-8
14.0	16.85	17.95	16	1-2041068-6
12.0	14.85	15.95	14	1-2041068-4
10.0	12.85	13.95	12	1-2041068-2
8.0	10.85	11.95	10	1-2041068-0
6.0	8.85	9.95	8	2041068-8
DIM.C	DIM.B	DIM.A	POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. CHIEN 18AUG2008	 TE Connectivity	
DIMENSIONS: mm		CHK S. CHIEN 18AUG2008		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD W. KODAMA 18AUG2008	NAME	
0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± - 4 PLC ± - ANGLES ± 3°		PRODUCT SPEC 108-57707 APPLICATION SPEC	AMPMODU 2.00mm PITCH,DUAL ROW, PLUG,SURFACE MOUNT	
MATERIAL SEE NOTE		WEIGHT -	SIZE A2	RESTRICTED TO -
FINISH SEE NOTE		CUSTOMER DRAWING	CAGE CODE 00779	DRAWING NO 2041068
		SCALE 1:1	SHEET 1 of 2	REV B1

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—		—	SEE SHEET 1	—	—	—

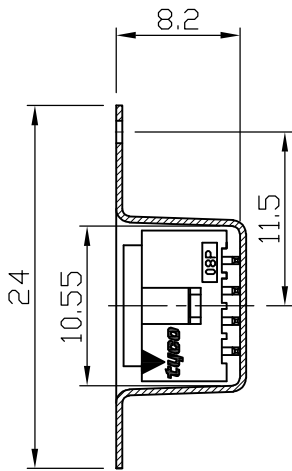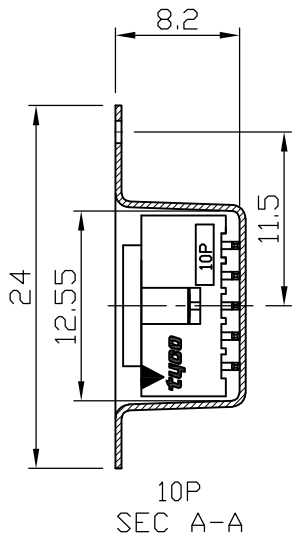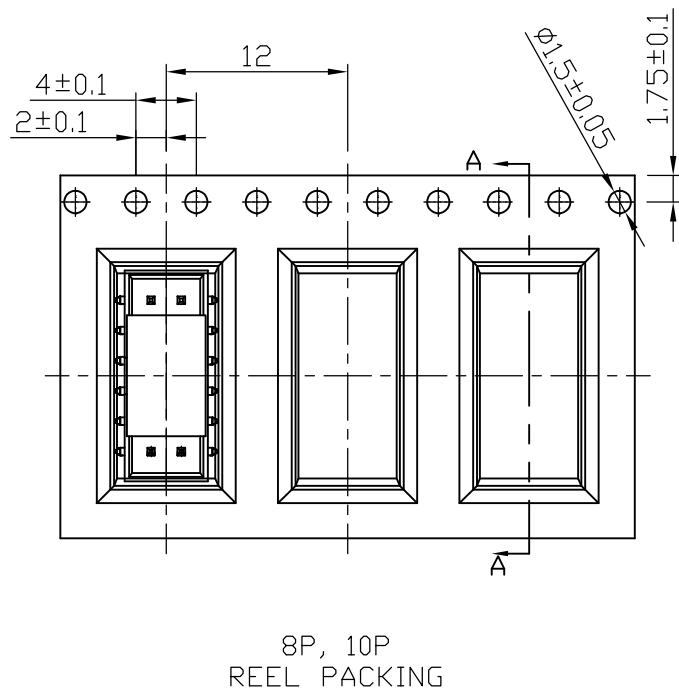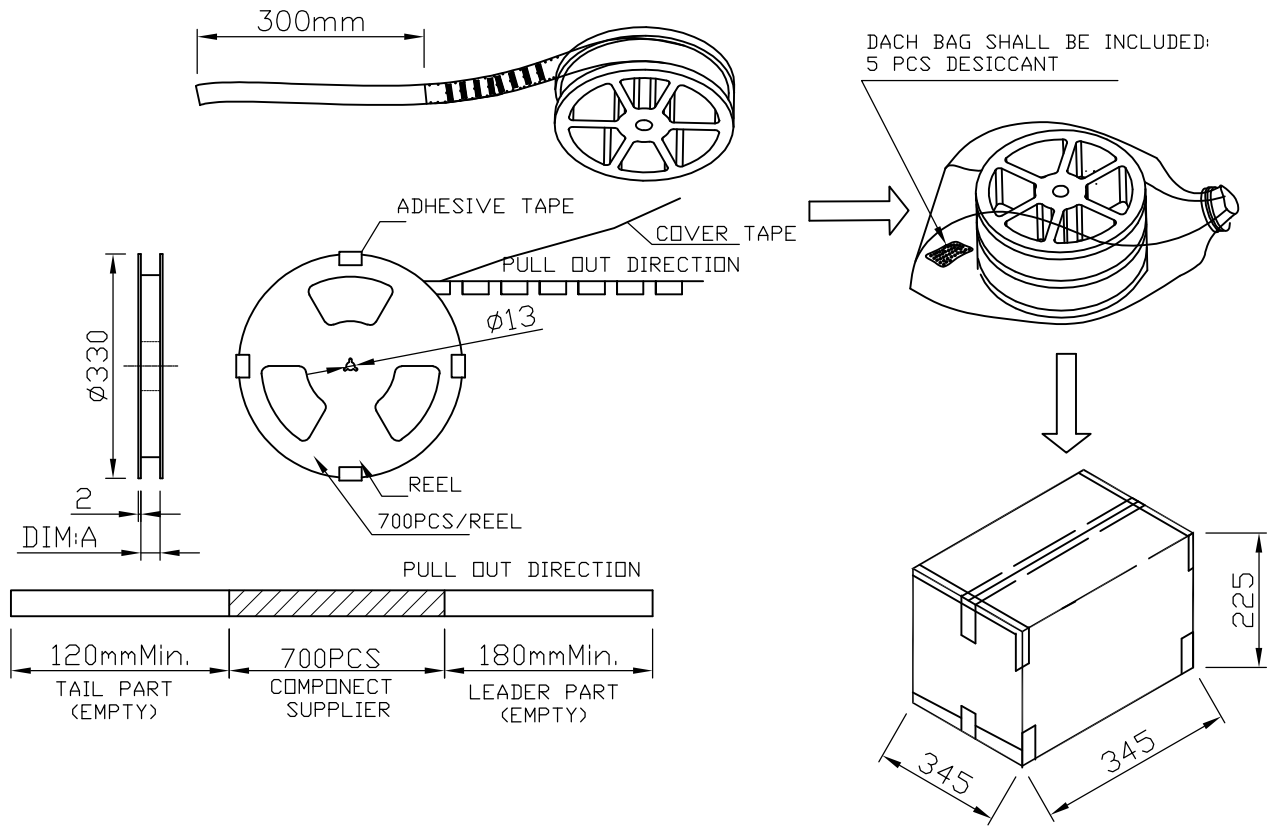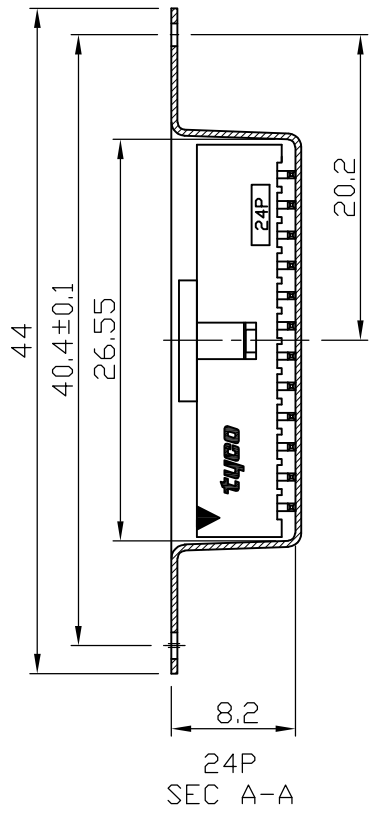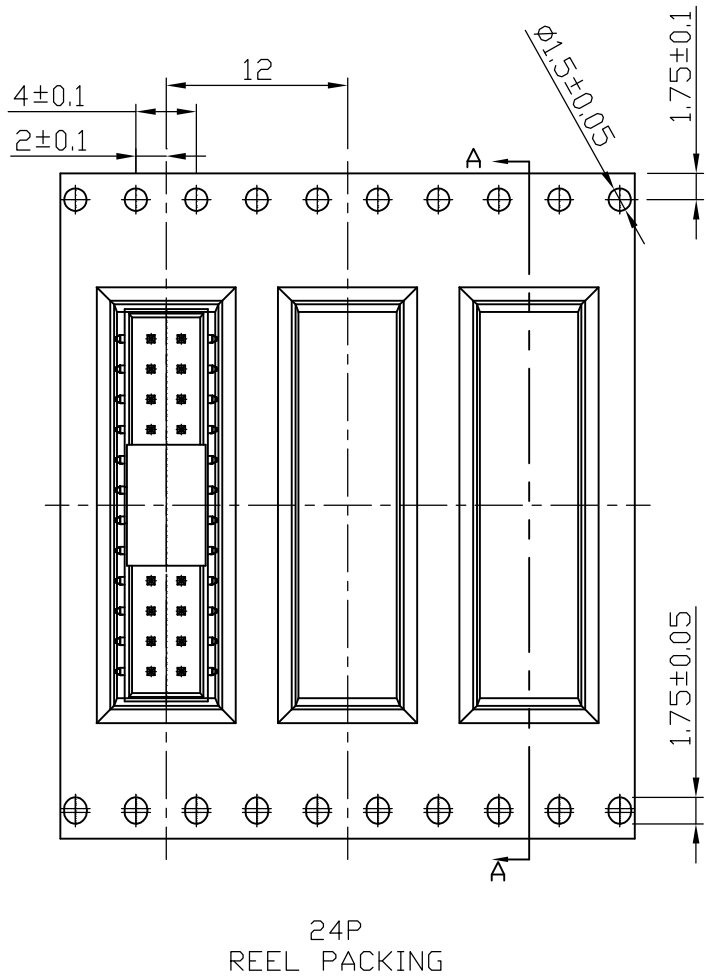

7.00	4.24	2.017	2100	3	265	72	68.4	34.2	72.5	50	5-2041068-0
6.85	4.09	1.946								48	4-2041068-8
6.70	3.94	1.876								46	4-2041068-6
6.55	3.79	1.805								44	4-2041068-4
6.40	3.64	1.735								42	4-2041068-2
7.50	4.66	1.664	2800	4	265	56	52.4	26.2	56.5	40	4-2041068-0
7.30	4.46	1.593								38	3-2041068-8
7.10	4.26	1.523								36	3-2041068-6
6.91	4.07	1.452								34	3-2041068-4
6.71	3.87	1.382								32	3-2041068-2
6.51	3.67	1.311	2800	4	265	44	40.4	20.2	44.5	30	3-2041068-0
6.07	3.47	1.240								28	2-2041068-8
5.88	3.28	1.170								26	2-2041068-6
5.68	3.08	1.099								24	2-2041068-4
5.48	2.88	1.029								22	2-2041068-2
5.28	2.68	0.958	3500	5	225	32	18.4	14.2	32.4	20	2-2041068-0
6.51	3.73	0.887								18	1-2041068-8
6.21	3.43	0.817								16	1-2041068-6
7.14	3.66	0.746								14	1-2041068-4
6.79	3.31	0.676								12	1-2041068-2
6.44	2.96	0.605	4900	7	225	24	11.5	24.5	24.5	10	1-2041068-0
6.10	2.62	0.534								8	2041068-8
KG/GROSS WEIGHT	KG/NET WEIGHT	g / WEIGHT	PCS / CARTON	REEL / CARTON	DIM.X	DIM.W	DIM.S	DIM.F	DIM.A	POS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES, UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.3
2 PLC ± 0.2
3 PLC ± -
4 PLC ± -
ANGLES ± 3°
FINISH

MATERIAL
SEE NOTE

SEE NOTE

DWN
S. CHIEN
18AUG2008

CHK
S. CHIEN
18AUG2008

APVD
W. KODAMA
18AUG2008

PRODUCT SPEC
108-57707

APPLICATION SPEC
-

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
-

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=2041068

RESTRICTED TO
-

SCALE
1:1

SHEET
2 of 2

REV
B1