

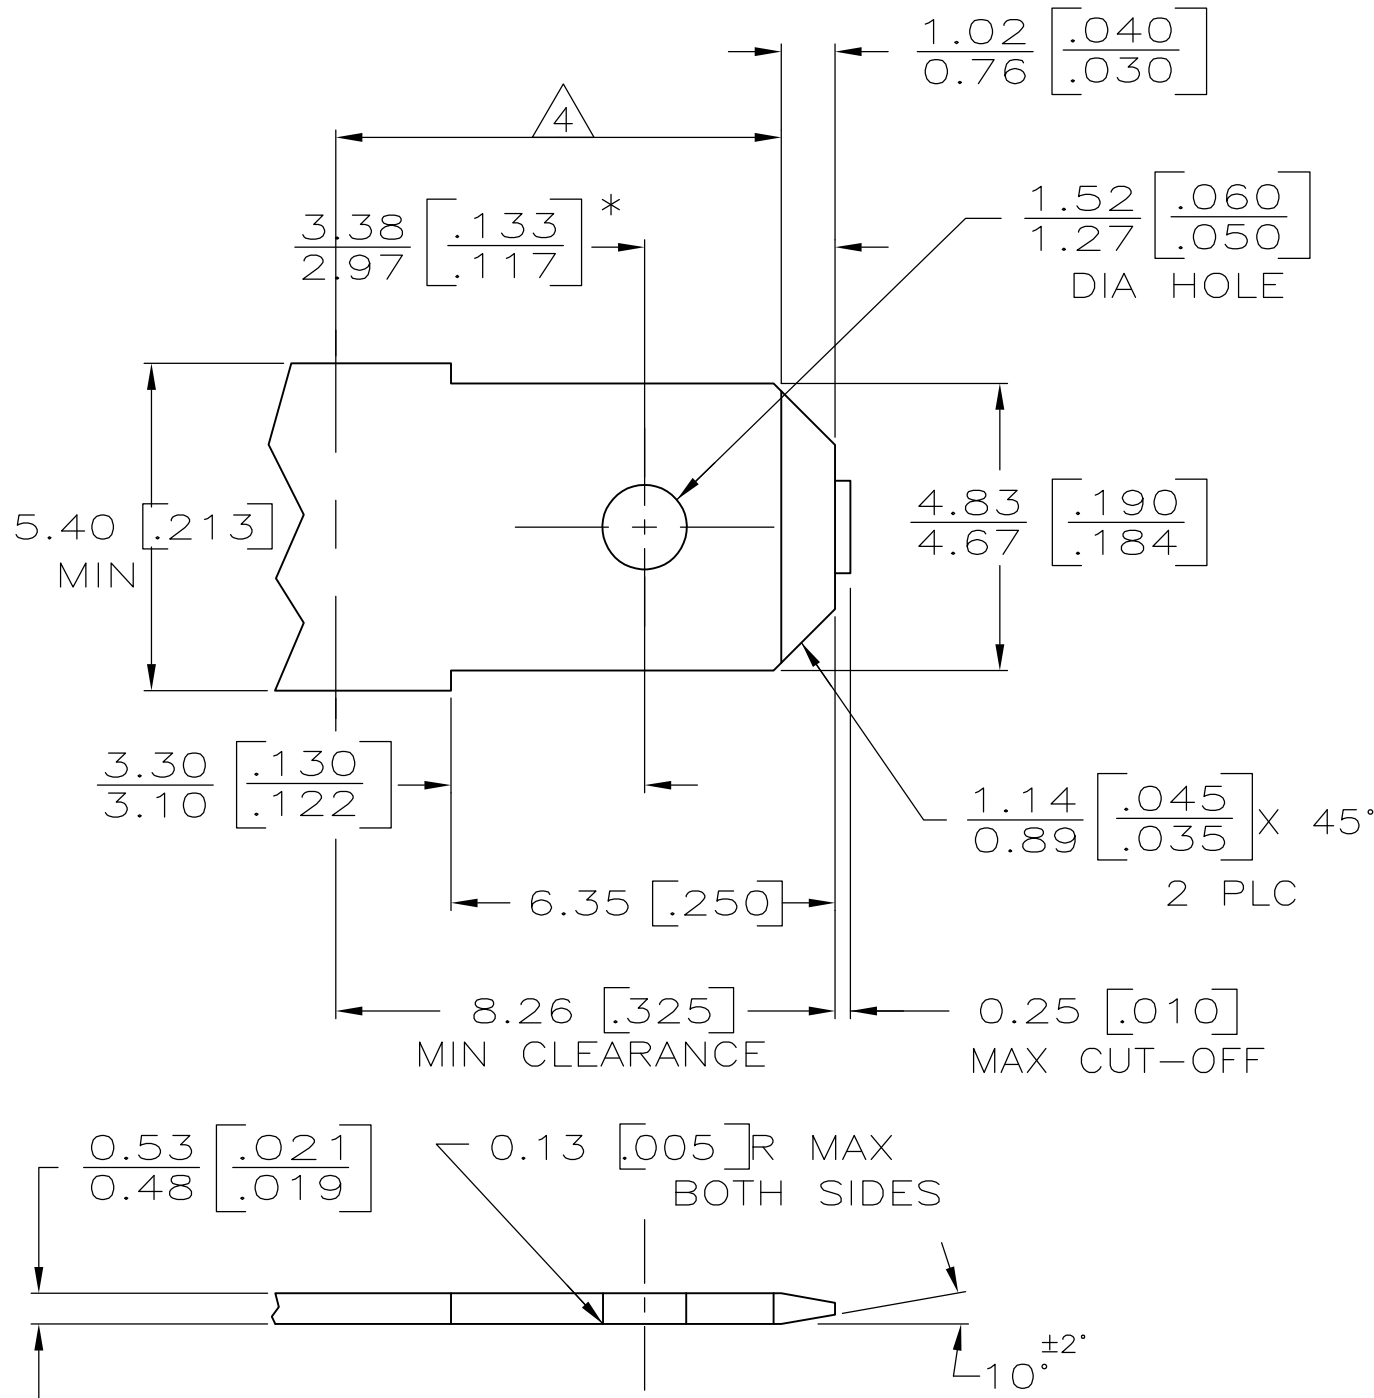
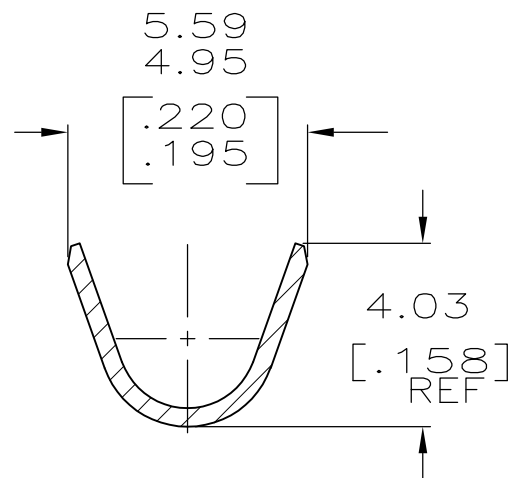
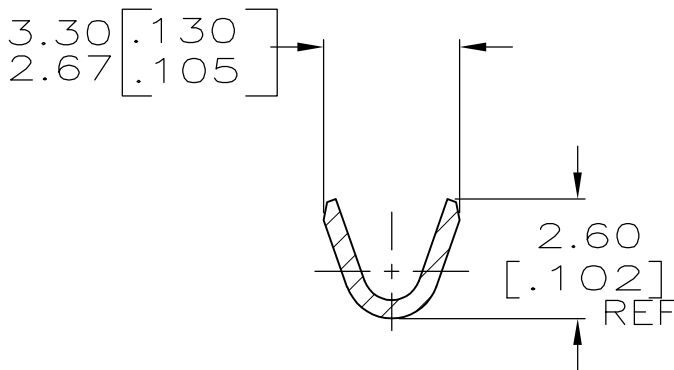
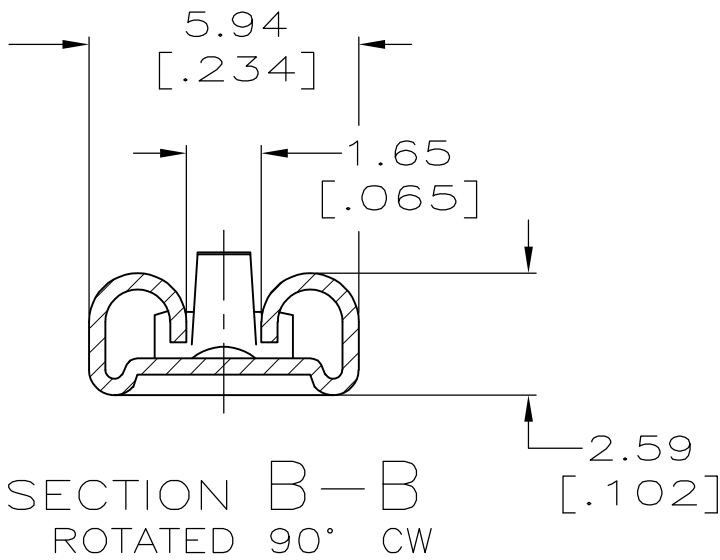


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
AF	50		E	REVISED PER ECR-12-013486	10JAN13	KH KR

SUGGESTED MATING TAB

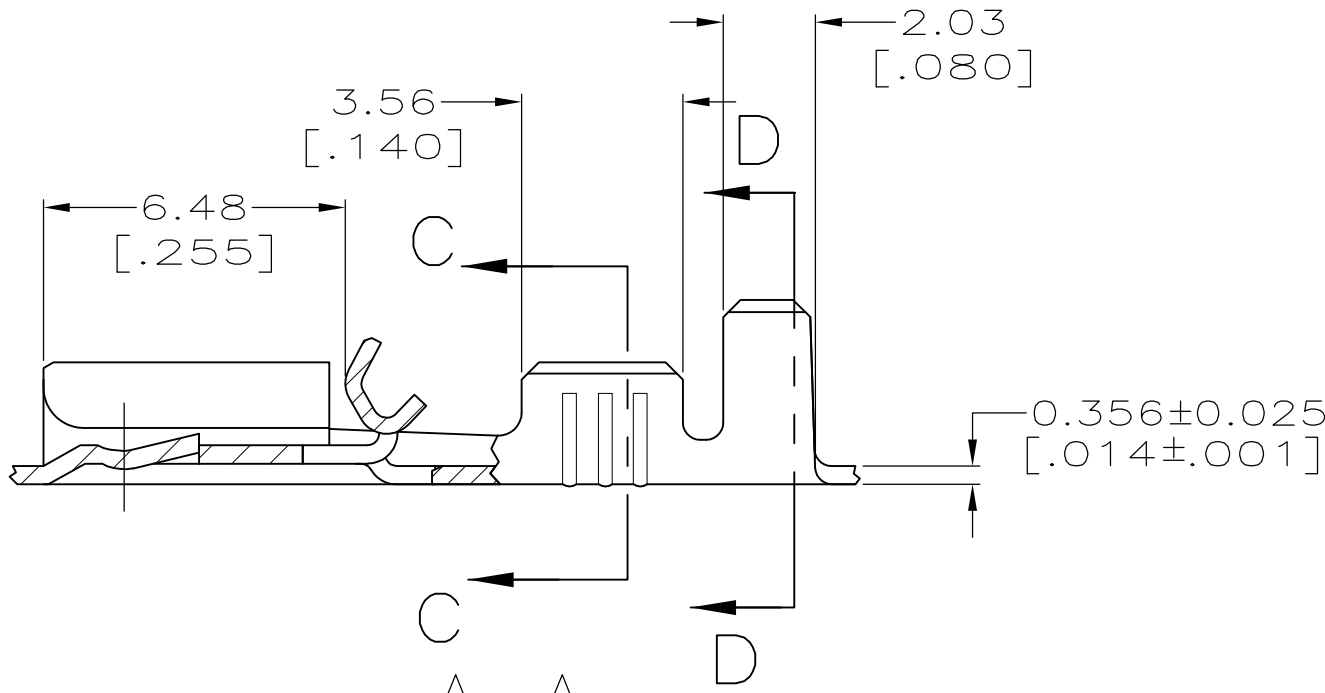

- 1 MATL: #2 HARD BRASS OR NICKEL PLATE STEEL.
 - 2 NO BURRS PERMISSIBLE AT HOLE.
 - 3 TIN PLATING IS REQUIRED ON BRASS WHEN TERMINAL TEMPERTURE IS OVER 225°F
 - 4 MUST BE FLAT WITHIN 0.076 [.003] OVER THIS LENGTH.
 - 5 HOLE MUST BE SYMMETRICAL ABOUT TAB ϕ WITHIN 0.076 [.003] .
- * TO BE USED ONLY WHEN SHOULDER IS ELIMINATED.

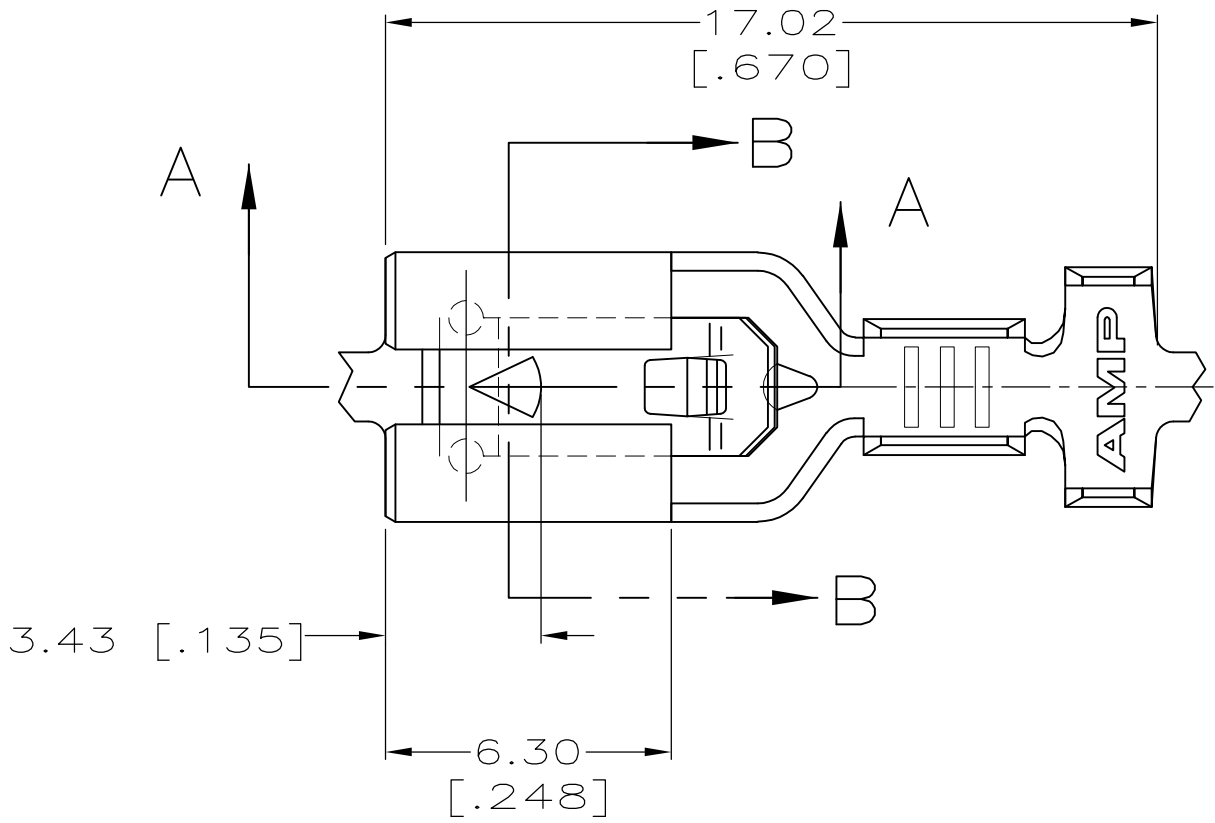

SECTION C-C

SECTION D-D

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	JR RUTH	9/17/98	TIN		1217113-2
DIMENSIONS: mm [INCHES]		CHK	MS FEHER	9/17/98	-		1217113-1
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	E HOWARD	9/17/98	FINISH		PART NO.
0 PLC ± -		PRODUCT SPEC	-	-	TE Connectivity		
1 PLC ± -		APPLICATION SPEC	-	-			
2 PLC ± 0.25 [.010]		WEIGHT	-	-	RECEPTACLE, POSITIVE-LOCK, MARK III, 4.75 [.187] SERIES		
3 PLC ± -		CUSTOMER DRAWING	-	-	SIZE	CAGE CODE	DRAWING NO
4 PLC ± -		SCALE	6:1	SHEET	1 OF 1	REV	E
ANGLES ± -		FINISH	SEE TABLE	-	-	-	-
MATERIAL		-	-	-	-	-	-
BRASS		-	-	-	-	-	-