
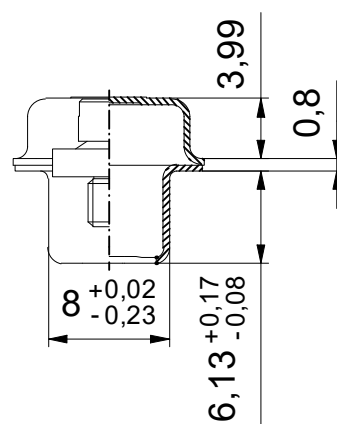
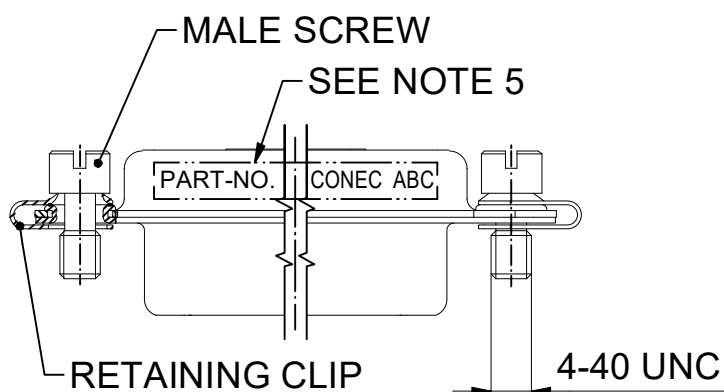


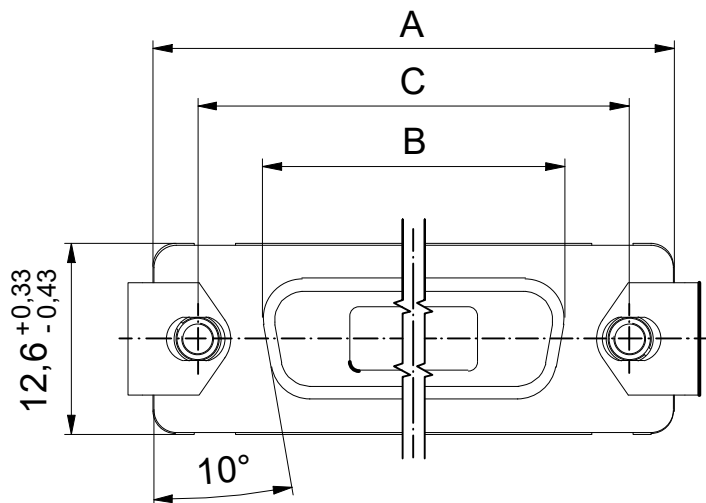

POS.	A -0.76	B -0.25	C	Part-No. Bulk Package	Part-No. Single Package
9	31,19	16.46	25,00 ^{+0,12} _{-0,13}	165X16769X	165X16769XE
15	39,52	24.79	33,30 ^{+0,15} _{-0,1}	165X16779X	165X16779XE
25	53,42	38.50	47,04 ± 0,13	165X16789X	165X16789XE
37	69,70	54.96	63,50 ± 0,13	165X16799X	165X16799XE

NOTES:


1. SCREEN CAP: STEEL; TIN PLATED
2. MALE SCREWS: BRASS; NICKEL PLATED
3. RETAINING CLIPS: STAINLESS STEEL
- ⑨ 4. TEMPERATURE RANGE: - 55 °C to + 125 °C
5. CONNECTOR IS PART MARKED: PART-NO. CONEC ABC

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

g	a	rev.	description	date	name
				06.02.2026	JLE
	original				

tolerance



dim. in mm

Amphenol
— CONEC

scale:	2:1	
material:	SEE NOTES	
title:	COVERED SCREEN CAP 9-37pos. for plug connector ABSCHIRMKAPPE 9-37pos. für Stiftsteckverbinder	
dwg no:	16K1A186A	DIN-A4
part no:	SEE TABLE	
		sh: 1