
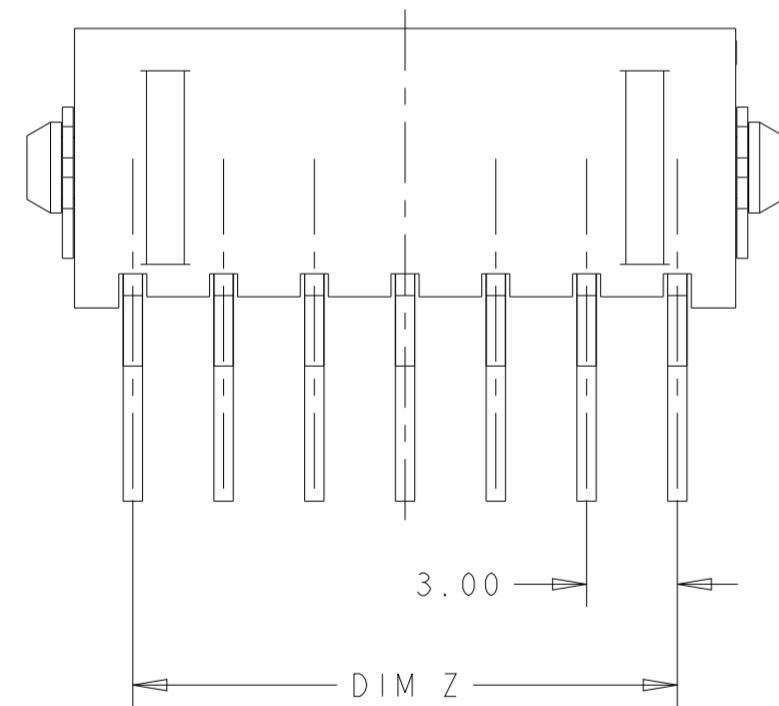
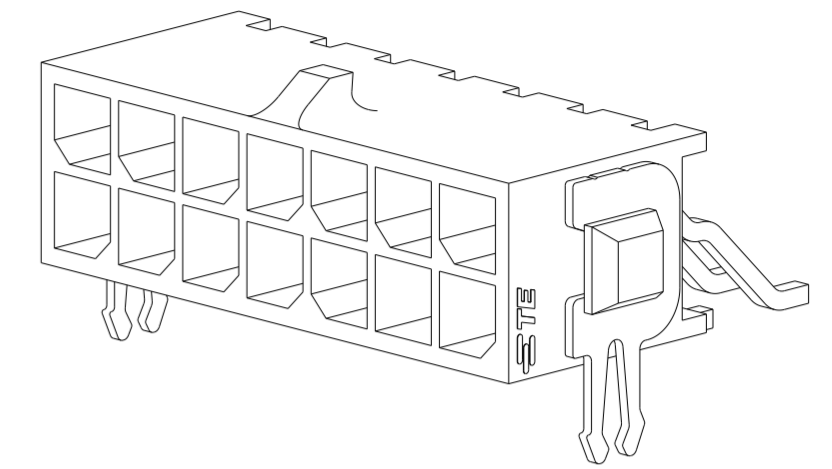
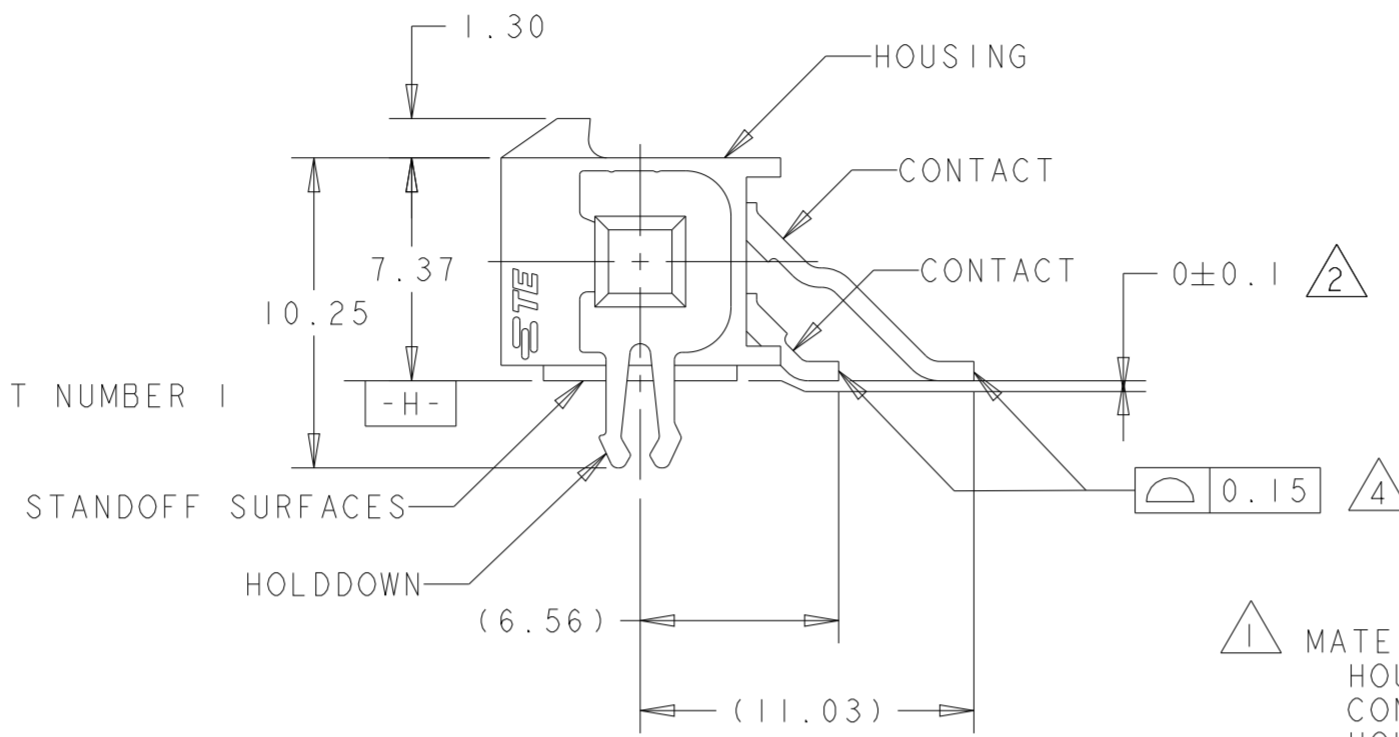


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		G5		REVISED PER ECN-23-240910	24NOV2023	WLS	VS
		G6		REVISED PER ECN-24-279340	19AUG2024	WLS	JP
		H		REVISED PER ECN-25-323497	02JUN2025	WLS	JP

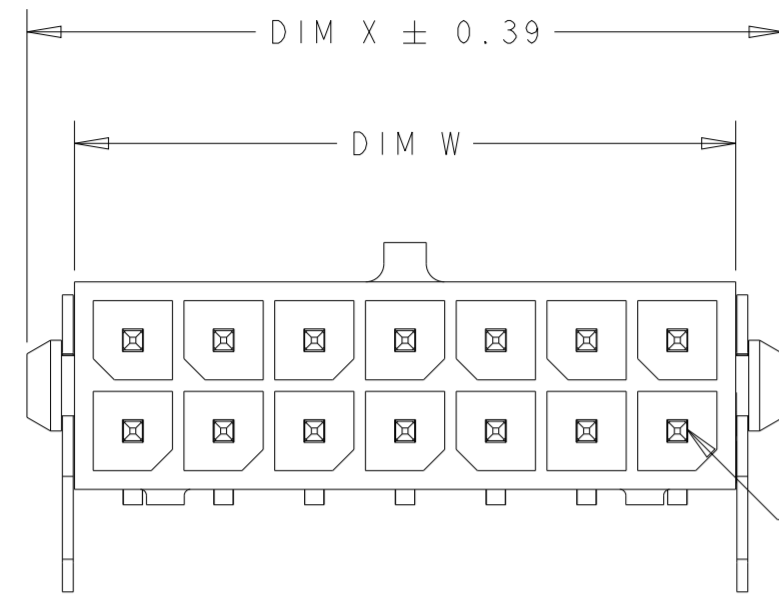


- 1 MATERIAL;
HOUSING - UL 94V-0 RATED HIGH TEMP NYLON, COLOR BLACK.
CONTACTS - BRASS.
HOLDDOWNS - PHOSPHOR BRONZE.
- 2 DIMENSION APPLIES TO SOLDERTAIL SURFACES AND STANDOFF SURFACES.
- 3 RECOMMENDED PC BOARD THICKNESS OF 1.57.
- 4 ALL SOLDERTAILS.
- 5 PLATING;
CONTACTS - 0.76µm MINIMUM GOLD,
OR
0.0762µm MINIMUM GOLD FLASH OVER 0.69µm MINIMUM PALLADIUM NICKEL,
ON MATING AREA PER TE CONNECTIVITY'S DISCRETION,
2.54µm MINIMUM MATTE TIN ON SOLDER TAILS.
ALL OVER 1.27µm MINIMUM NICKEL.
HOLDDOWNS - 2.54µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL.
- 6 COUNTERPART RECOMMENDED IS PN 794617 (DASH ACCORDING TO NUMBER OF POSITION).
- 7 FOR REELING DIRECTION AND PACKAGING TYPE, SEE SPECIFICATION 114-13000.

OBSOLETE	36.86	37.30	33.00	40.00	24	5-794626-4
	33.86	34.30	30.00	37.00	22	5-794626-2
	30.86	31.30	27.00	34.00	20	5-794626-0
	27.86	28.30	24.00	31.00	18	4-794626-8
	24.86	25.30	21.00	28.00	16	4-794626-6
	21.86	22.30	18.00	25.00	14	4-794626-4
	18.86	19.30	15.00	22.00	12	4-794626-2
	15.86	16.30	12.00	19.00	10	4-794626-0
	12.86	13.30	9.00	16.00	8	3-794626-8
	9.86	10.30	6.00	13.00	6	3-794626-6
OBSOLETE	6.86	7.30	3.00	10.00	4	3-794626-4
	3.86	4.30		7.00	2	3-794626-2
	DIM W	DIM Y	DIM Z	DIM X	NO. OF POSN.	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 19MAR2003	TE Connectivity	
DIMENSIONS: mm		CHK C. JONES 19MAR2003		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C. JONES 19MAR2003	NAME SURFACE MOUNT, RIGHT ANGLE, MECHANICAL HOLDDOWN, ASSY, 0.76Au or 0.69PdNi, DUAL ROW, MICRO MATE-N-LOK™	
0 PLC ± 1 PLC ± 2 PLC ±0.20 3 PLC ± 4 PLC ± ANGLES ±1° FINISH		PRODUCT SPEC 108-1836	SIZE A2	CAGE CODE 0779
MATERIAL 1		APPLICATION SPEC 114-13000	DRAWING NO C-794626	RESTRICTED TO
		WEIGHT -	SCALE 4:1	SHEET 1 OF 2
		CUSTOMER DRAWING	REV H	

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

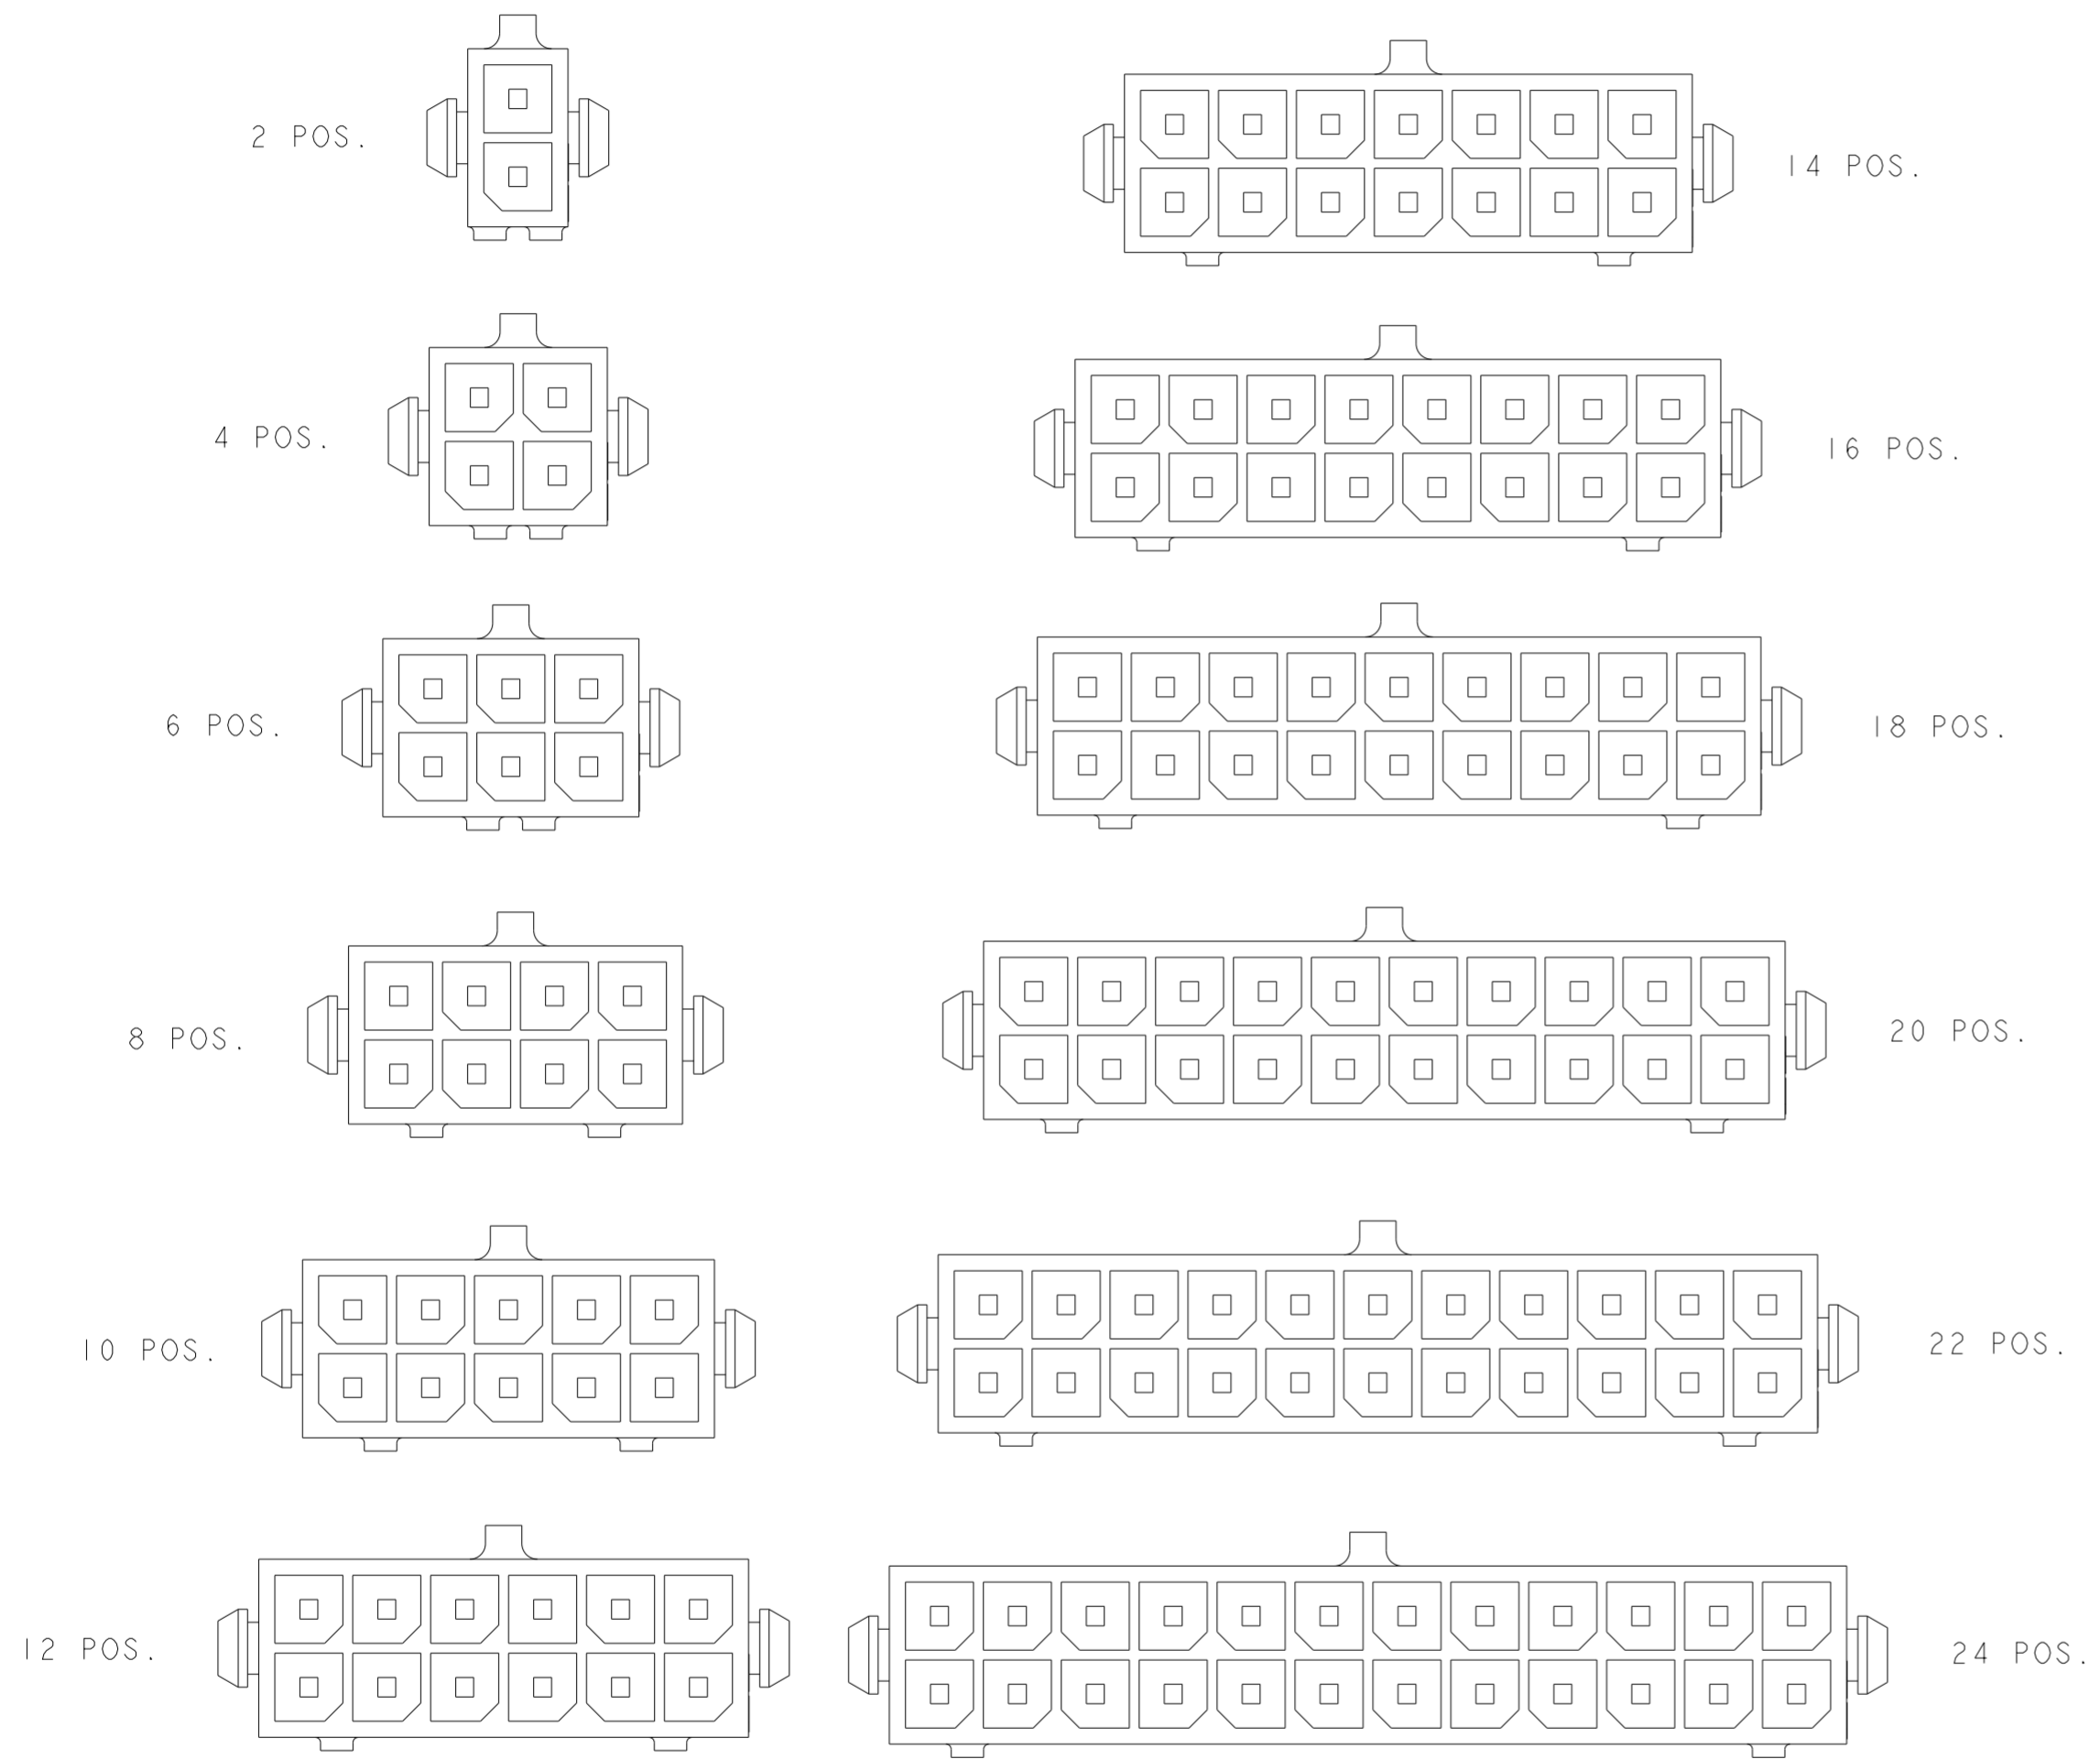

KEYING BY POSITION SIZE

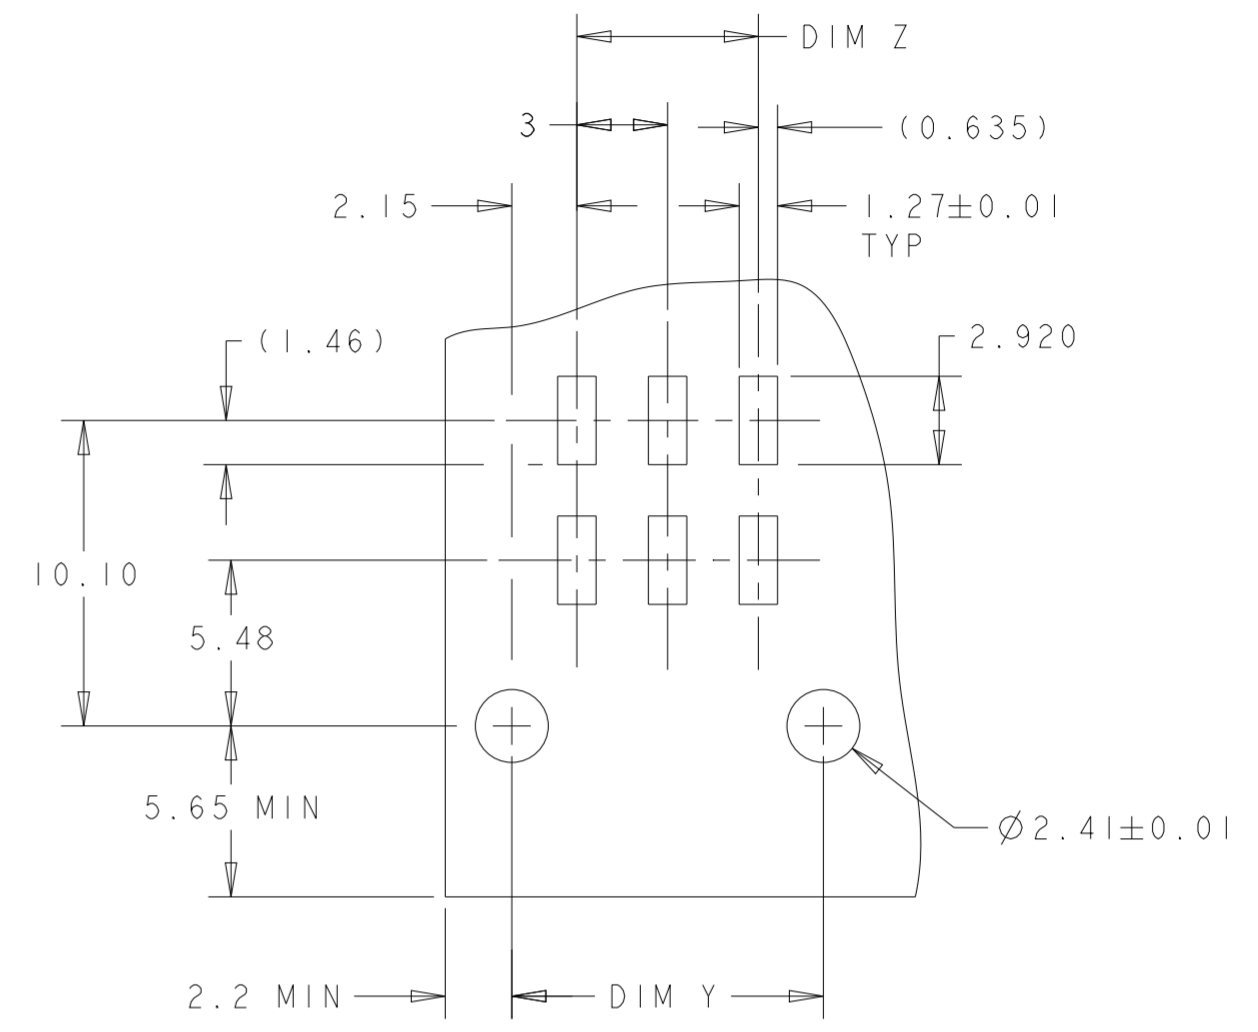

RECOMMENDED PCB LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 19MAR2003	TE Connectivity	
		CHK C. JONES 19MAR2003		
DIMENSIONS: mm		APVD C. JONES 19MAR2003	NAME SURFACE MOUNT, RIGHT ANGLE, MECHANICAL HOLDDOWN, ASSY, 0.76Au or 0.69PdNi, HDR,	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-1836	DUAL ROW, MICRO MATE-N-LOK	
0 PLC ± 1 PLC ± 2 PLC ±0.20 3 PLC ± 4 PLC ±		APPLICATION SPEC 114-13000	SIZE A20779	DRAWING NO C-794626
ANGLES ±1° FINISH		WEIGHT -	RESTRICTED TO -	
MATERIAL		CUSTOMER DRAWING	SCALE 4:1	SHEET 2 OF 2
			REV H	