
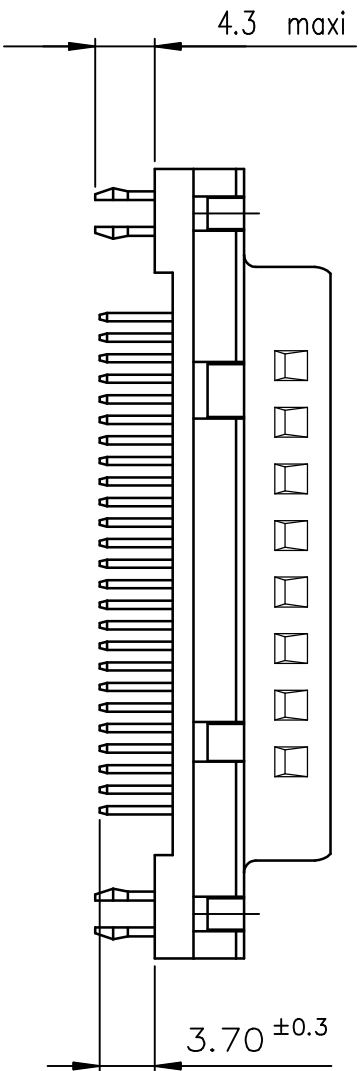
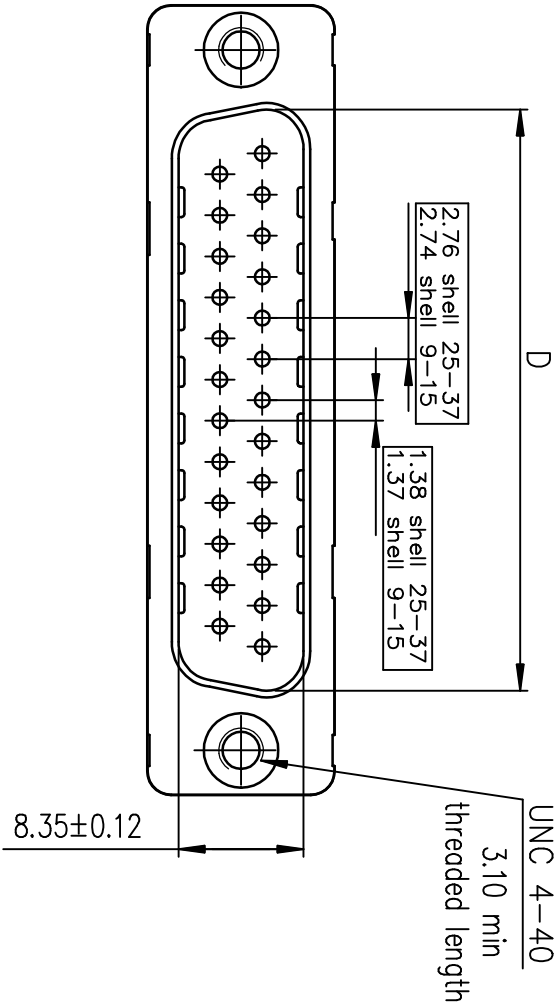
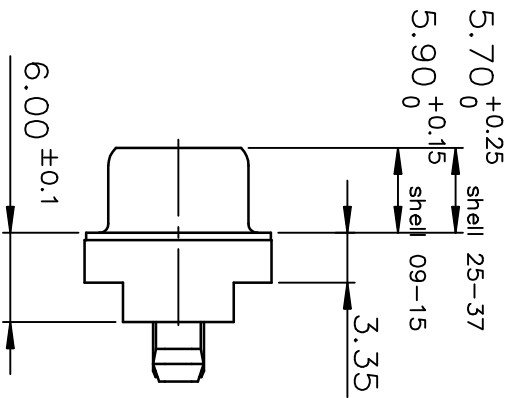


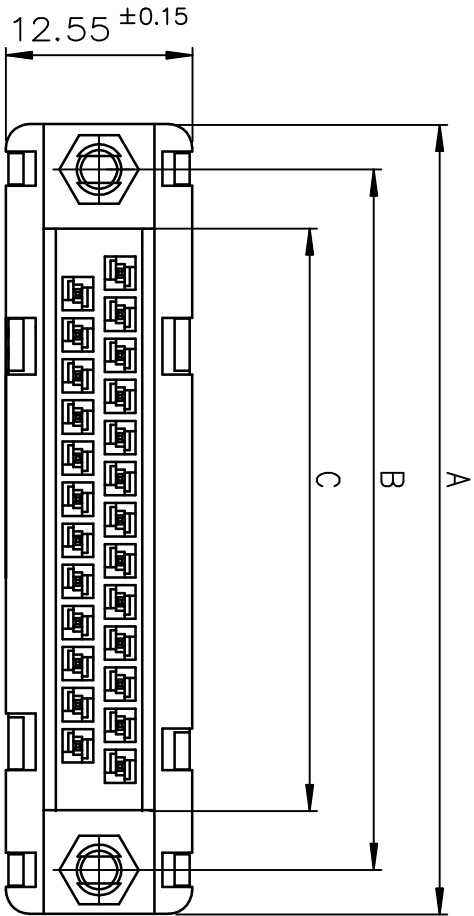


LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24B.GX00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24B.GX00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24B.GX00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24B.GX00LF

Performance class: 4 --> 200 mating/un-mating
6 --> 500 mating/un-mating

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

PC card drilling dimensions(after plating)
(thickness 2.40±0.20mm)

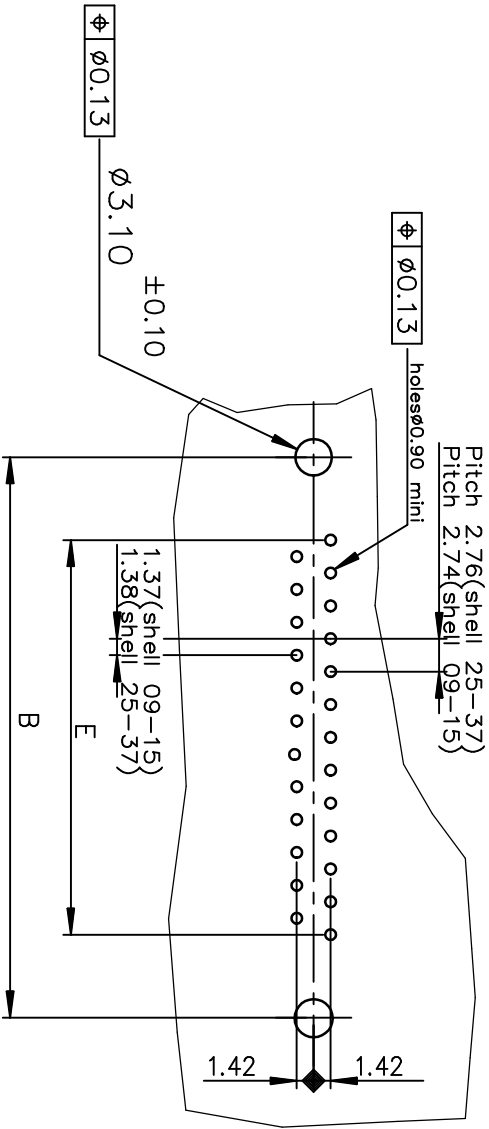

mat'l. code				surface			tolerance			projection		product family	
-				ISO 1302	✓	ISO 406	ISO 1001	tolerances unless otherwise specified			MM	D-SUB	
ltr	ecn no	dr	date	angles			linear	.0±0.1			MM	title	
F	ELX-I-21654	AB	2015-10-26	0°±1°			.00±0.05	.000±0.005			scale 2:1	MALE DELTA-D	
G	ELX-I-42817	ACU	2021-10-18									STRAIGHT, SOLDER TYPE	
				dr			JOUBERT	1996-09-10				dwg no	
							engnRGREGAR MATTHEW	2021-10-18				sheet 1 of 1	
							chr GREGAR MATTHEW	2021-10-18				size	
							appdSANOU KURIKOSU	2021-10-18				A3	
sheet index	revision	sheet	G	1								type	
												Product Customer Drawing	