

()

()

()


()

A

B



C

D

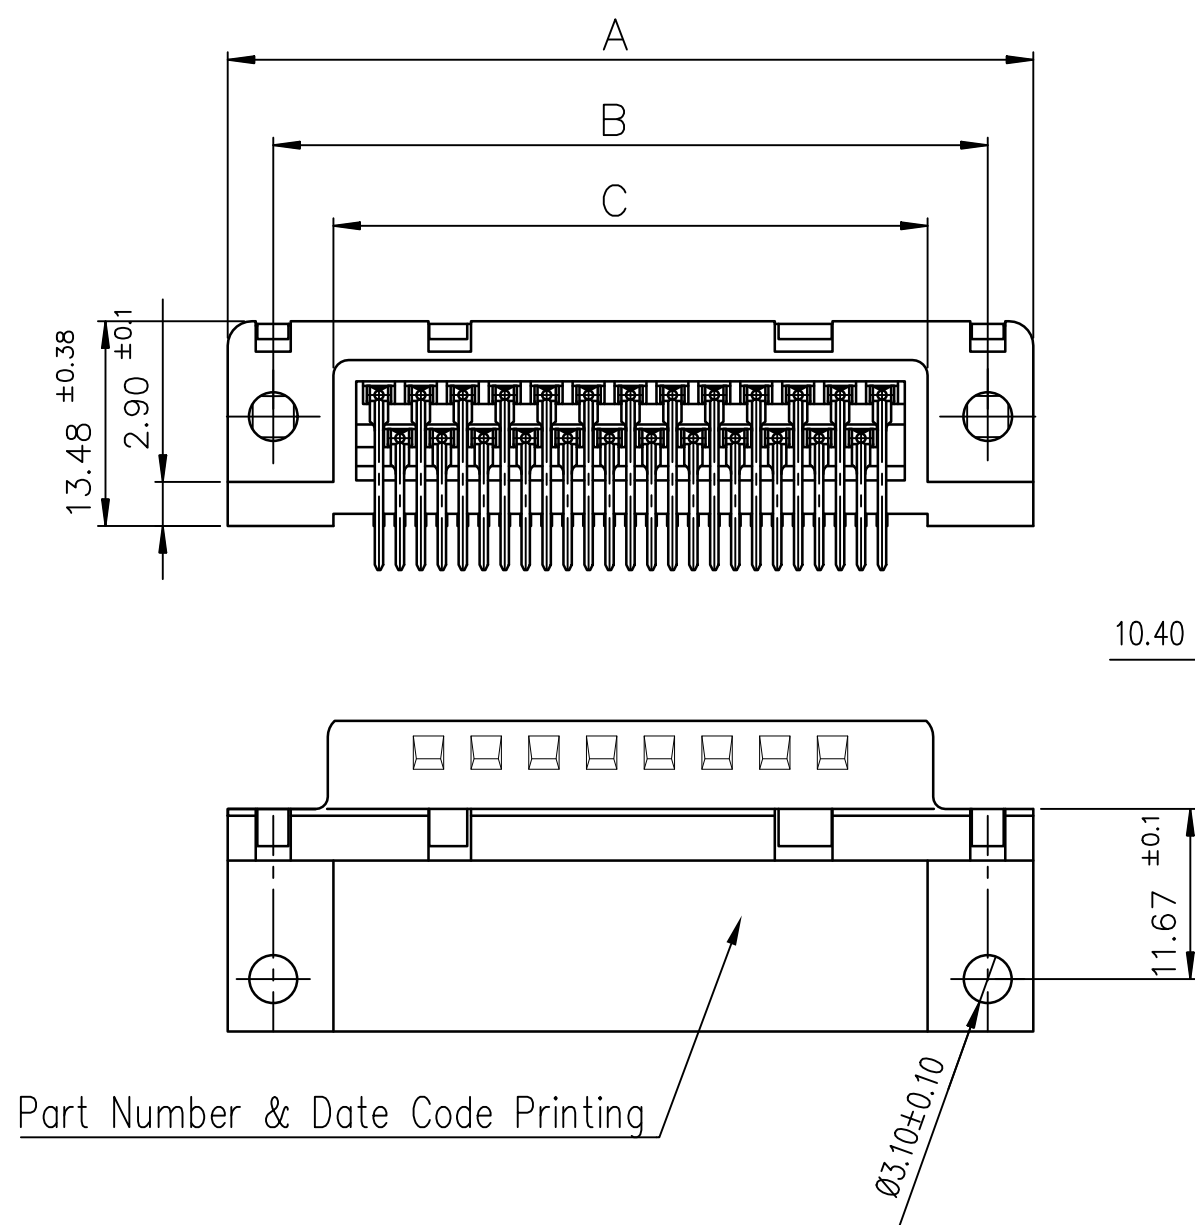


SHELL	A±0.38	B±0.12	C±0.10	D±0.25	G±0.25	PART NUMBER
09	30.81	24.99	16.96	16.79	5.90	D09P13B*PA00LF
15	39.14	33.32	25.18	25.12	5.90	D15P13B*PA00LF
25	53.03	47.04	39.12	38.84	5.70	D25P13B*PA00LF
37	69.32	63.50	55.68	55.30	5.70	D37P13B*PA00LF

PERFORMANCE CLASS: 4 - 200 MATING CYCLES
PERFORMANCE CLASS: 5 - 500 MATING CYCLES

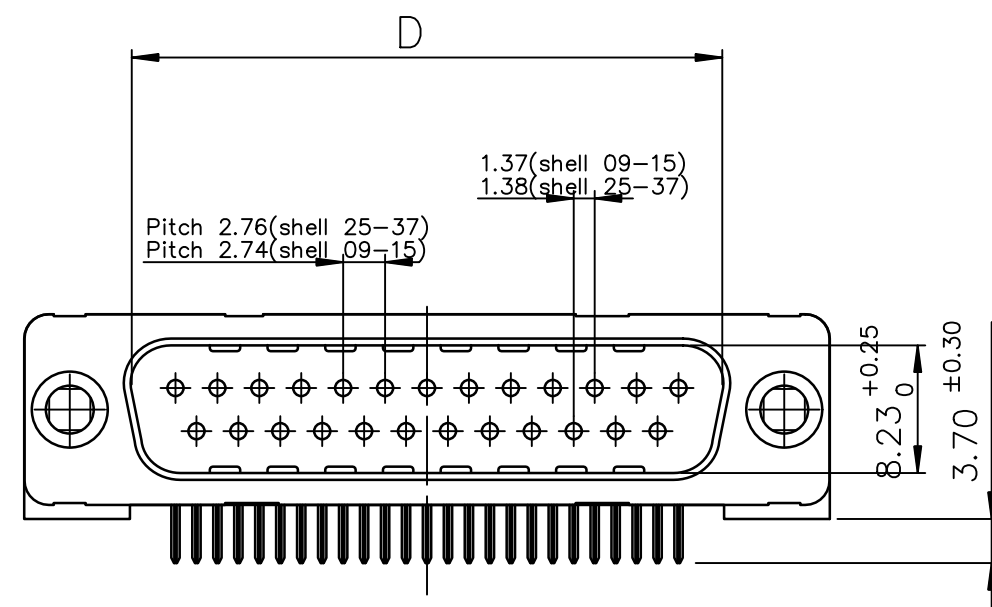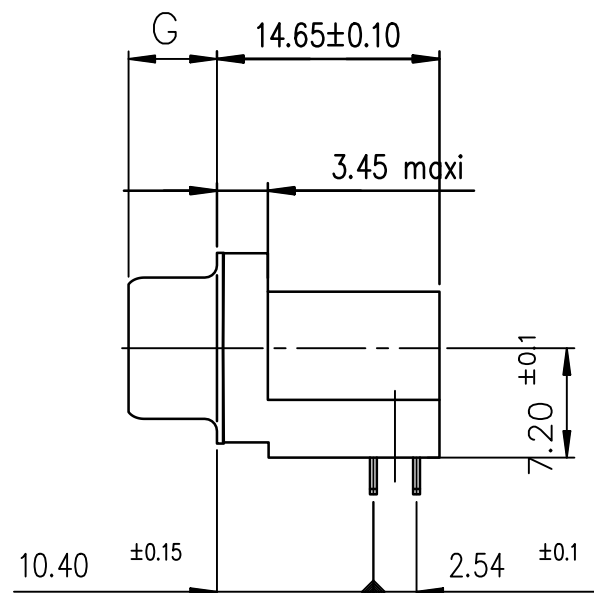

PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

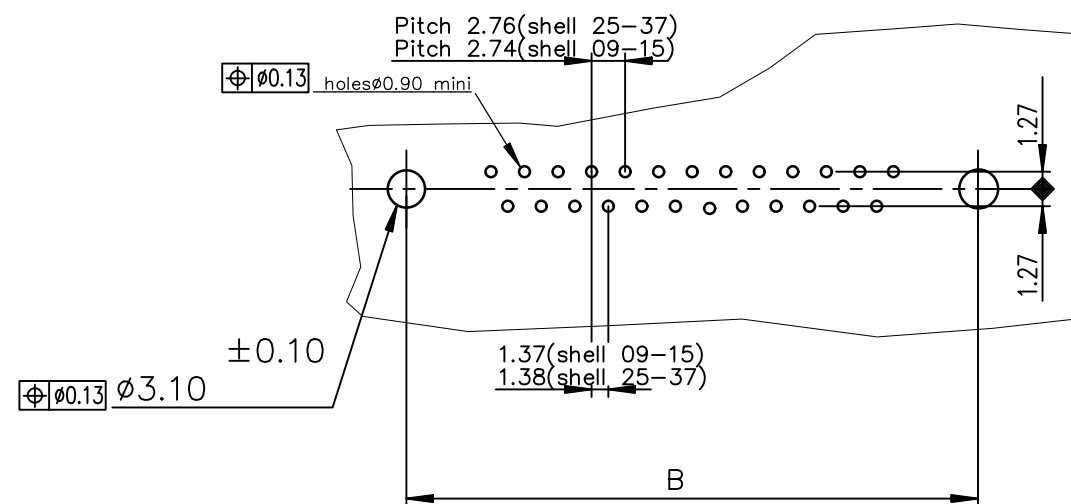

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS: SEE DRAWING C01-8646-0000

mat'l. code SEE NOTES				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection mm	product family D-SUB			
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm	title			
G	ELX-I-39288	GM	2020-11-12	angles	linear		DELTA-D RIGHT ANGLE SOECKET CONNECTOR WITHOUT ACCESSORY			
H	ELX-I-59402	GM	2026-02-12	0°±1°		scale NTS	dwg no sheet 1 of 1 size			
				dr	GREGAR M	2020-11-12	Amphenol FCi			
				engr	GREGAR M	2026-02-12				
				chr	GREGAR M	2026-02-12	C01-8646-0162 A3			
				appd	ALEX BABU	2026-02-12	type Product Customer Drawing			
sheet index	revision sheet	H	1							