

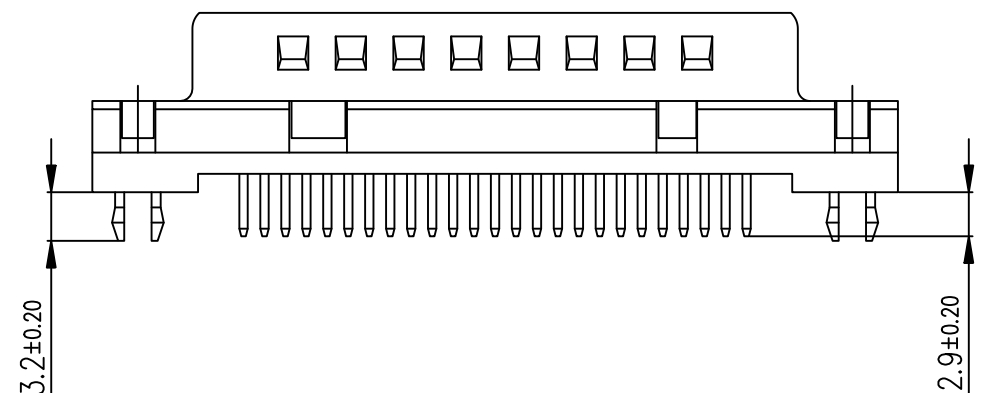
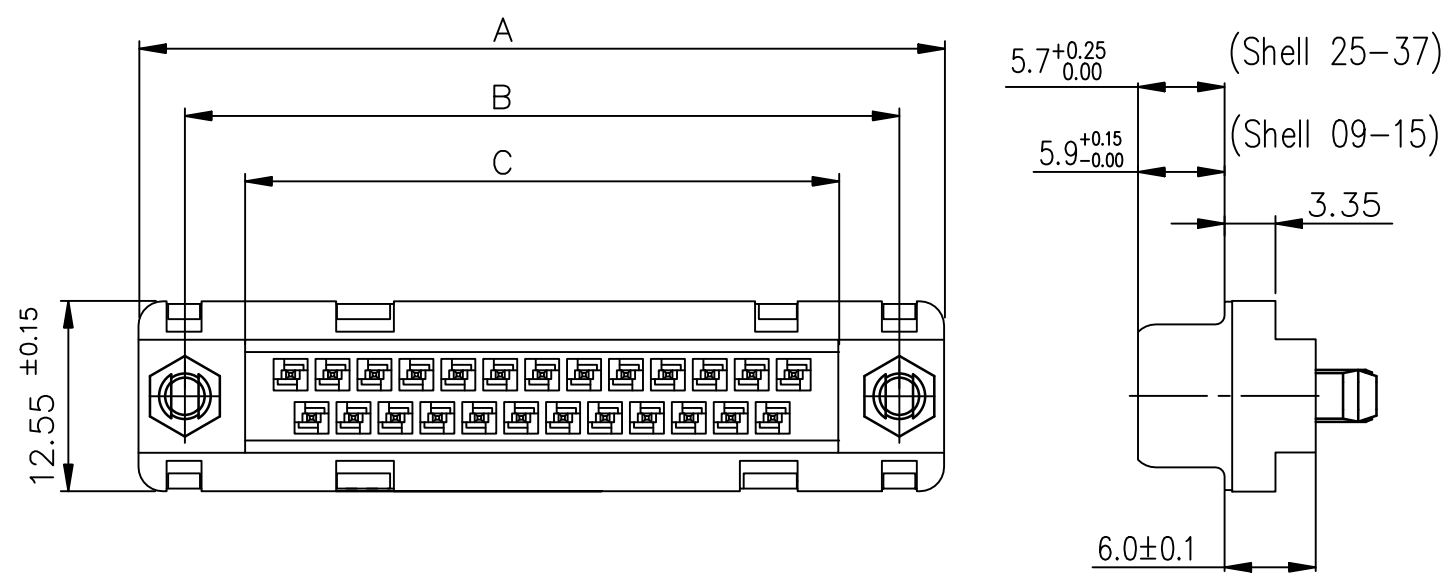


Amphenol FCI
© 2016 APCI

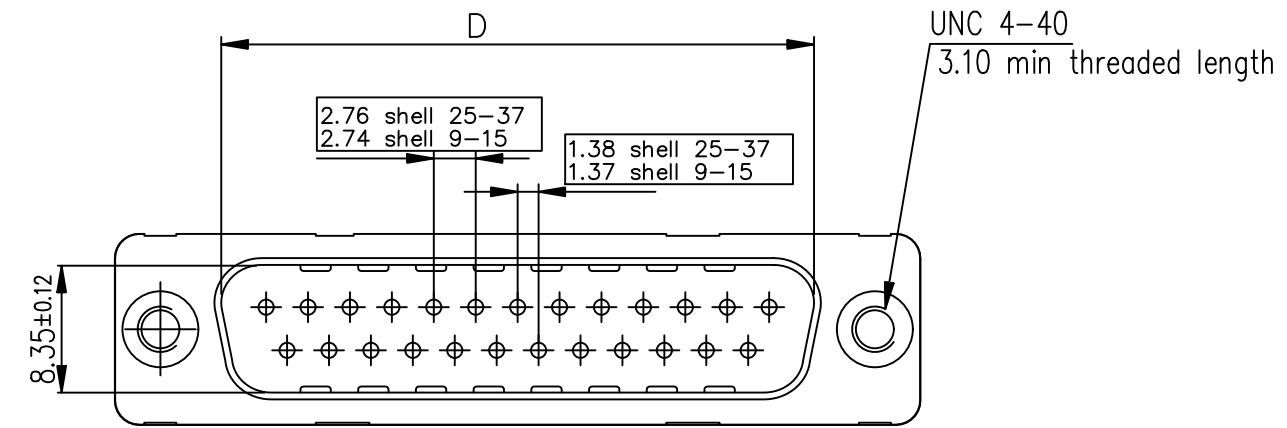

PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

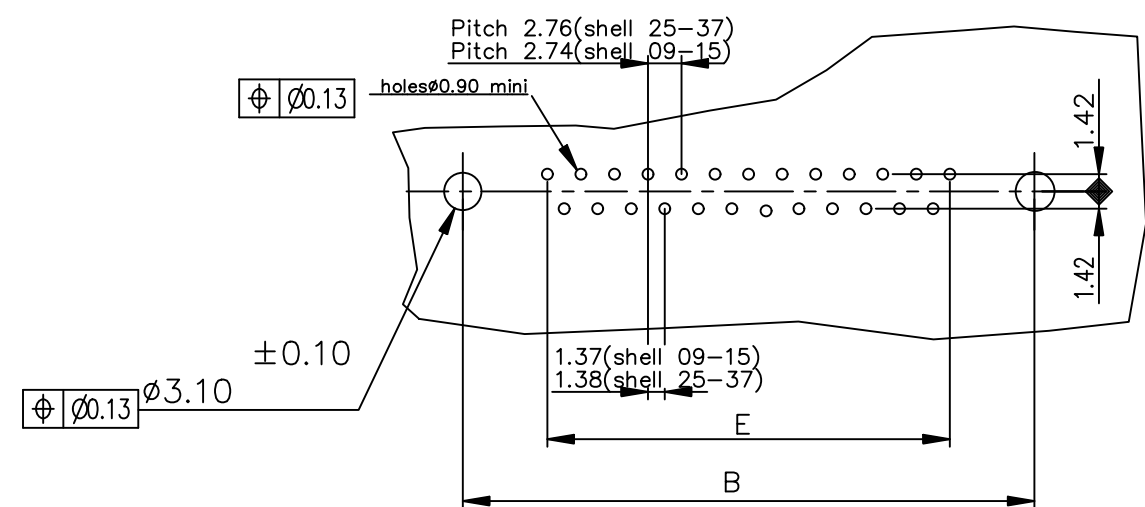


PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A.GX00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24A.GX00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24A.GX00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24A.GX00LF

Performance Class: 4 --> 200 Mating/Unmating
6 --> 500 Mating/Unmating

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

mat'l. code —				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family D—SUB										
ltr	ecn no	dr	date	tolerances unless		otherwise specified				title MALE DELTA-D STRAIGHT , SOLDER TYPE										
K	ELX-I-21654	AB	2015-10-26	angles	linear	.0±.0.1														
L	ELX-I-56739	GM	2025-08-01			.00±0.1														
				0°±2°		.000±0.1		scale NTS												
				dr	LELEON		1992-09-10				dwg no				sheet 1 of 1				size	
				engr	GREGAR M		2025-08-01				C01-8646-0101				A3					
				chr	GREGAR M		2025-08-01													
				appd	ALEX BABU		2025-08-01				type Product Customer Drawing									
sheet index		revision sheet		L																
				1																