


| Part Number       | Contact Area Plating Finish |
|-------------------|-----------------------------|
| K85X-CD-37S-BRJ   | Gold Flash (standard)       |
| K85X-CD-37S-BRJ15 | 15u" Gold (15 option)       |
| K85X-CD-37S-BRJ30 | 30u" Gold (30 option)       |

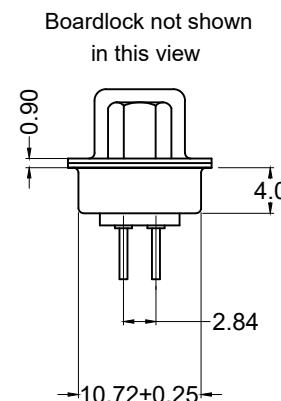

30 Option: 30u" gold on mating end, tin on termination end, nickel underplate on entire contact

Rated Current: 2A

Rated Voltage: 30V RMS

Insulation Resistance:  
more than 1000 megohms at  
500V DC

Contact Resistance:  
13 milliohms max.

Dielectric Withstanding Voltage:  
1000V for 1 minute

Operating Temperature:  
-55°C to +105°C

K85X-CD-37S-BRJ

37 Pin Female, Boardlocks, JSX-1055 Jackscrews



| Tolerances    |  |
|---------------|--|
| X.X ± 0.25    |  |
| X.XX ± 0.15   |  |
| Unless Stated |  |
| Otherwise     |  |

