

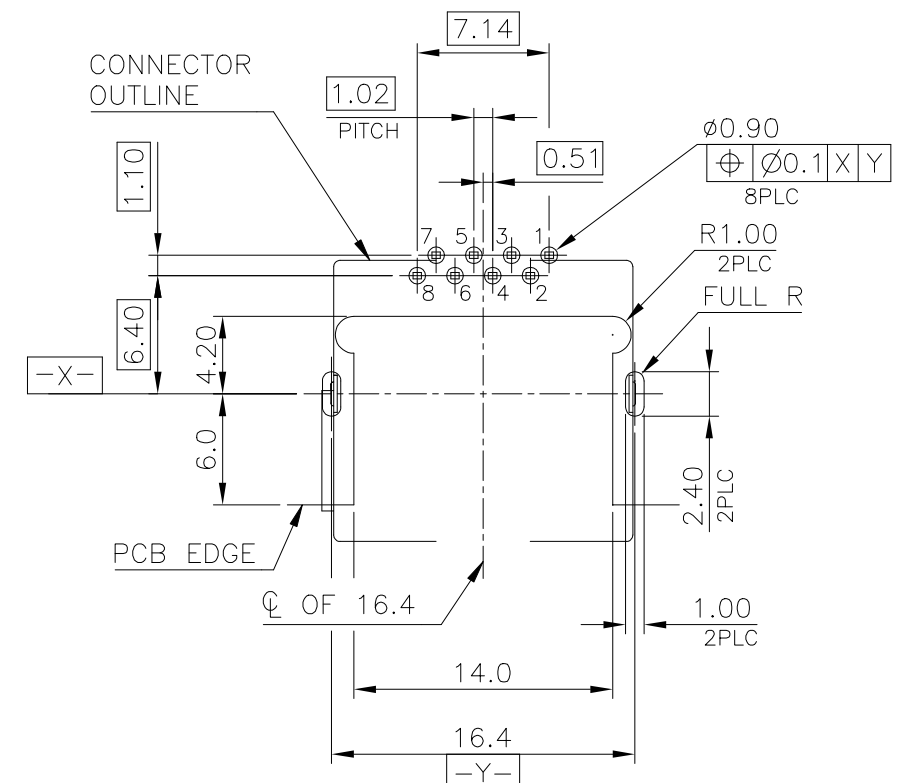
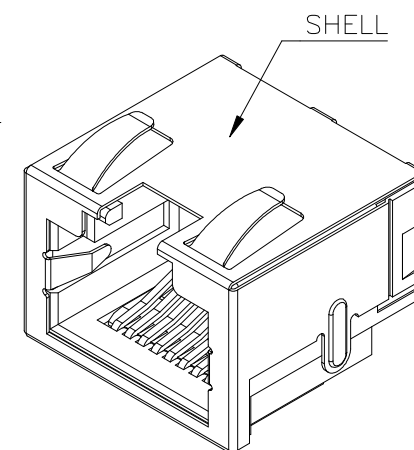


2.2 SHELL: 0.508um [20u"] MIN. NICKEL PLATED OVERALL.

3. REFLOW SOLDER COPABLE TO 260+/-5°C PEAK TEMPERATURE PER TE SPEC TEC-109-201, TEST METHOD A, CONDITION B.

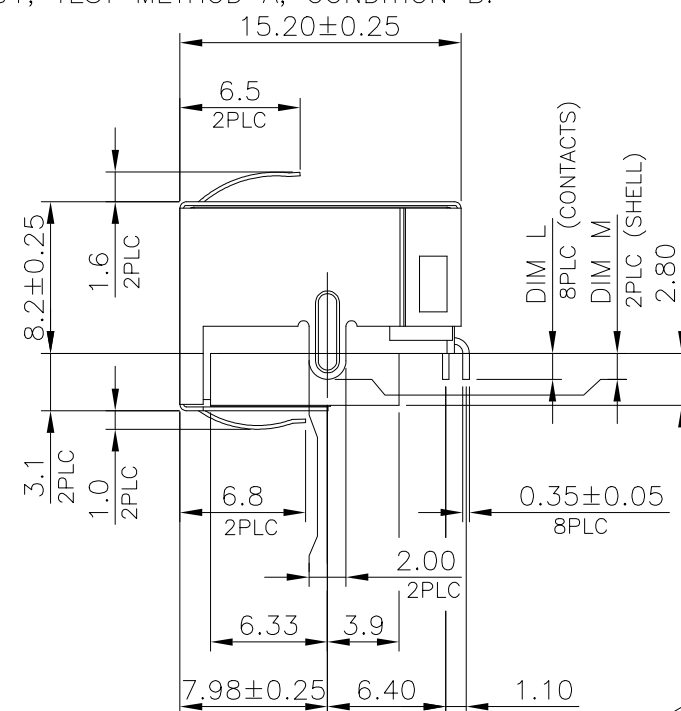


RECOMMENDED PCB LAYOUT (COMPONENT SIDE)
TOLERANCE: ± 0.05
PCB THICKNESS: 1.2mm

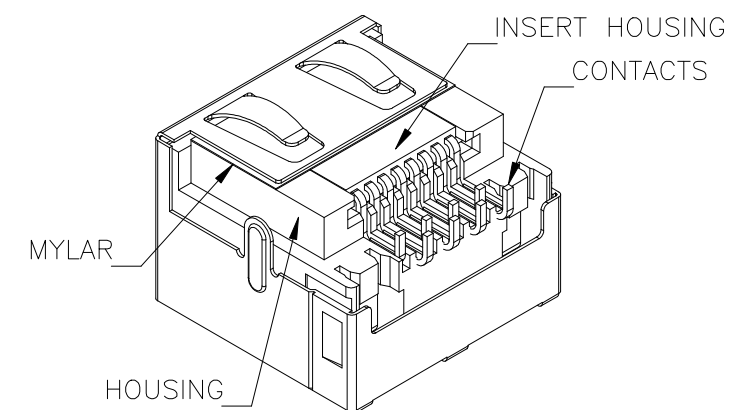

0.762um [30u"]	1.8	1.8	2041307-2
0.152um [6u"]	1.4	1.4	2041307-1
MIN. GOLD THICKNESS	DIM M	DIM L	PART NUMBER

CUSTOMER DRAWING

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED	
mm		0 PLC	± —
		1 PLC	± 0.3
		2 PLC	± 0.2
		3 PLC	± 0.15
		4 PLC	± —
		FINISH	
MATERIAL		FINISH	
SEE NOTE		SEE NOTE	



TE Connectivity

1	NAME	MODULAR JACK CONN RJ45 W/O LED, TAB UP, SIDE ENTRY OFFSET, DIP TYPE, H=8.2MM
---	------	--

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
A3	00779	C=2041307	—	
		SCALE	SHEET	REV
		1:1	1 OF 3	D

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , - .





COPYRIGHT - By -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

- NOTES:
1. MATERIAL:
TRAY: PET
TOP TRAY: PET
BOX: CORRUGATED FIBER.
 2. EACH BAG SHALL BE INCLUDED:
*DESICCANT
 3. DIMENSION: SEE DRAWING
 4. QUANTITY: SEE TABLE
 5. WEIGHT: SEE TABLE

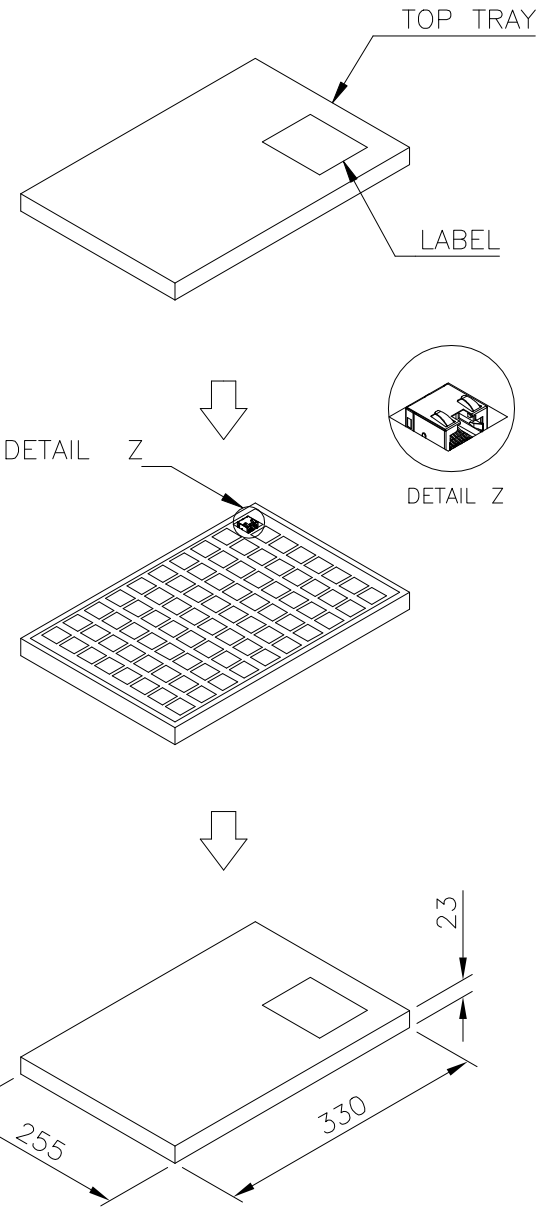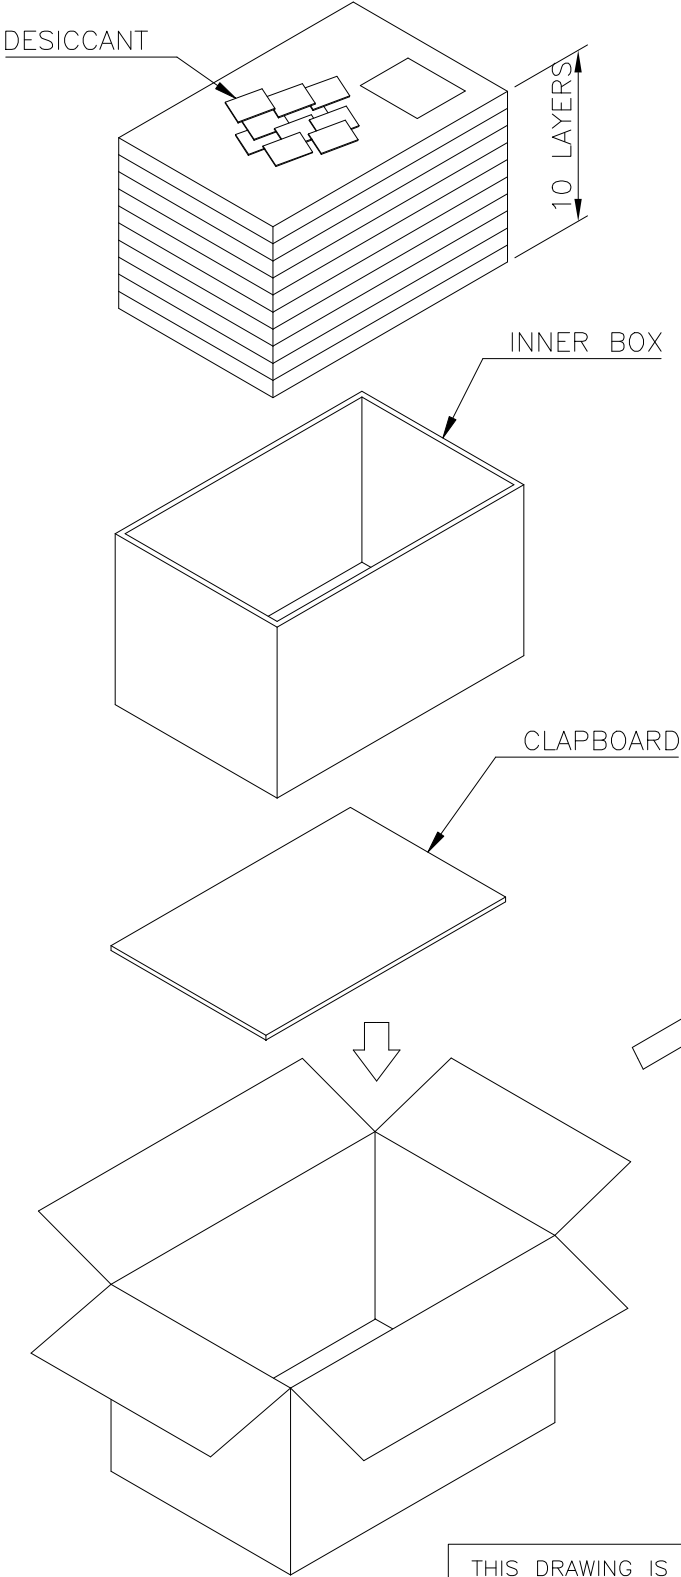

4.97 Kg	2.33 Kg	80	10	800	2041307-1
GROSS WEIGHT	NET WEIGHT	PCS/ TRAY	TRAY/ BOX	PCS/ BOX	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN E. LIU 10JAN2011	TE Connectivity		
		CHK S. CHIEN 10JAN2011			
		APVD W. KODAMA 10JAN2011			
		PRODUCT SPEC 108-57847			
DIMENSIONS: mm		APPLICATION SPEC -	NAME MODULAR JACK CONN RJ45 W/O LED, TAB UP, SIDE ENTRY OFFSET, DIP TYPE, H=8.2MM		
		0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.15 4 PLC ± - ANGLES ± -	SIZE A3		
MATERIAL SEE NOTE		FINISH SEE NOTE	CAGE CODE 00779		
			DRAWING NO C=2041307		
			RESTRICTED TO -		
			SCALE 1:1		
			SHEET 2 OF 3		
			REV D		
			CUSTOMER DRAWING		

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , -

ALL RIGHTS RESERVED.



COPYRIGHT - By -


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

NOTE:

1. EACH BAG SHALL BE INCLUDED:
*DESICCANT
2. PEELING STRENGTH: 0.1~1.3N(1~130 GRAMS)
FOR 12~56mm WIDE CARRIER TAPES
3. PEELING SPEED: 300mm/MINUTES.
4. PACKAGING MATERIAL:
4.1 COVER TAPE-COMPOSITE OF POLYETHYLENE
TEREPHTHALATE (PET)
4.2 CARRIER-POLYSTYRENE (PS)
4.3 CARRIER REEL-POLYSTYRENE

DESICCATING AGENTS

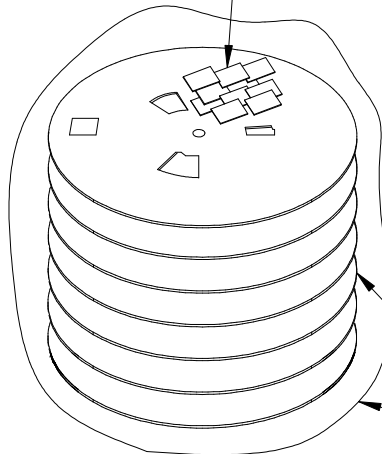

TAPE & REEL

BAG

BOX

VOID FILLER

LABEL

(45)

LABEL

165°~180°

ø330



ABOUT 280(Ref.)mm

UNLOADED SECTION

PRODUCT LOADING SECTION


ABOUT 280(Ref.)mm

UNLOADED SECTION

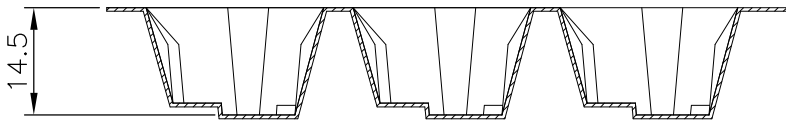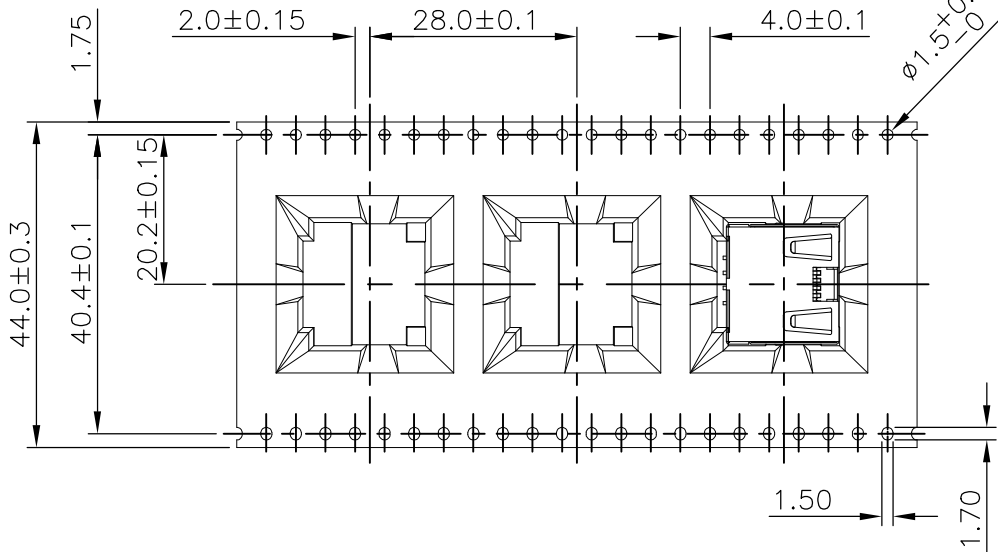

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



MATERIAL

SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.3
2 PLC ± 0.2
3 PLC ± 0.15
4 PLC ± -
ANGLES ± -

FINISH

SEE NOTE

DWN E. LIU 10JAN2011

CHK S. CHIEN 10JAN2011

APVD W. KODAMA 10JAN2011

PRODUCT SPEC

108-57847

APPLICATION SPEC

WEIGHT

-

CUSTOMER DRAWING

5.8 Kg	2.62Kg	150	6	900	2041307-2
GROSS WEIGHT	NET WEIGHT	PCS/ REEL	REEL/ BOX	PCS/ BOX	PART NUMBER



TE Connectivity

NAME

MODULAR JACK CONN
RJ45 W/O LED, TAB UP, SIDE ENTRY
OFFSET, DIP TYPE, H=8.2MM

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-2041307

-

SCALE

1:1

SHEET

3 of 3

REV

D