

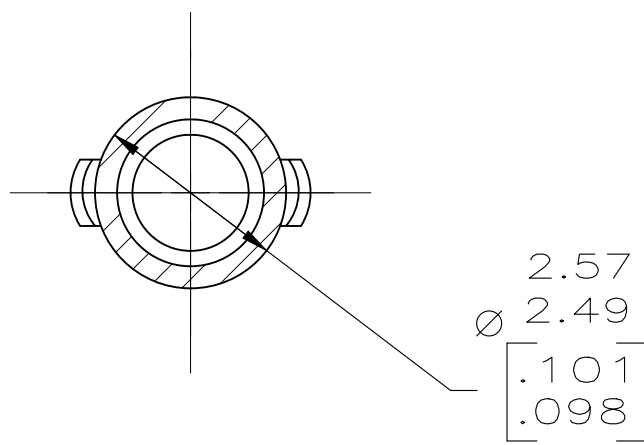
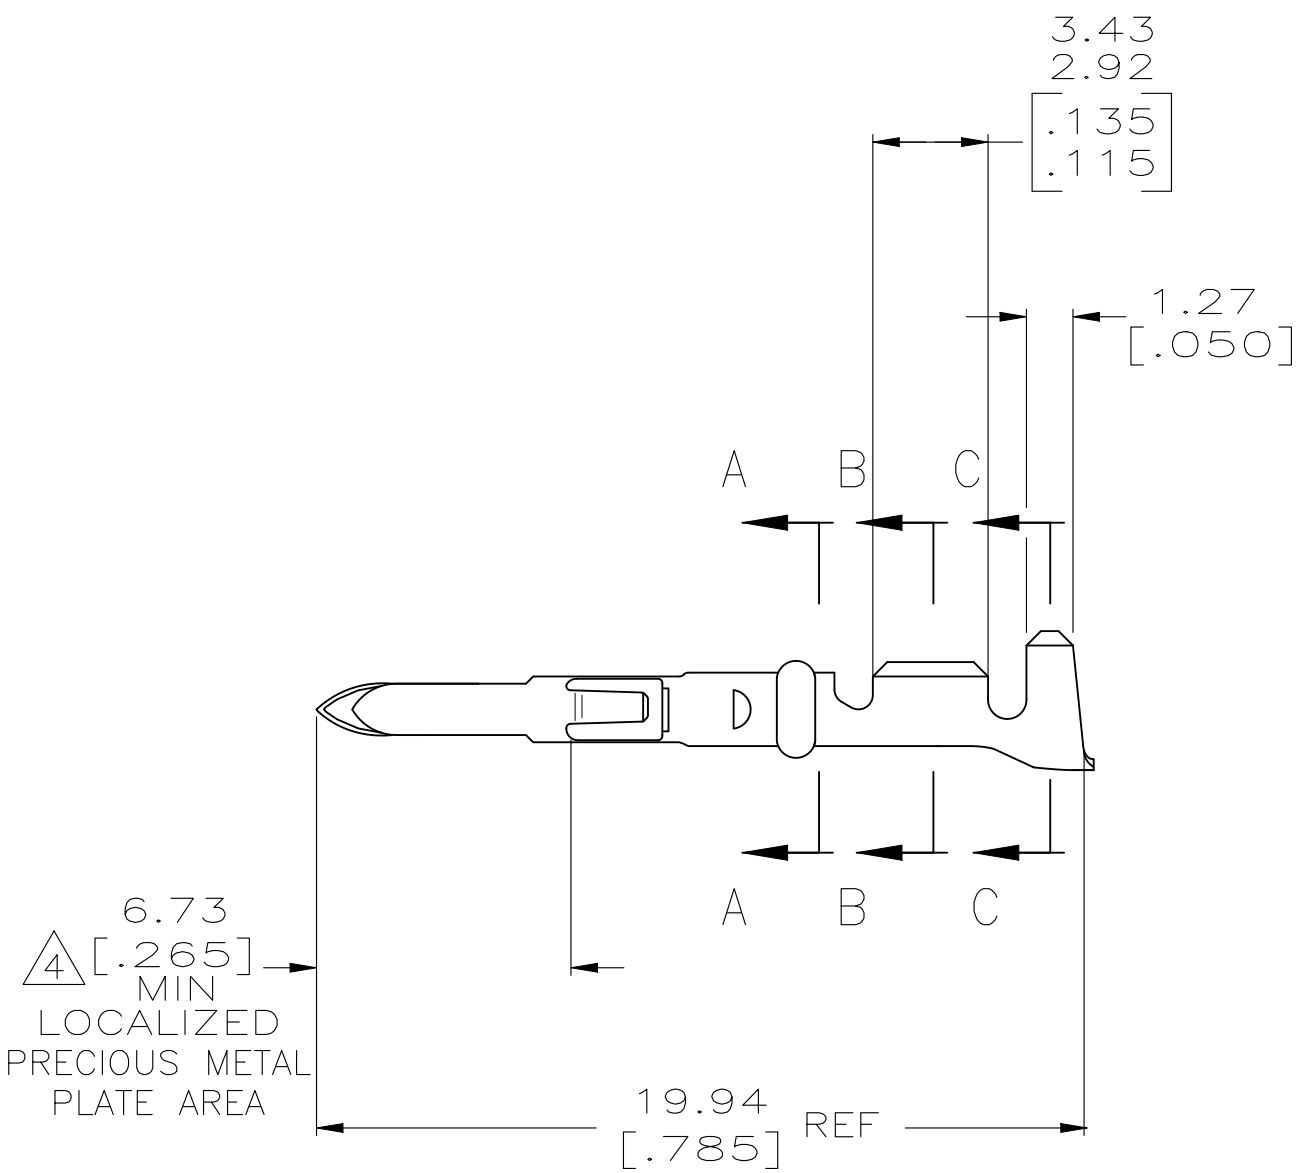
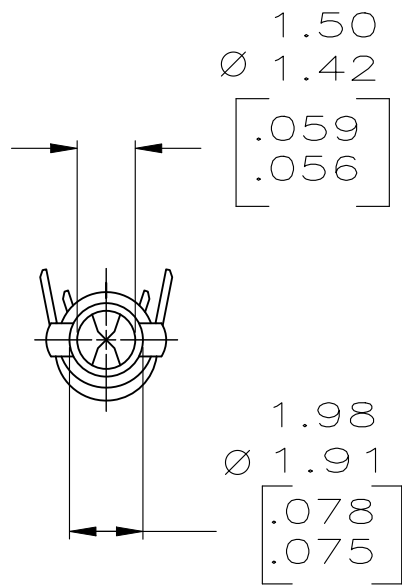


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
D1	REVISED	PER ECR-25-265801	22DEC2025	LP	JFS


- 1 WIRE RANGE: 0.12–0.9mm² (26–18 AWG).
- 2 INSULATION RANGE: 1.27–2.92 [.050–.115] MAX. DIA.
- 3 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4 TIP PLATE WITH 0.00076–0.00091 [.000030–.000036] MIN PRECIOUS METAL PLATING ON THE LOCALIZED PRECIOUS METAL PLATE AREA OVER 0.00127 [.000050] MIN NICKEL UNDER PLATE.

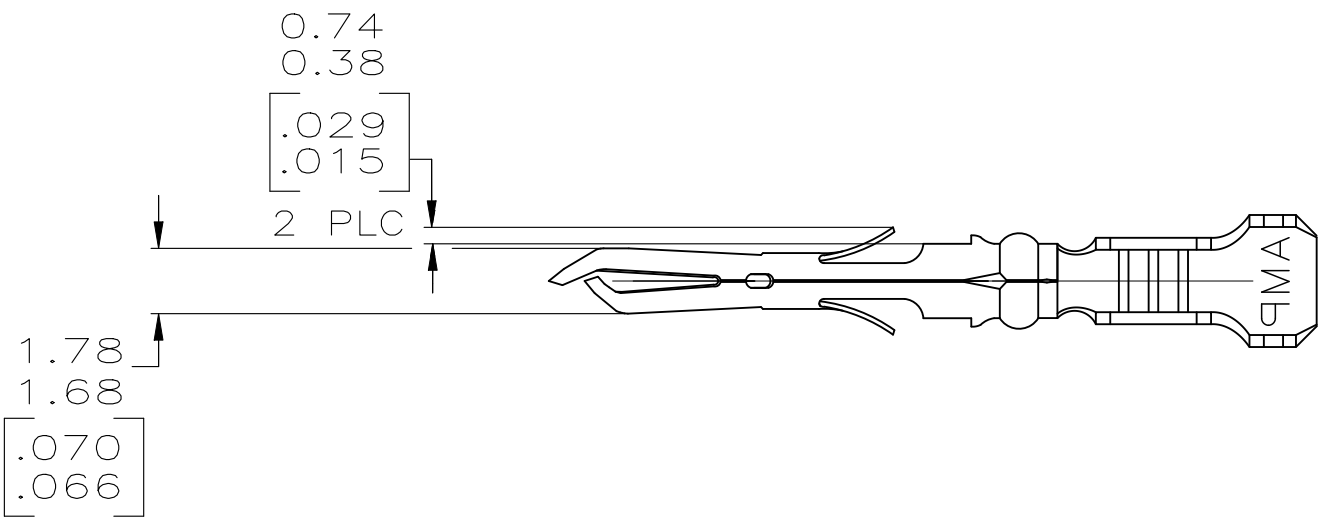

SECTION A–A
SCALE 10:1

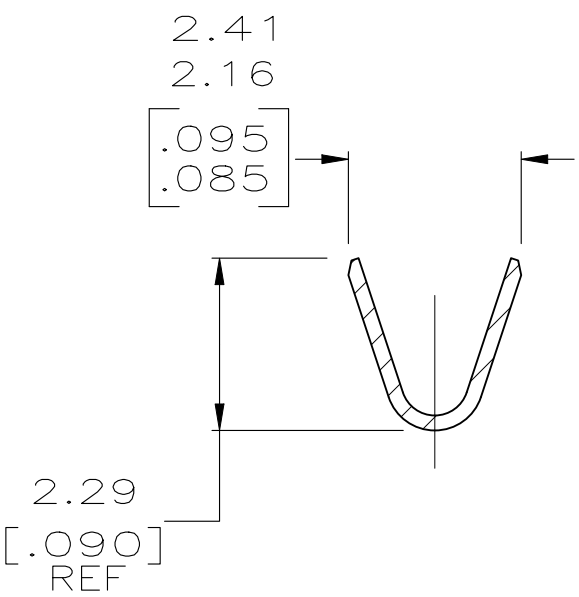

SECTION B–B
SCALE 10:1

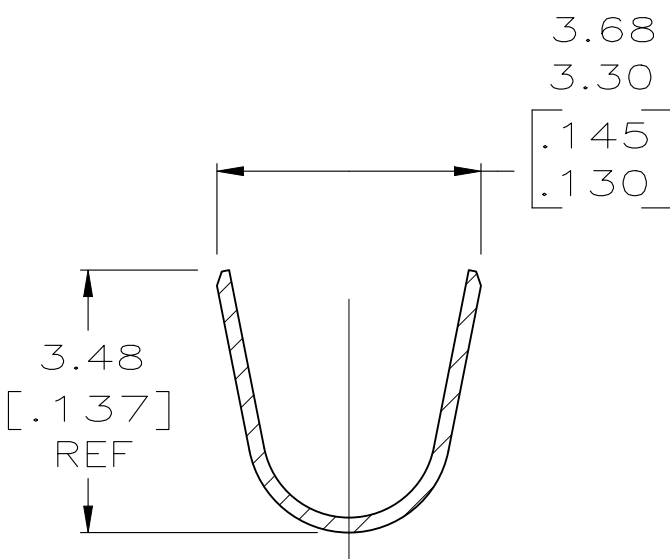

SECTION C–C
SCALE 10:1

4 PRECIOUS METAL PLATE	0.20 [.008] PHOS BRZ	640545–2
PRE–TIN	0.20 [.008] PHOS BRZ	640545–1
FINISH	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. SALMON 3–21–95	TE Connectivity	
		CHK R. SWING 3–21–95		
DIMENSIONS: mm (INCHES)	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD W. LONG 3–21–95	NAME	PIN, LOOSE PIECE, MR
	0 PLC ± –	PRODUCT SPEC	SIZE	CAGE CODE
	1 PLC ± –	APPLICATION SPEC	DRAWING NO	RESTRICTED TO
MATERIAL SEE TABLE	2 PLC ± –	WEIGHT	A100779	640545
	3 PLC ± 0.13 [.005]	CUSTOMER DRAWING	SCALE	5:1
	4 PLC ± – ± –		SHEET	1 OF 1
	ANGLES		REV	D1

