

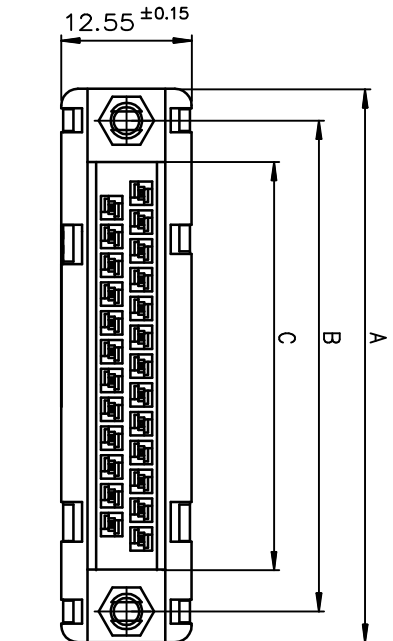
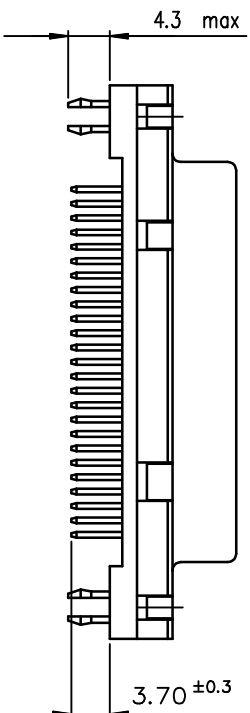


LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S24B.GX00LF
15	39.14	33.32	25.18	24.54	19.18	D15S24B.GX00LF
25	53.03	47.04	39.12	38.25	33.12	D25S24B.GX00LF
37	69.32	63.50	55.68	54.71	49.68	D37S24B.GX00LF

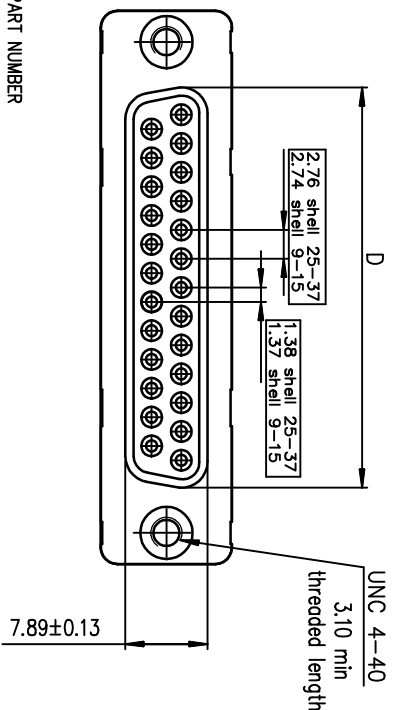

PC cord drilling dimensions(after plating)
(thickness 2.40±0.20mm)

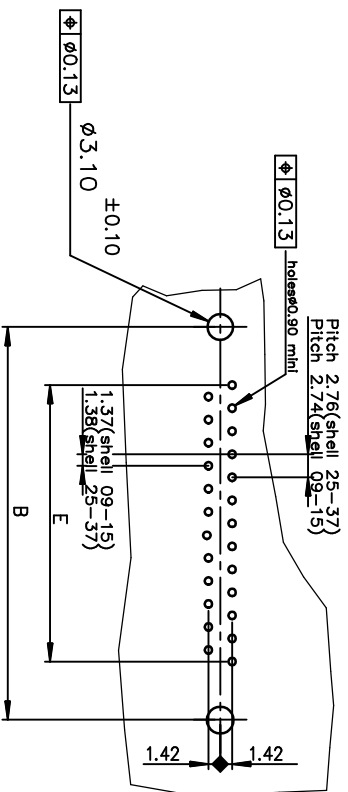

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

mat'l. code		surface		tolerance		projection		product family	
litr	ecm no	dr	date	ISO 1302	ISO 406	ISO 1001		D-SUB	
G	EX-21654	AB	2015-10-26	tolerances unless otherwise specified					
H	EX-42807	ACJ	2021-10-18	angles	linear	.00±0.1			
				0±1°	.000±0.005	scale 2:1			
		dr	LELEON	1992-09-16					
		engr	GREGAR MATHEW	2021-10-18					
		chr	GREGAR MATHEW	2021-10-18					
		dppd	SAMOU KURAKOSE	2021-10-18					
sheet	revision	H							
index	sheet	1							

FEMALE DELTA-D
STRAIGHT, SOLDER TYPE

C01-8646-0126

Product Customer Drawing