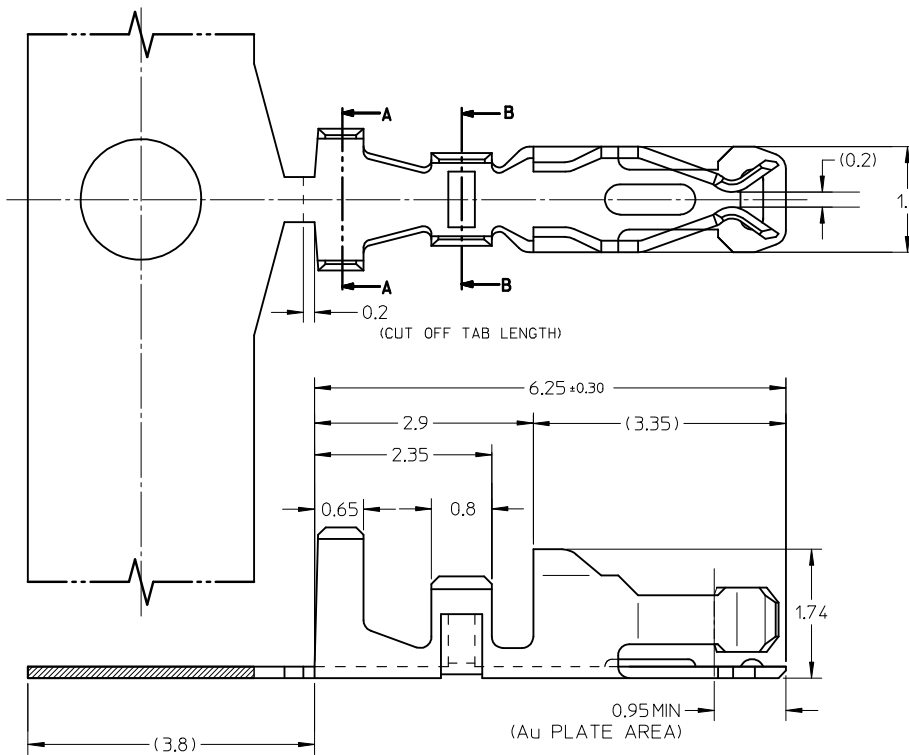


NOTES:

1. APPLICABLE HOUSING : 51110-***1
: 51110-**5*
2. APPLICABLE WIRE RANGE : AWG22 - AWG28
MAXIMUM WIRE INSULATION O.D: 1.40MM
3. MATERIAL: PHOSPOR BRONZE
THICKNESS = 0.152
4. CRIMPING SPECIFICATION: CS-87396-001

Au PLATE THICK. (µm MIN.)	CHAIN FORM
0.38	87396-8051
0.75	87396-9051

EDIT NOTE 2 EC NO: S2016-0100 2015/07/13 DRAWN:GMENARLY 2016/02/17 CHKD:SCHEONG 2016/02/21 APPR:KHLIM C1		DESCRIPTION	REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
							MM ONLY		NTS	METRIC			
					F_A =0		DRAWN BY	DATE	TITLE	MILLI-GRID, 2.0MM GRID W-T-B CONNECTOR CRIMP TERMINAL			
					4 PLACES	± ---	± ---	GMENARLY					2006/12/27
					3 PLACES	± ---	± ---	CHECKED BY					DATE
					2 PLACES	± 0.2	± ---	MLONG					2007/01/16
					F_C =0		APPROVED BY	DATE	MOLEX	MOLEX INCORPORATED			
					1 PLACE	± ---	± ---	MLONG					2010/10/04
					F_P =0		ANGULAR ± 3 °		MATERIAL NO.	DOCUMENT NO.			SHEET NO.
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			SD-87396-001