


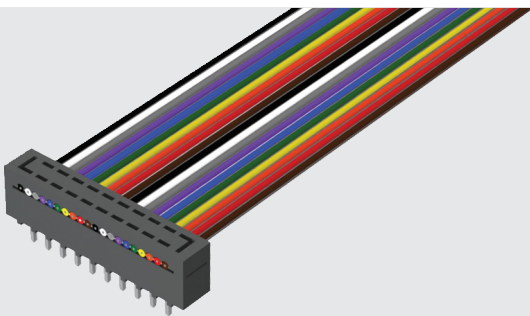

HCMD-10-S-03.00-01

(2.54 mm) .100"

IDC SOCKET & TERMINAL CABLE

Mates with:
TSW, MTSW, TST, HTST,
EW, ZST, MTLW, TSM,
EJH-02 (HCSD only)

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?HCSD or www.samtec.com?HCSS

HCSD, HCSS
Insulator Material:
Black Liquid Crystal Polymer
Temperature Range:
-20 °C to +80 °C
(Rainbow Cable)
-40 °C to +105 °C (Gray Cable)
Voltage Rating:
425 VAC/600 VDC
Contact:
Phosphor Bronze
Plating:
10 μ" (0.25 μm) Au on contact area, 150 μ" (3.81 μm) Sn on balance over 50 μ" (1.27 μm) Ni.
Lead Size Range:
.024" (0.61 mm) SQ to .026" (0.66 mm) SQ
Lead Insertion Depth:
.185" (4.70 mm) to .250" (6.35 mm)
Wire:
28 AWG 7/36 stranded Tinned Copper
RoHS Compliant:
Yes

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?HCMD or www.samtec.com?HCMS

HCMD, HCMS
Insulator Material:
Black Liquid Crystal Polymer
Temperature Range:
-20 °C to +80 °C
(Rainbow Cable)
-40 °C to +105 °C (Gray Cable)
Voltage Rating:
425 VAC/600 VDC
Terminal:
Phosphor Bronze
Plating:
Sn over 50 μ" (1.27 μm) Ni
Wire:
28 AWG 7/36 stranded Tinned Copper
RoHS Compliant:
Yes

Note:
IDC assemblies are non-standard, non-returnable.

TYPE STRIP

ROW OPTION

NO. PINS PER ROW

END ASSEMBLY

ASSEMBLED LENGTH

S
= Single

D
= Double

-05, -08,
-10, -12,
-13, -15,
-17, -20

- "XX.XX"
= Assembled Length

Assembled Length in
INCHES (±1/8")
2 inches minimum

HCM
= Male Strip

LEAD STYLE	A
-01	(3.05) .120
-02	(5.84) .230

HCS
= Socket Strip

-S = Single End

Socket or Male Plug on one end

-D = Double End

Socket or Male Plug on each end

-T = Transfer End

Male Plug on one end with socket on other.
Begin part number with HCM.

WWW.SAMTEC.COM

Unless otherwise approved in writing by Samtec, all parts and components are designed and built according to Samtec's specifications which are subject to change without notice.

HCSS-15-S-03.00-01-G

HCSD-10-S-03.00-01-T-G

HCMD, HCMS, HCSD, HCSS SERIES

LEAD STYLE

-01
= HCSS/HCSD or
(3.05 mm) .120" tail for
HCMS/HCMD

-02
= (5.84 mm) .230" tail
HCMS/HCMD only


PLATING OPTION

-S
= 10 μ " (0.25 μ m) Gold on contact area or tail,
Tin on balance
(Standard on HCSS & HCSD. Leave blank)

-T
= Tin
(Standard on HCMS & HCMD. Leave blank)

NOTCH POLARIZATION

-N = Notch Polarization




Required for HCSS and HCSD.
(Not available on HCMS or HCMD,
unless Transfer, then only the
socket is polarized.)

OTHER OPTIONS

-P "XX"

= Position Polarization



Specify "XX" as position. For
Double the same position will
be polarized on both ends. (Not
available on HCM, unless Transfer,
then only the socket is polarized)

-G

= Gray Cable

Standard cable is color coded. Specify
-G for Gray cable with one red edge.

-ST "X"

= Stripped & Tinned

Specify Suffix from table.
All dimensions are $\pm 1/16$ " (1.59 mm).




-ST8	1/8" (3.18)
-ST4	1/4" (6.35)
-ST2	1/2" (12.70)
-ST3	3/8" (9.53)

-B "XX"

= Breakout

Specify "XX" as number of
conductors to be broken out.



Breakout starts with
Number 1 lead indicated
by brown wire or red stripe.
Shown on top side.


-RW

= Reversed Wiring

#1 wire opposite position #1

-S "XX"


= Daisy Chain Single



When mating double row connector
with two single row connectors, the
outer most single will be connected
to Conductor #1 and the inside
single to Conductor #2.

-D "XX"

= Daisy Chain, Double




-W "XX"

= Wiring Reversed
Daisy Chain, Single

Same as -S "XX" except outer strip
connected to conductor #2 and inner
strip connected to conductor #1.


-R

= Reversed



-M


= Middle Reversed



Requires -SXX, -WXX or -DXX

-O

= Outside Reversed



Requires -SXX, -WXX or -DXX