

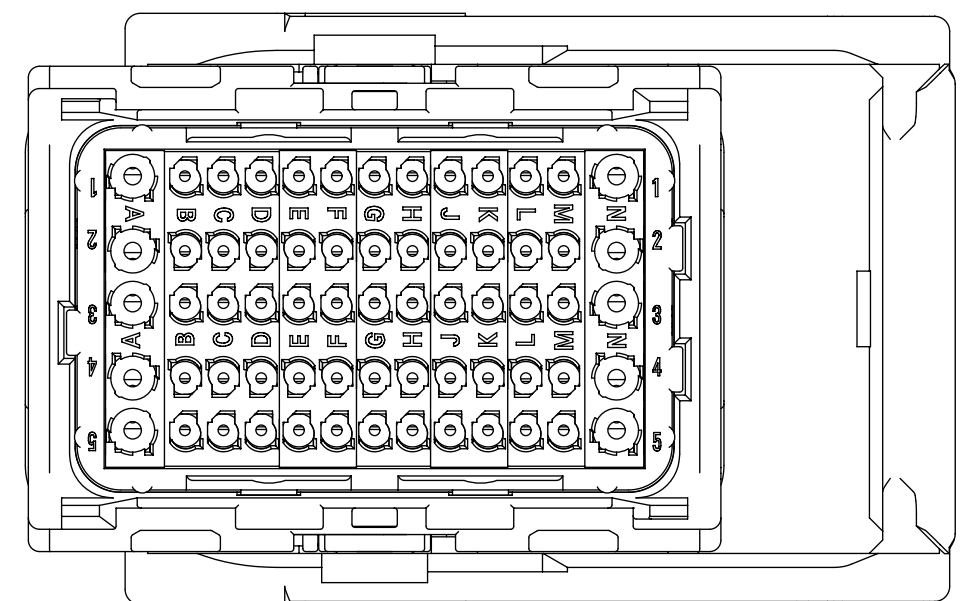
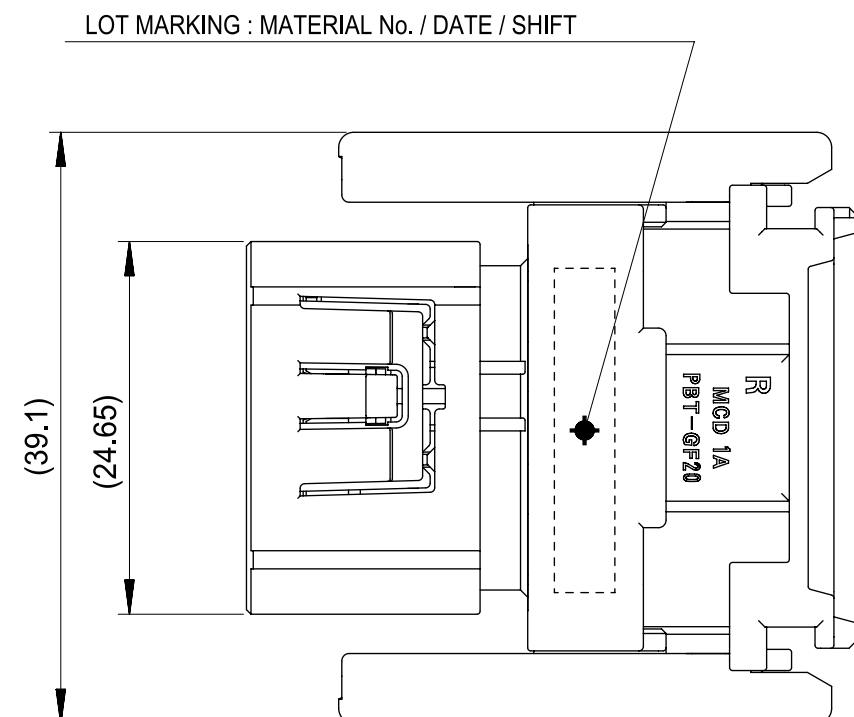
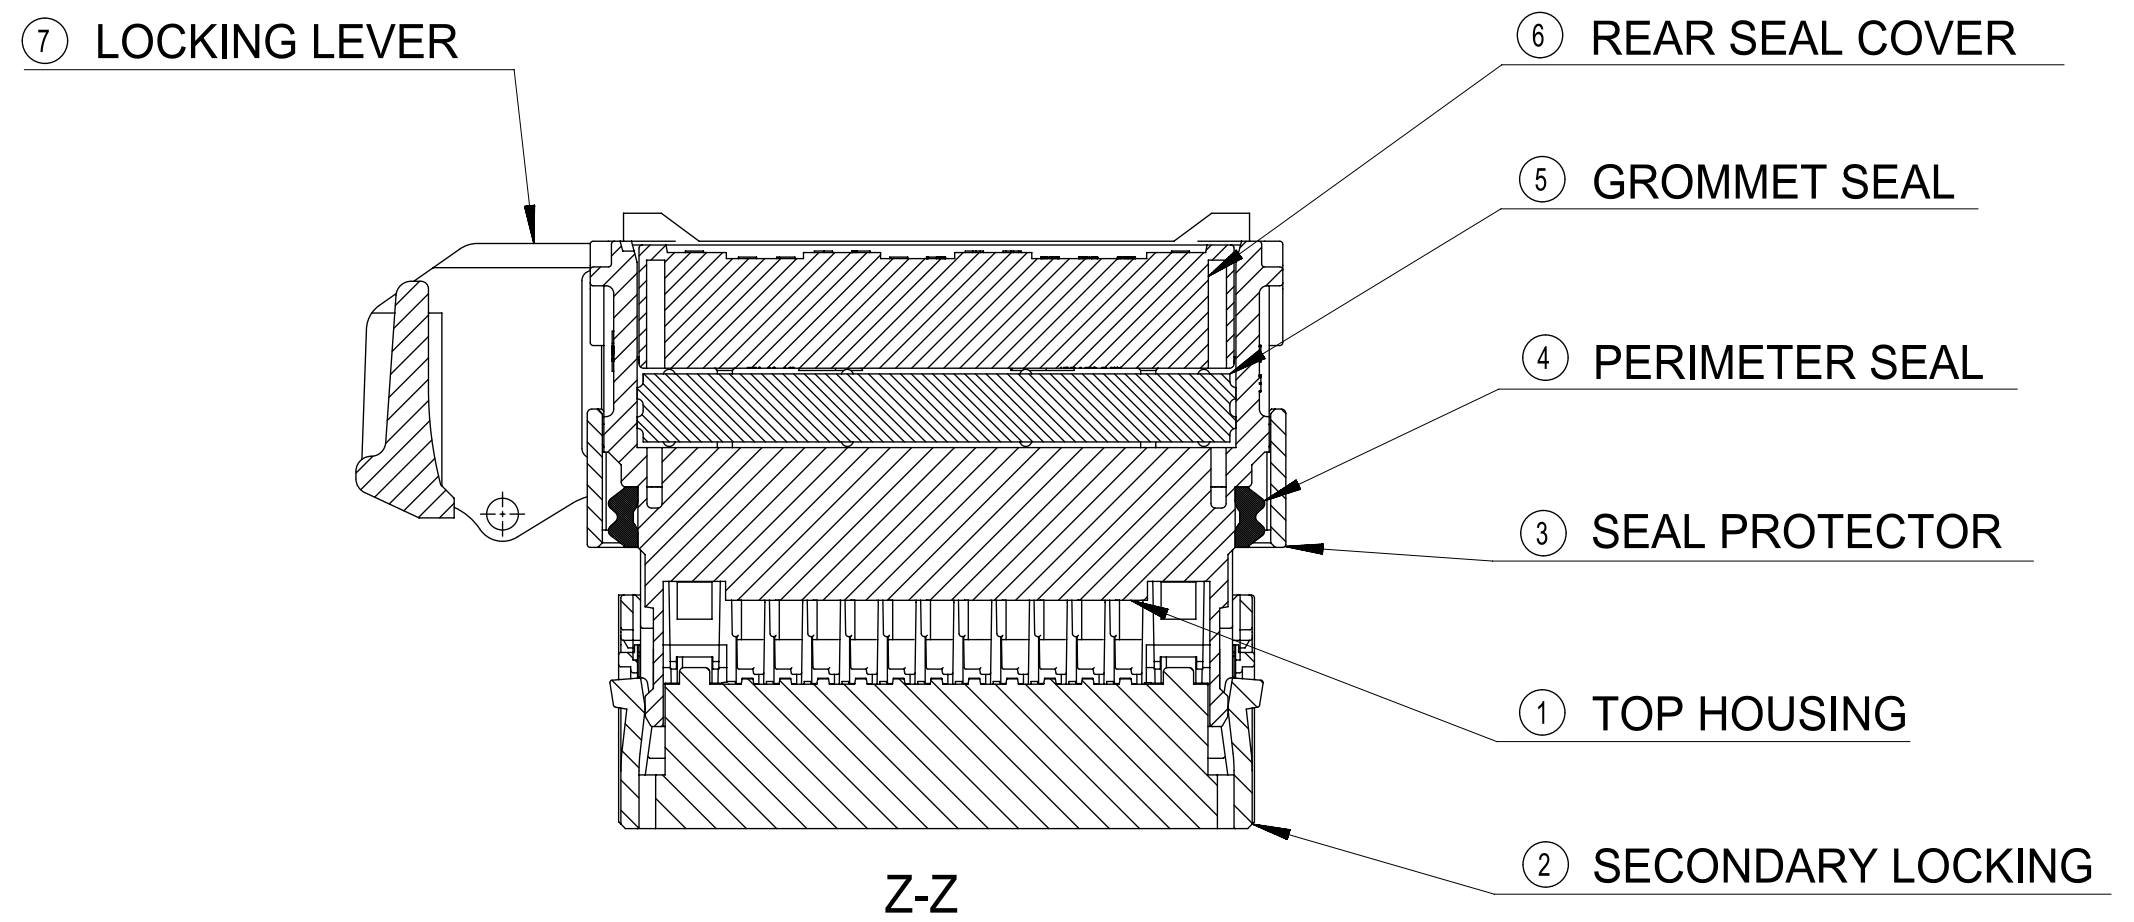
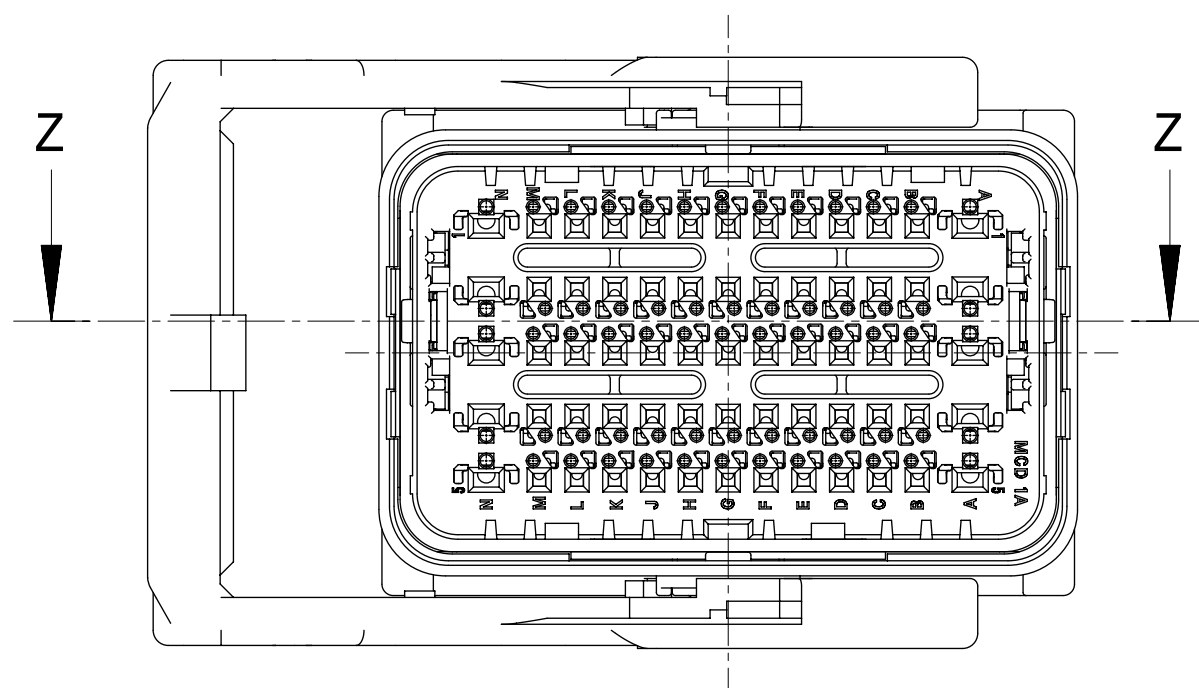
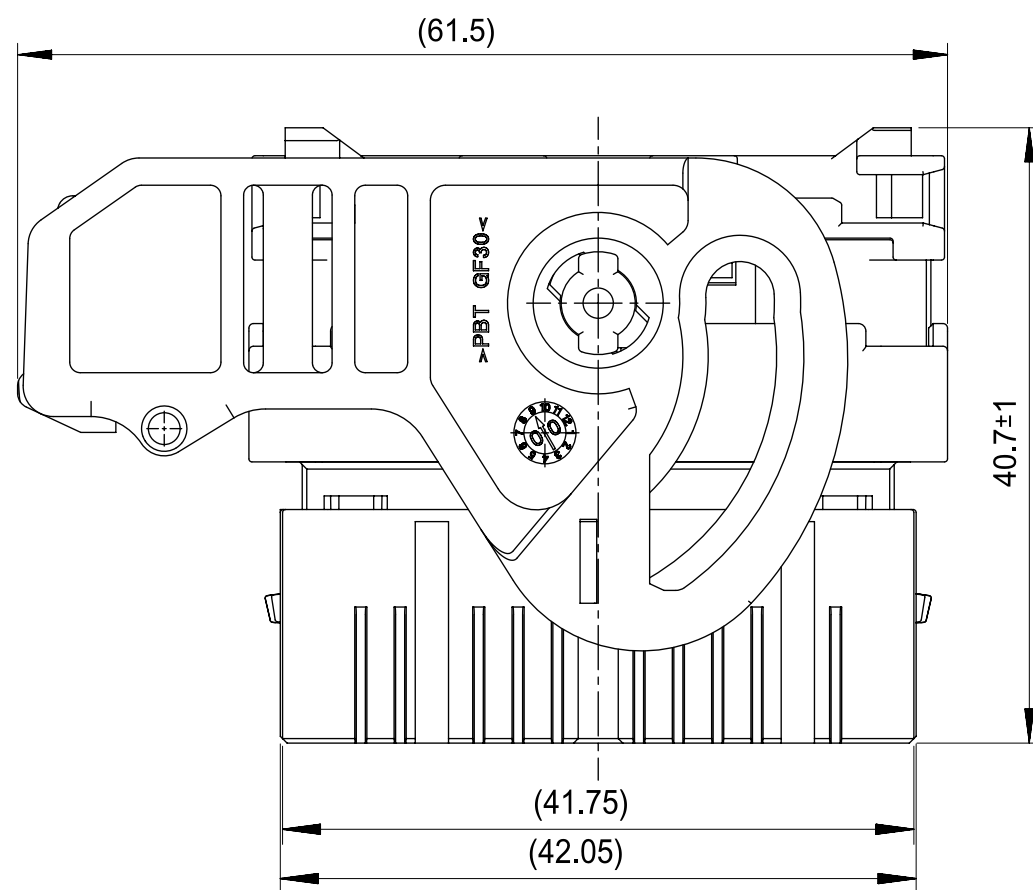


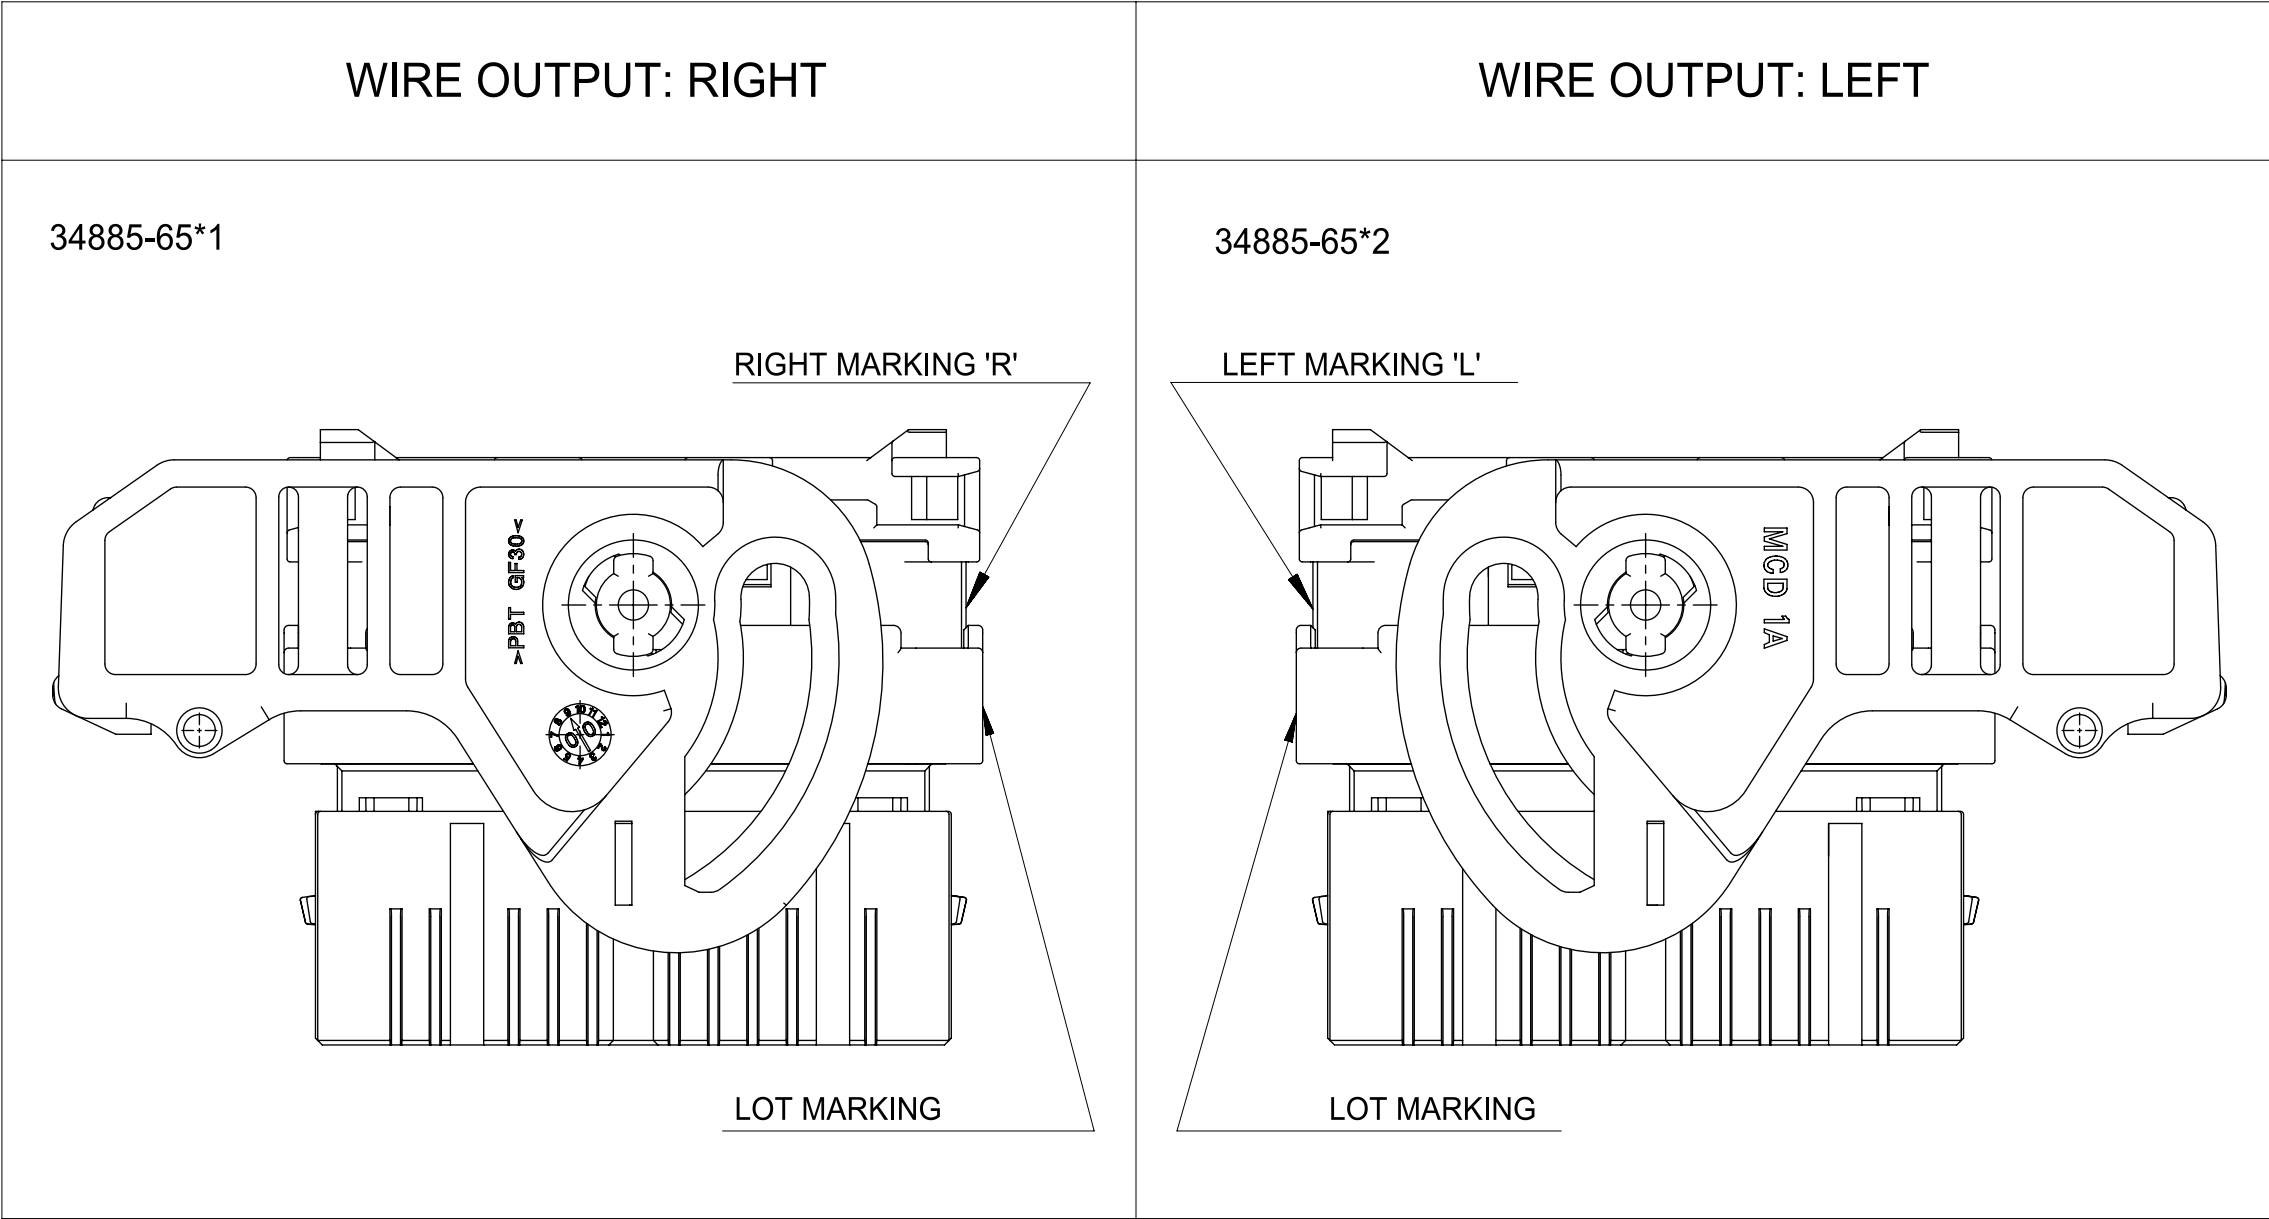

LEFT	34885-6522	BROWN	PRODUCTION
	34885-6512	BLACK	PRODUCTION
RIGHT	34885-6521	BROWN	PRODUCTION
	34885-6511	BLACK	PRODUCTION
WIRE OUTPUT(LEVER DIRECTION)	MATERIAL NO.	CODING	PRODUCT STATUS

B	① TOP HOUSING	PBT G.F.	BLACK
	② SECONDARY LOCKING	PBT G.F.	BLACK / BROWN
	③ SEAL PROTECTOR	PBT G.F.	BLACK
	④ PERIMETER SEAL	SILICONE	BLUE
A	⑤ GROMMET SEAL	SILICONE	BLUE
	⑥ REAR SEAL COVER	PBT G.F.	BLACK
	⑦ LOCKING LEVER	PBT G.F.	BLACK
	PART NAME	MATERIAL	COLOR

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC: REVISED											
MM		2:1													
GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± * 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±				molex CMX CONNECTOR 65WAY ASSY											
										PRODUCT SALES DRAWING					
				STATUS: Production DRWN: Raghu GV2023-11-21 CHK'D: Youngjun Choi2023-11-24 APPR: Masayuki Unemoto2023-11-24				DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
								SD-34885-002		PSD		001		B1	
								MATERIAL NUMBER		CUSTOMER		SHEET NUMBER			
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		SEE CHART	
						A2-SIZE		34885							

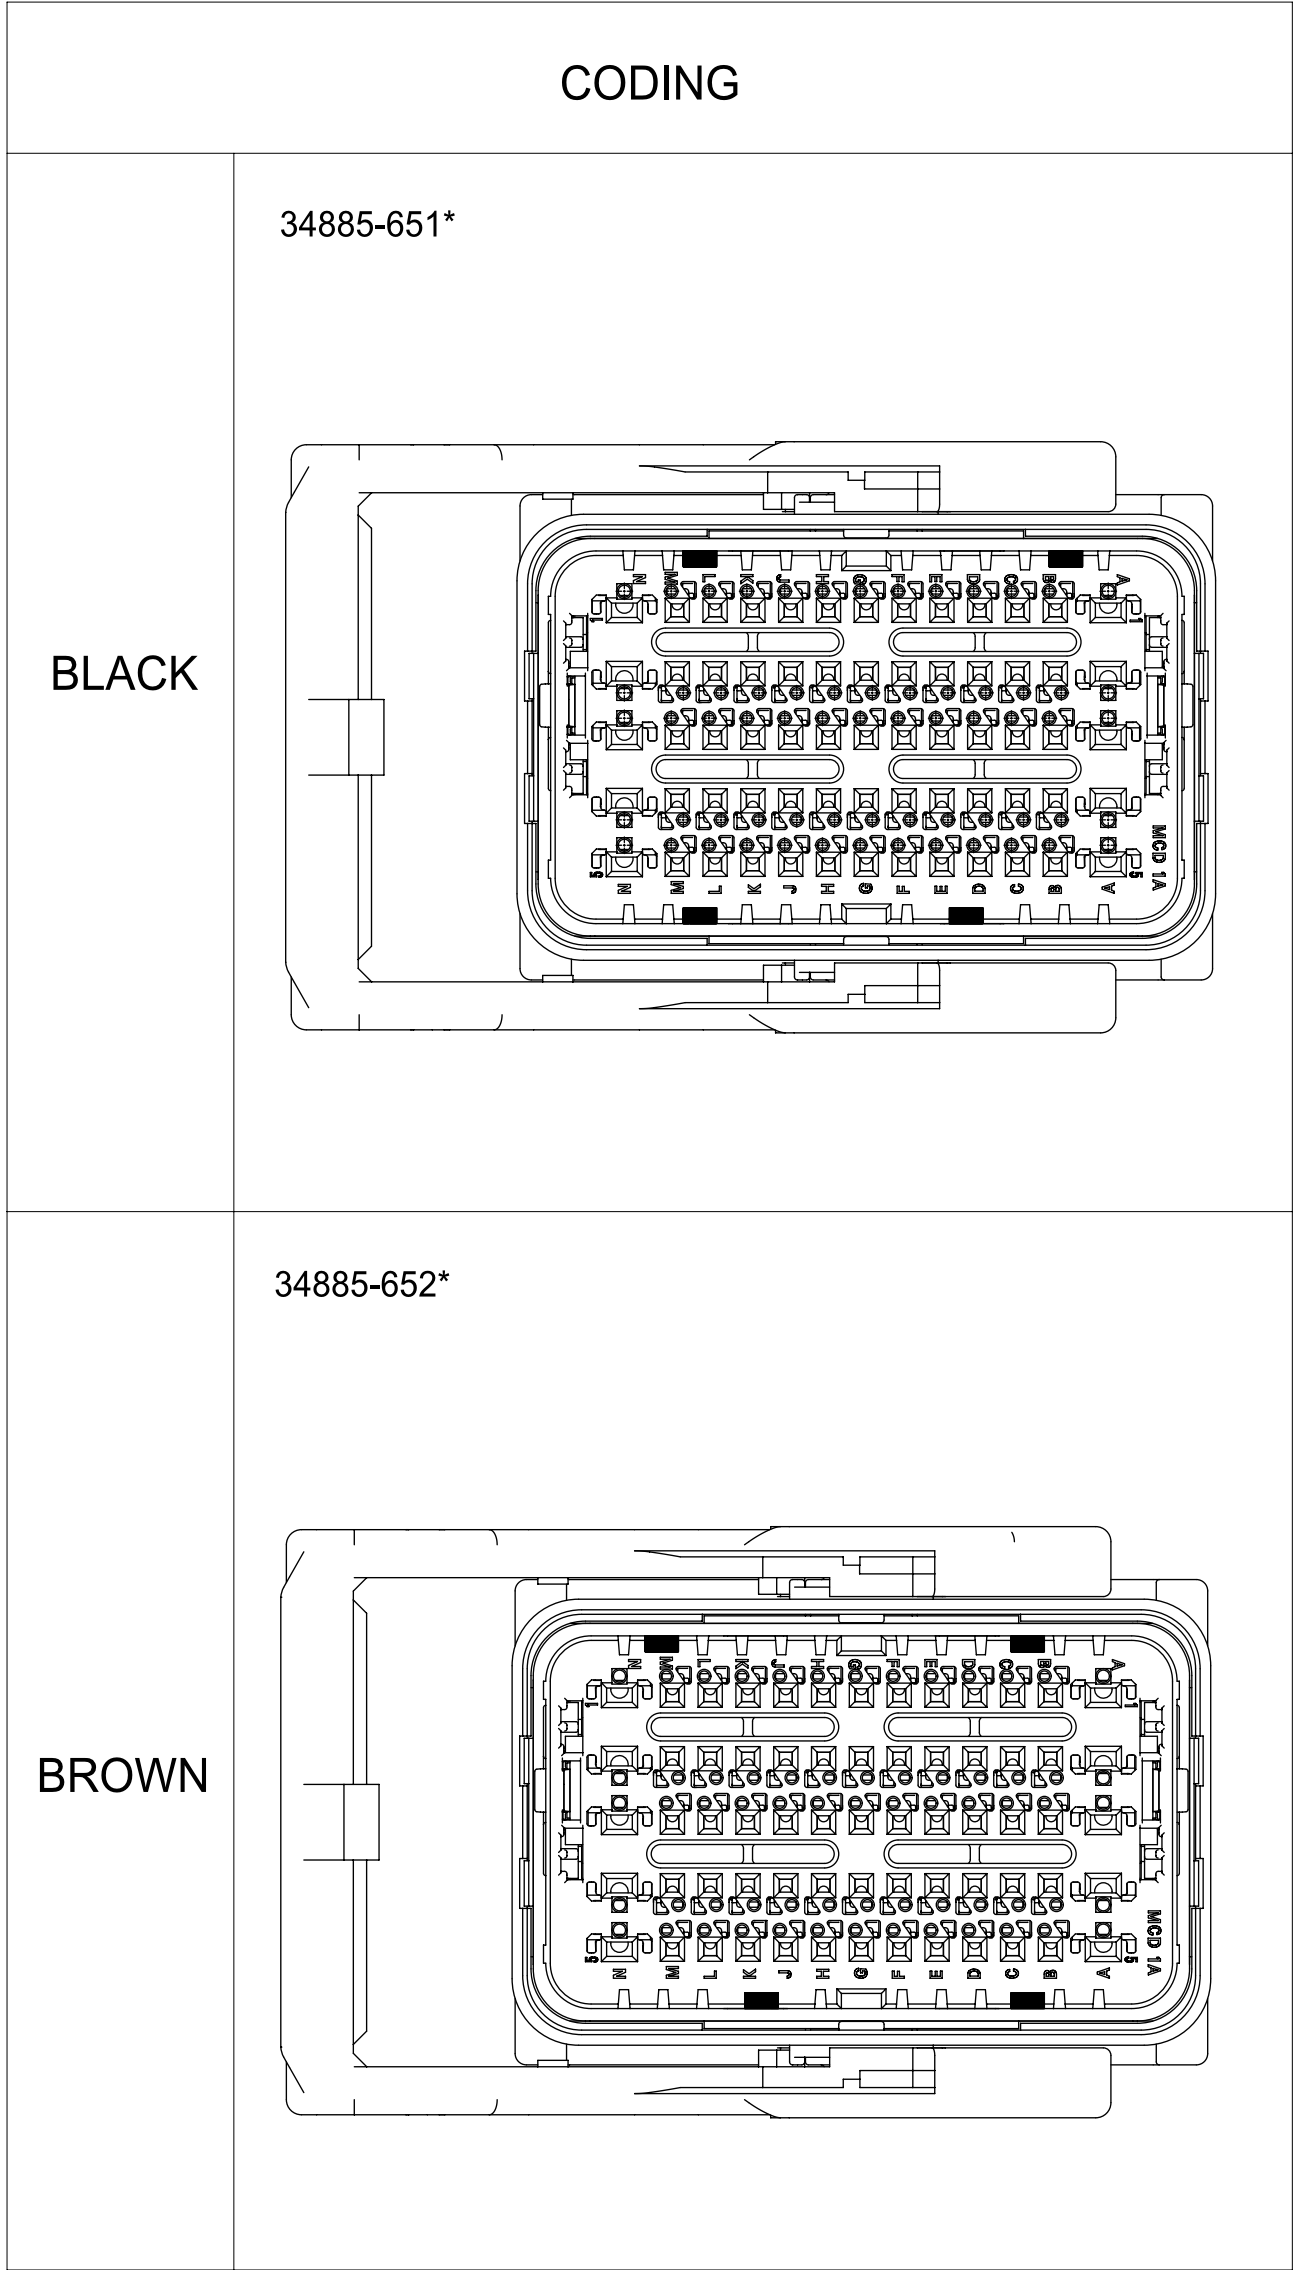

< APPLICABLE TERMINAL AND WIRE SIZE >						
CIRCUIT	APPLICABLE TERMINAL	PART NO.	JASO WIRE SIZE		ISO WIRE SIZE	
			APPLICABLE WIRE SIZE	INSULATION DIAMETER (mm)	APPLICABLE WIRE SIZE	INSULATION DIAMETER (mm)
SIGNAL	CTX64 TERMINAL	34803-3211	AVSS / CAVS 0.3sq	1.4 - 1.5	THIN WALL 0.35sq	1.25 - 1.4
		34803-3212	AVSS / CAVS 0.5 - 0.85sq	1.6 - 1.9	THIN WALL 0.5 - 0.75sq	1.4 - 1.9
POWER	CTX150 TERMINAL	34805-0111	AVSS/ CAVS 0.5sq	1.6 - 1.7	-	-
		34805-0112	AVSS/ CAVS 0.85sq -1.25sq	1.8 - 2.2	THIN WALL 0.75 - 1sq	1.6 - 2.15
		34805-0113	AVSS / CAVS 1.25 - 2sq	2.1 - 2.7	THIN WALL 1.5 - 2sq	2.1 - 2.8

- NOTES:
- 1 - BLACK CODING SHOWN
 - 2 - APPLICABLE TERMINAL
SIGNAL
CTX64 TERMINAL 34803-3211, 34803-3212
POWER
CTX150 TERMINAL 34805-0111, 34805-0112, 34805-0113
 - 3 - APPLICABLE WIRE CAP: 502730-0001
 - 4 - APPLICABLE SPECIFICATION: AS-34885-002
 - 5 - ELV and RoHS COMPLIANT

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS	SCALE	CURRENT REV DESC: REVISED					
MM	2:1						
GENERAL TOLERANCES (UNLESS SPECIFIED)		STATUS: Production DRWN: Raghu GV CHK'D: Youngjun Choi APPR: Masayuki Unemoto					
ANGULAR TOL	± °						
4 PLACES	±						
3 PLACES	±						
2 PLACES	±						
1 PLACE	±						
0 PLACES	±						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
			A2-SIZE	34885	SEE CHART	GENERAL MARKET	2 OF 2

CMX CONNECTOR
65WAY ASSY

PRODUCT SALES DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
SD-34885-002	PSD	001	B1